




TECHNICAL DATA

TYRES FOR AGRICULTURE

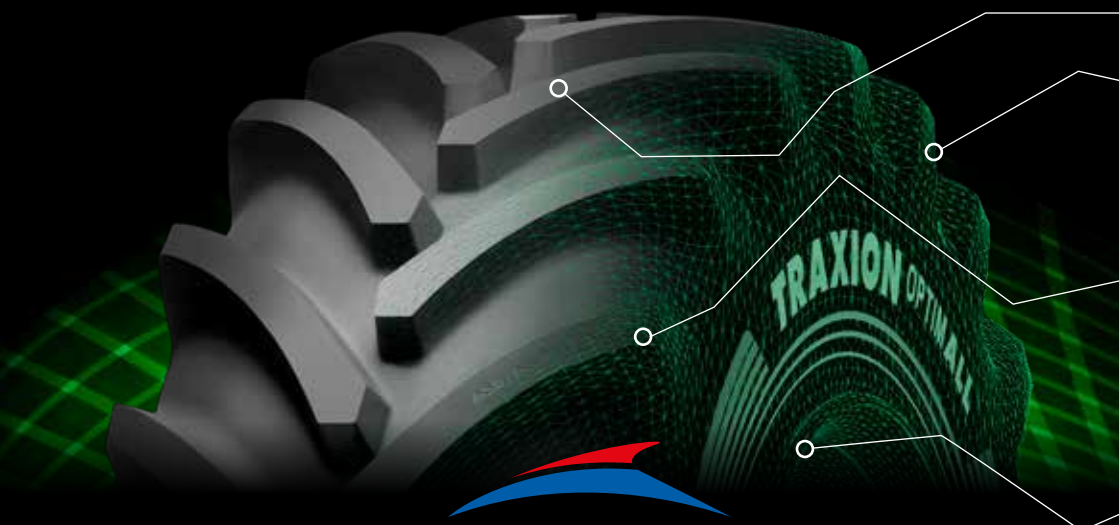

**REDESTEIN**
YOUR PERFORMANCE TYRES SINCE 1909

CONTENTS

	General	2-7
	Contents	2
	Sizes and pages	4
	DLG recognition	6
	Tractor tyres	9-95
	Radial tractor tyre conversion table	10
	DRIVE RADIAL	
	Traxion Optimall	12
	TraxionXXL	22
	Traxion 65	34
	Traxion+ 65-series	46
	Traxion+ 70-series	48
	Traxion 85	64
	DRIVE BIAS	
	Faktor-S	80
	FRONT	
	Multi Rill	86
	Lug Ring	90
	Faktor-F	93
	Harvester tyres	97-117
	DRIVE WHEEL	
	Traxion Harvest	98
	Traxion Optimall	108
	TraxionXXL	109
	STEERING WHEEL	
	Traxion Harvest	110
	Traxion Versa	116
	TraxionXXL / Traxion+	117
	Agri industrial tyres	119-133
	SOFT SURFACE	
	Traxion Versa	120
	HARD SURFACE	
	Endurion	126
	Trailer and implement tyres	135-195
	Radial implement tyre conversion table	136
	RADIAL	
	Flotation Trac	138
	Flotation Pro	158
	BIAS	
	Flotation+	168
	A.W.	180
	A.S.	190
	V61	194

 Small tyres	197-229
AGRICULTURAL	
V50	198
V60	199
V61	199
V64	200
V64+	200
V67	200
LAWN- AND GROUNDSCAPE	
Greentrax	208
V71	209
V88	209
UTILITY	
V20	214
V25	214
V40	215
V52	215
V76	216
FAST TRAILER	
V47	222
V48	222
V49	223
V54	223
V71	224
V90	224
 Technical information and tubes	230-246
General texts for the graphs and tables	231
Service description	231
Instructions for use of load capacity graphs	232
Tubes	234
Valves	235
Rim and wheel discs	236
Recommendations to extend the life-span	238
Determining gear ratio, rolling circumference and front wheel lead	240
Fitting instructions	243
Weight transfer	244
Names	244
General remarks	248
Symbols and abbreviations	248

General



Tractor tyres



Harvester tyres



Agri industrial tyres



Trailer and
implement tyres



Small tyres



Technical information
and tubes



SIZES AND PAGES

TRACTOR TYRES						HARVESTER TYRES	
DRIVE RADIAL			DRIVE BIAS			DRIVE AXLE	
TRAXION OPTIMALL			TRAXION+ 70-SERIES			TRAXION HARVEST	
VF 600/70 R 30 PFO NRO	14		240/70 R 16	50	9.5 - 24	620/75 R 26	100
VF 620/75 R 30 PFO	14		260/70 R 16	50	11.2 - 24	650/75 R 32	100
VF 600/70 R 34 PFO NRO	15		280/70 R 16	51	12.4 - 24	680/85 R 32	101
VF 650/60 R 34 PFO NRO	15		280/70 R 18	51	13.6 - 24	680/85 R 32 CHO	102
VF 650/65 R 34 PFO NRO	16		260/70 R 20	52	14.9 - 24	800/65 R 32	102, 103
VF 710/60 R 34 PFO NRO	16		280/70 R 20	52	11.2 - 28	800/65 R 32 CHO	103
VF 650/85 R 38 PFO	17		300/70 R 20	53	12.4 - 28	800/70 R 32	104, 105
VF 800/70 R 38 PFO	17		320/70 R 20	53	13.6 - 28	800/70 R 32 CHO	104
VF 650/85 R 42 PFO	18		360/70 R 20	54	14.9 - 28	900/60 R 32	105, 106
VF 710/70 R 42 PFO	18		380/70 R 20	54	16.9 - 28	900/60 R 32 CHO	106
VF 710/75 R 42 PFO	19		320/70 R 24	55	16.9 - 30	800/70 R 38	107
VF 800/70 R 42 PFO	19		360/70 R 24	55	18.4 - 30	800/70 R 38 CHO	107
VF 900/60 R 42 PFO NRO	20		380/70 R 24	56	12.4 - 32		
TRAXIONXXL			420/70 R 24			See also	
540/75 R 28	24		480/70 R 24	57	16.9 - 34	Traxion Optimall	
600/65 R 28	24, 25		380/70 R 28	57	18.4 - 34	TraxionXXL	
600/70 R 28	25		420/70 R 28	58			
600/70 R 30	26		480/70 R 28	58			
710/60 R 30	26		480/70 R 30	59			
800/65 R 32	27		480/70 R 34	59			
600/70 R 34	27		520/70 R 34	60			
650/75 R 38	28		480/70 R 38	60	5.00 - 15	94	
650/85 R 38	28		520/70 R 38	61	11.5/80 - 15.3	87	
710/70 R 38	29		580/70 R 38	61	5.50 - 16	87, 91, 94	
710/75 R 38	30		620/70 R 42	62	6.00 - 16	87, 91, 94	
800/70 R 38	30		TRAXION 85		6.50 - 16	87, 91, 94	
900/60 R 38	31		280/85 R 24	66	7.50 - 16	87, 88, 91, 94	
710/70 R 42	31		320/85 R 24	67	9.00 - 16	88	
710/75 R 42	32		340/85 R 24	67	10.00 - 16	88, 95	
TRAXION 65			380/85 R 24	68	11.00 - 16	88, 95, 95	
320/65 R 16	36		420/85 R 24	68	7.50 - 18	88, 91, 92, 95	
320/65 R 18	36		280/85 R 28	69	4.00 - 19	95	
340/65 R 18	37		320/85 R 28	69	6.00 - 19	89, 92	
420/65 R 20	37		340/85 R 28	70	7.50 - 20	89, 95	
440/65 R 24	38		380/85 R 28	70			
480/65 R 24	38		420/85 R 28	71			
540/65 R 24	39		380/85 R 30	71			
440/65 R 28	39		420/85 R 30	72			
480/65 R 28	40		460/85 R 30	72			
540/65 R 28	40		380/85 R 34	73			
540/65 R 30	41		420/85 R 34	73			
540/65 R 34	42		460/85 R 34	74			
600/65 R 34	43		340/85 R 38	74			
540/65 R 38	43		380/80 R 38	75			
600/65 R 38	44		420/85 R 38	75			
650/65 R 38	44		460/85 R 38	76			
650/65 R 42	45		520/85 R 38	76			
			480/80 R 42	77			
			520/85 R 42	77			
			480/80 R 46	78			
			520/85 R 46	78			
			480/80 R 50	79			
Sizes TRAXION+ 65 on page 46							

FRONT		STEERING AXLE	
MULTI RILL		TRAXION HARVEST	
LUG RING		460/70 R 24	111
FAKTOR-F		500/70 R 24	112
5.00 - 15	94	500/85 R 24	112
11.5/80 - 15.3	87	500/80 R 28	113
5.50 - 16	87, 91, 94	600/65 R 28	113
6.00 - 16	87, 91, 94	500/85 R 30	114
6.50 - 16	87, 91, 94	620/70 R 30	114
7.50 - 16	87, 88, 91, 94		
9.00 - 16	88	See also	
10.00 - 16	88, 95	Traxion Versa	
11.00 - 16	88, 95, 95	TraxionXXL/ Traxion 65	
7.50 - 18	88, 91, 92, 95		
4.00 - 19	95		
6.00 - 19	89, 92		
7.50 - 20	89, 95		

AGRI INDUSTRIAL TYRES			
SOFT SURFACE		HARD SURFACE	
TRAXION VERSA		ENDURION	
340/80 R 18 IND	122	340/80 R 18 IND	128
400/70 R 20 IND	122	400/70 R 18 IND	128
400/70 R 24 IND	123	340/80 R 20 IND	129
400/80 R 24 IND	123	400/70 R 20 IND	129
460/70 R 24 IND	124	400/70 R 24 IND	130
500/70 R 24 IND	124	400/80 R 24 IND	130
480/80 R 26 IND	125	460/70 R 24 IND	131
440/80 R 28 IND	125	500/70 R 24 IND	131
		480/80 R 26 IND	132
		440/80 R 28 IND	132

TRAILER AND IMPLEMENT TYRES	
RADIAL	BIAS
FLOTATION TRAC	FLOTATION+
480/45 R 17 IMP 140	260/70 - 15.3 IMP 170, 171
520/50 R 17 IMP 140, 141	300/80 - 15.3 IMP 171, 172
500/45 R 22.5 IMP 141	400/60 - 15.5 IMP 173
520/55 R 22.5 IMP 142	340/55 - 16 IMP 173
560/45 R 22.5 IMP 143	380/55 - 17 IMP 174
560/60 R 22.5 IMP 144	480/45 - 17 IMP 175
580/65 R 22.5 IMP 145	500/50 - 17 IMP 176
600/50 R 22.5 IMP 145	400/70 - 20 IMP 177
650/40 R 22.5 IMP 146	460/65 - 20 IMP 177
680/50 R 22.5 IMP 147	500/55 - 20 IMP 178
710/40 R 22.5 IMP 148	560/60 - 22.5 IMP 178
710/45 R 22.5 IMP 148	600/55 - 22.5 IMP 179
800/40 R 22.5 IMP 149	710/45 - 22.5 IMP 179
710/65 R 26 IMP 149	A.W.
600/55 R 26.5 IMP 150	7.00 - 12 IMP 182
650/55 R 26.5 IMP 150	10.0/80 - 12 IMP 182
650/65 R 26.5 IMP 151	10.0/75 - 15.3 IMP 183
710/50 R 26.5 IMP 151	11.5/80 - 15.3 IMP 184
750/45 R 26.5 IMP 152	12.5/80 - 15.3 IMP 185
800/45 R 26.5 IMP 152	13.0/75 - 16 IMP 185
600/60 R 30.5 IMP 153	13.5/75 - 430.9 IMP 186
650/65 R 30.5 IMP 153	15.0/55 - 17 IMP 186
710/50 R 30.5 IMP 154	19.0/45 - 17 IMP 187
750/60 R 30.5 IMP 154	500/50 - 17 IMP 187
800/45 R 30.5 IMP 155	12.5/80 - 18 IMP 188
850/50 R 30.5 IMP 155	15.0/70 - 18 IMP 188
800/60 R 32 IMP 156	A.S.
900/65 R 32 IMP 156	7.00 - 12 IMP 192
900/65 R 38 IMP 157	10.0/75 - 15.3 IMP 192
FLOTATION PRO	11.5/80 - 15.3 IMP 193
560/45 R 22.5 IMP 160	15.0/55 - 17 IMP 193
560/60 R 22.5 IMP 161, 162	V61
620/40 R 22.5 IMP 162, 163	200/60 - 14.5 IMP 195
620/50 R 22.5 IMP 163, 164	250/65 - 14.5 IMP 195
650/50 R 22.5 IMP 165	
710/40 R 22.5 IMP 165	
620/55 R 26.5 IMP 166	
710/50 R 26.5 IMP 166	
800/45 R 26.5 IMP 167	

SMALL TYRES	
AGRICULTURAL	UTILITY
V50, V60, V61 V64, V64+, V67	V20, V25, V40 V52, V76
3.00 - 4 202, 205	200 x 50 218
4.00 - 4 202, 205	260 x 85 218, 220
3.50 - 6 202, 204, 206	4.10/3.50 - 4 220
15x6.00 - 6 203	4.00 - 4 218, 220, 212
160/65 - 6 204	3.50 - 6 218
3.50 - 8 203, 206	4.10/3.50 - 6 212
4.00 - 8 203, 206	2.25 - 8 218
5.00 - 8 202	4.00 - 8 218, 212
170/60 - 8 203, 205	4.80/4.00 - 8 219
18x8.50 - 8 203, 204	5.00 - 8 219
210/60 - 8 205	6.00 - 9 219, 220
6.00 - 9 202	
4.00 - 12 206	
LAWN- AND GROUNDSCAPE GREENTRAX V71, V88	FAST TRAILER V47, V48, V49 V54, V71, V90
160/65 - 6 211	3.50 - 8 225
170/60 - 8 211, 213	4.00 - 8 226, 228, 229
18x8.50 - 8 213	4.80 - 8 277
210/60 - 8 211	5.00 - 8 226, 228
250/50 - 8 211	5.70 - 8 228
250/60 - 8 211	16.5x6.5 - 8 229
210/60 - 10 212	18.5x8.5 - 8 227
250/50 - 10 212	6.00 - 9 229
270/50 - 12 212	5.00 - 10 226, 227
320/45 - 12 212	18x8.0 - 10 227
320/55 - 12 212	20.5x8.0 - 10 227

DLG RECOGNITION




PROVEN PERFORMANCE BY DLG

The Vredestein Traxion Optimall was extensively tested by the renowned German institute DLG and awarded with the highly respected designation 'DLG approved'. The VF tyre, was tested against IF and VF tyres of other premium European manufacturers. The test was conducted with two tractors powered over 400HP and the test criteria was focussed on performance in the field (fuel consumption, productivity, traction). The test showed that the Vredestein Traxion Optimall provided a significantly better performance compared to its competitors¹.


Throughout the whole range of 5% up to 40% slippage it was assessed that the Traxion Optimall provided the highest traction, with the biggest advantage over its competitors shown in the main working area of 5% to 20% slippage. In comparison to IF and VF competitors a fuel saving of respectively 7% and 1,7% were found. Similar differences were observed in productivity, leading to benefits for the Traxion Optimall in fuel and labor costs of 7% and 1.7% compared to the IF and the VF competitor tyres. This translates into € 162 and € 40 respectively for cultivating an area of 100 hectares.

FUEL CONSUMPTION




■ Traxion Optimall
■ VF Premium European Competitor
■ IF Premium European Competitor

PRODUCTIVITY



■ Traxion Optimall
■ VF Premium European Competitor
■ IF Premium European Competitor

OPERATING COSTS²



■ Traxion Optimall
■ VF Premium European Competitor
■ IF Premium European Competitor


¹ Based on tests conducted by the independent institute DLG in Bernburg, Germany.
² Assuming fuel costs are € 1,25/l and man hour costs are € 50,00/hr.

About DLG


The DLG (Deutsche Landwirtschafts Gesellschaft) Test Centre in Groß Umstadt, near Frankfurt, is the benchmark for certified agricultural technology and equipment, and is a leader in testing and certification in agriculture (as well as food products). Using modern measuring technologies and testing methods that closely resemble the situation in the field, DLG engineers test new products on a daily basis. The measurements are based on international standards as well as testing methods based on practical requirements developed by DLG.




LARGE FOOTPRINT, LOW CONTACT PRESSURE



VREDESTEIN TRAXION OPTIMALL



VF PREMIUM EUROPEAN COMPETITOR



IF PREMIUM EUROPEAN COMPETITOR

FOOTPRINT AT OPTIMISED TYRE PRESSURE FOR FIELD WORK

	Vredestein Traxion Optimall	VF Premium European competitor	IF Premium European competitor
Minimum tyre pressure	0.65 bar (-25%) (-40%)	0.85 bar	1.05 bar
Footprint surface	5440 cm² (+15%) (+25%)	4740 cm²	4260 cm²
Average contact pressure	0.97 kg/cm² (-13%) (-22%)	1.12 kg/cm²	1.24 kg/cm²

Tests conducted in Vredestein test centre in Enschede, NL. Tyres tested 710/75 R 42 with 5.300 kg load and tyre pressure adjusted for max. 10 km/h field work. All measurement are simulating footprint and pressure in the field.





VREDESTEIN TRAXION OPTIMALL

- ✓ Specific fuel consumption
- ✓ Area treated per hour
- ✓ Kappa/slip ratio

DLG Test Report 6800

TRAXION OPTIMALL

THE NEXT GENERATION VF TYRE

- 7% higher productivity and 7% lower fuel consumption
- 15% larger footprint for less soil compaction and higher yield
- Maximum stability at heavy road transport
- 30% longer life

Data based on DLG test report 6800 conducted by DLG/Vredestein R&D. For more information: www.vredestein.com



VREDESTEIN

YOUR PERFORMANCE TYRES SINCE 1909



TRACTOR TYRES

	pag.
Radial tractor tyre conversion table	10
DRIVE RADIAL	
Traxion Optimall	12
TraxionXXL	22
Traxion 65	34
Traxion+ 65-series	46
Traxion+ 70-series	48
Traxion 85	64
DRIVE BIAS	
Faktor-S	80
FRONT	
Multi Rill	86
Lug Ring	90
Faktor-F	93



RADIAL TRACTOR TYRE CONVERSION TABLE

Diameter range (mm)	SRI	RCI	Imperial size description	Traxion 85, Traxion 85 II	Traxion+, Traxion 70	Traxion 65	TraxionXXL, Traxion Harvest, Traxion Cereall	Traxion Optimall
				80/85-series	70-series	65-series	XL-series	XL-series VF
735	350	28			240/70 R 16			
765	370	29			260/70 R 16			
820	390	30			280/70 R 16	320/65 R 16		
855	410	31			280/70 R 18			
875	425	32			260/70 R 20	320/65 R 18		
905	425	32				340/65 R 18		
	450	33			280/70 R 20			
945	450	33			300/70 R 20			
985	475	34			320/70 R 20			
1050	500	35			360/70 R 20	420/65 R 20		
1090	525	36			380/70 R 20			
			11.2 R 24	280/85 R 24	320/70 R 24			
1145	550	37	12.4 R 24	320/85 R 24	360/70 R 24			
1190	575	38	11.2 R 28	280/85 R 28				
			13.6 R 24	340/85 R 24	380/70 R 24	440/65 R 24		
1245	600	39	12.4 R 28	320/85 R 28				
			14.9 R 24	380/85 R 24	420/70 R 24	480/65 R 24		
1295	625	39	13.6 R 28	340/85 R 28	380/70 R 28	440/65 R 28		
1320	625	39	16.9 R 24	420/85 R 24	480/70 R 24	540/65 R 24		
1350	650	40	14.9 R 28	380/85 R 28	420/70 R 28	480/65 R 28		
1420	675	41	16.9 R 28	420/85 R 28	480/70 R 28	540/65 R 28		
			14.9 R 30	380/85 R 30				
1475	700	42	16.9 R 30	420/85 R 30	480/70 R 30	540/65 R 30	540/75 R 28	
							600/65 R 28	
1525	725	42	18.4 R 30	460/85 R 30			600/70 R 28	
			14.9 R 34	380/85 R 34				
1550	750	43	13.6 R 38	340/85 R 38				
			16.9 R 34	420/85 R 34	480/70 R 34	540/65 R 34	620/75 R 26	
1575	750	43	14.9 R 38	380/80 R 38			600/70 R 30	VF 600/70 R 30
							710/60 R 30	
1645	775	43	18.4 R 34	460/85 R 34	520/70 R 34	600/65 R 34		VF 650/60 R 34
1675	800	44	16.9 R 38	420/85 R 38	480/70 R 38	540/65 R 38	600/70 R 34	VF 620/75 R 30
								VF 600/70 R 34
1750	825	45	18.4 R 38	460/85 R 38	520/70 R 38	600/65 R 38	650/75 R 32	VF 650/65 R 34
								VF 710/60 R 34
1835	875	46	20.8 R 38	520/85 R 38	580/70 R 38	650/65 R 38	800/65 R 32	
1895	925	47	18.4 R 42	480/80 R 42				
							900/60 R 32	
1935	925	47	20.8 R 42	520/85 R 42	620/70 R 42	650/65 R 42	800/70 R 32	
				480/80 R 46			650/75 R 38	
2000	975	48					710/70 R 38	
							710/75 R 38	
2050	975	48	20.8 R 46	520/85 R 46			650/85 R 38	VF 650/85 R 38
				480/80 R 50			800/70 R 38	VF 800/70 R 38
							900/60 R 38	
							710/70 R 42	VF 710/70 R 42
2150	1025	49					710/75 R 42	VF 650/85 R 42
								VF 710/75 R 42
								VF 800/70 R 42
								VF 900/60 R 42

This table provides a full overview of tyres for Tractors, Harvesters and Agri-industrial vehicles that are comparable in terms of external diameter but have different widths.

The classification of the tyres into diameter ranges is indicative and complies with ETRTO guidelines. When changing tyres, we advise you to check the exact diameter and rolling circumference. This information is provided in the technical data for each tyre. We advise you to recalculate the front wheel lead each time the tyre is changed.

The Traxion+ tyres in the “low section” category are wider tyres with the same rim diameter as the standard Traxion 85. The large volume TraxionXXL tyres have a similar external diameter in combination with a smaller rim diameter, which significantly increases the load capacity of the tyres. We recommend that you check the permitted rim width in the technical data for each tyre.



THE VREDESTEIN TRAXION PROFILE

Comfort and maximum lifespan

- Extended lifespan due to extra-large contact area in the comfort zone
- Low rolling resistance
- Optimal steering characteristics
- Low noise level


DRIVING COMFORT IN ALL CONDITIONS

The Traxion provides optimum comfort. The unique shaped cleats gives:

- an extra large cleat contact area in the middle of the tread (the comfort zone)
- lower rolling resistance
- improved steering characteristics

EXCELLENT SELF-CLEANING PROPERTIES

The Traxion tread design features widely spaced cleats in the traction zone. This provides excellent self-cleaning properties on all types of soils and in all difficult soil conditions, maximising traction and grip.

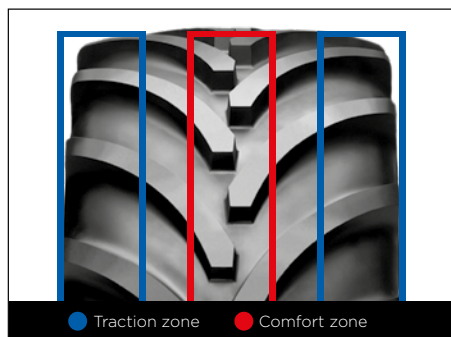

• Non-parallel cleats giving excellent self cleaning properties.

TRACTOR TYRES - DRIVE RADIAL



TRAXION OPTIMAL

THE NEXT GENERATION VF TYRE

FEATURES	BENEFITS
Innovative carcass construction enabling up to 25% lower inflation pressure in the field	7%* higher productivity and 7%* lower fuel consumption
Traxion concept with unique tread compound and high rubber content for 30% better wear resistance	15%** larger footprint for less soil compaction and higher yield
10% higher radial stiffness**	30% longer life***
	Maximum stability at heavy road transport

* According to tests conducted by DLG, compared to premium European IF competitor tyre.
** According to measurements by Vredestein testing dept, compared to premium European VF competitor tyre.
*** According to Vredestein R&D compared to premium European IF and VF competitor tyres.



TRAXION OPTIMALL

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page	
30	VF 600/70 R 30 PFO NRO	168 D	2,0	DW21B	620	1590	695	4675	14	
	VF 620/75 R 30 PFO	172 D	2,0	DW23B	665	1665	725	4920	14	
34	VF 600/70 R 34 PFO NRO	170 D	2,0	DW21B	610*	1695*	745*	5035*	15	N
	VF 650/60 R 34 PFO NRO	168 D	2,0	DW23B	670	1660	750	4935	15	
	VF 650/65 R 34 PFO NRO	170 D	2,0	DW23B	655	1715	775	5100	16	
	VF 710/60 R 34 PFO NRO	173 D	2,0	DW25B	705	1705	780	5080	16	
38	VF 650/85 R 38 PFO	182 D	2,0	DW23B	670*	2060*	900*	6105*	17	N
	VF 800/70 R 38 PFO	187 D	2,0	DW27B	805	2060	900	6100	17	
42	VF 650/85 R 42 PFO	183 D	2,0	DW23B	670*	2160*	950*	6395*	18	N
	VF 710/70 R 42 PFO	182 D	2,0	DW25B	730	2060	910	6110	18	
	VF 710/75 R 42 PFO	184 D	2,0	DW25B	730	2160	965	6390	19	
	VF 800/70 R 42 PFO	189 D	2,0	DW27B	800	2165	930	6380	19	
	VF 900/60 R 42 PFO NRO	189 D	2,0	DW30B	875	2145	920	6315	20	

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values

PFO (Pressure Field Operation)

Vredestein Very high Flexion (VF) tractor tyres with the marking Pressure Field Operation (PFO) are in conformity with a new Experimental Standard registered by the European Tyre and Rim Technical Organisation (ETRTO) in 2019. PFO tyres - marked with PFO as a suffix after the size designation - are allowed to be operated at lower inflation pressures at lower speeds (especially in the field) compared to standard VF tyres.

TRACTOR TYRES - DRIVE RADIAL

VF 600/70 R 30 PFO NRO 168 D TL Traxion Optimall

EAN		8714692350658				Section width		620 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1590 mm			
Tyre construction		Radial				Static loaded radius		695 mm			
Recommended rim width		DW21B				Rolling circumference		4675 mm			
Permitted rim width		W/DW18L (NRO), DW20B				SRI		750			
						Tread depth		54 mm			
						75% of the tyre volume		384 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	3225	3720	4190	4690	5185	5655	6155	6575	6795	7000
	10H	3040	3545	4050	4555	5065	5560	5860	6050		
	25	3065	3575	4090	4600	5110	5615	5915	6105		
	30	3040	3545	4050	4555	5065	5560	5860	6050		
	40	2955	3445	3940	4430	4925	5410	5695	5880		
	50	2900	3380	3865	4345	4830	5305	5590	5770		
	65	2815	3280	3750	4220	4690	5150	5425	5600		
	70	2560	2985	3415	3840	4265	4685	4935	5095		

For remarks and the explanation of abbreviations, see inside of the last page.

VF 620/75 R 30 PFO 172 D TL Traxion Optimall

EAN		8714692350672				Section width				665 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1665 mm	
Tyre construction		Radial				Static loaded radius				725 mm	
Recommended rim width		DW23B				Rolling circumference				4920 mm	
Permitted rim width		DW20B, DW21B				SRI				800	
						Tread depth				56 mm	
						75% of the tyre volume				509 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	3615	4175	4700	5260	5815	6345	6900	7375	7620	7875
	10H	3405	3975	4545	5110	5680	6265	6570	6805		
	25	3440	4010	4585	5160	5730	6320	6630	6865		
	30	3405	3975	4545	5110	5680	6265	6570	6805		
	40	3315	3865	4415	4970	5520	6090	6390	6615		
	50	3250	3790	4335	4875	5415	5975	6265	6490		
	65	3155	3680	4205	4730	5260	5800	6085	6300		
	70	2870	3350	3830	4305	4785	5280	5535	5735		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION OPTIMALL

VF 600/70 R 34 PFO NRO 170 D TL Traxion Optimall											
EAN		8714692360374				Section width		610* mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1695* mm			
Tyre construction		Radial				Static loaded radius		745* mm			
Recommended rim width		DW21B				Rolling circumference		5035* mm			
Permitted rim width		W/DW18L (NRO), DW20B				SRI		800			
						Tread depth		58 mm			
						75% of the tyre volume		440 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	3405	3930	4425	4955	5480	5975	6500	6950	7180	7500
	10H	3210	3745	4280	4815	5350	5885	6190	6480		
	25	3240	3780	4320	4860	5400	5940	6250	6540		
	30	3210	3745	4280	4815	5350	5885	6190	6480		
	40	3120	3640	4160	4680	5200	5725	6020	6300		
	50	3060	3570	4080	4590	5100	5615	5905	6180		
	65	2970	3470	3965	4460	4955	5450	5730	6000		
	70	2705	3155	3605	4055	4510	4960	5215	5460		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

VF 650/60 R 34 PFO NRO 168 D TL Traxion Optimall											
EAN		8714692344848				Section width		670 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1660 mm			
Tyre construction		Radial				Static loaded radius		750 mm			
Recommended rim width		DW23B				Rolling circumference		4935 mm			
Permitted rim width		DW20B (NRO), DW21B				SRI		775			
						Tread depth		58 mm			
						75% of the tyre volume		457 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	3175	3665	4125	4615	5105	5570	6060	6520	6770	7000
	10H	2990	3490	3990	4485	4985	5560	5800	6050		
	25	3020	3520	4025	4530	5030	5615	5855	6105		
	30	2990	3490	3990	4485	4985	5560	5800	6050		
	40	2910	3395	3875	4360	4845	5410	5640	5880		
	50	2855	3330	3805	4280	4755	5305	5530	5770		
	65	2770	3230	3695	4155	4615	5150	5370	5600		
	70	2520	2940	3360	3780	4200	4685	4890	5095		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

VF 650/65 R 34 PFO NRO 170 D TL Traxion Optimall

EAN		8714692344862				Section width				655 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1715 mm	
Tyre construction		Radial				Static loaded radius				775 mm	
Recommended rim width		DW23B				Rolling circumference				5100 mm	
Permitted rim width		DW20B (NRO), DW21B				SRI				825	
						Tread depth				58 mm	
						75% of the tyre volume				508 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	3510	4050	4560	5105	5645	6155	6695	6995	7260	7500
	10H	3305	3860	4410	4960	5510	5885	6225	6480		
	25	3335	3895	4450	5005	5560	5940	6280	6540		
	30	3305	3860	4410	4960	5510	5885	6225	6480		
	40	3215	3750	4285	4820	5360	5725	6050	6300		
	50	3155	3680	4205	4730	5255	5615	5935	6180		
	65	3060	3570	4080	4590	5105	5450	5765	6000		
	70	2785	3250	3715	4180	4645	4960	5245	5460		

For remarks and the explanation of abbreviations, see inside of the last page.

VF 710/60 R 34 PFO NRO 173 D TL Traxion Optimall

EAN		8714692350696				Section width				705 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1705 mm	
Tyre construction		Radial				Static loaded radius				780 mm	
Recommended rim width		DW25B				Rolling circumference				5080 mm	
Permitted rim width		DW23B (NRO)				SRI				825	
						Tread depth				56 mm	
						75% of the tyre volume				539 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	3640	4200	4730	5290	5855	6385	6945	7475	7760	8125
	10H	3430	4000	4570	5145	5715	6265	6650	7020		
	25	3460	4035	4615	5190	5770	6320	6710	7085		
	30	3430	4000	4570	5145	5715	6265	6650	7020		
	40	3335	3890	4445	5000	5555	6090	6465	6825		
	50	3270	3815	4360	4905	5450	5975	6340	6695		
	65	3175	3705	4235	4760	5290	5800	6155	6500		
	70	2890	3370	3850	4335	4815	5280	5605	5915		

For remarks and the explanation of abbreviations, see inside of the last page.

VF 650/85 R 38 PFO 182 D TL Traxion Optimall

EAN				8714692360398		Section width				670* mm	
Nominal tyre pressure				2,0 bar		Overall diameter				2060* mm	
Tyre construction				Radial		Static loaded radius				900* mm	
Recommended rim width				DW23B		Rolling circumference				6105* mm	
Permitted rim width				DW20B, DW21B		SRI				975	
						Tread depth				62 mm	
						75% of the tyre volume				734 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	4820	5570	6270	7015	7760	8460	9205	9840	10165	10625
	10H	4545	5305	6060	6820	7575	8370	8765	9180		
	25	4585	5350	6115	6880	7645	8450	8845	9265		
	30	4545	5305	6060	6820	7575	8370	8765	9180		
	40	4420	5155	5890	6630	7365	8140	8520	8925		
	50	4335	5055	5780	6500	7225	7985	8360	8755		
	65	4210	4910	5610	6315	7015	7750	8115	8500		
	70	3830	4470	5105	5745	6385	7055	7385	7735		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

VF 800/70 R 38 PFO 187 D TL Traxion Optimall

EAN				8714692350733				Section width				805 mm									
Nominal tyre pressure				2,0 bar				Overall diameter				2060 mm									
Tyre construction				Radial				Static loaded radius				900 mm									
Recommended rim width				DW27B				Rolling circumference				6100 mm									
Permitted rim width				DW25B				SRI				975									
								Tread depth				62 mm									
								75% of the tyre volume				975 l									
		Tyre pressure (bar)																			
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00		2,20		2,40	
		Load capacity per tyre (kg)																			
Speed (km/h)	10L	5605	6475	7290	8155	9020	9835	10705	11440	11820	12190										
	10H	5285	6165	7045	7925	8810	9720	10190	10530												
	25	5335	6220	7110	8000	8890	9810	10285	10630												
	30	5285	6165	7045	7925	8810	9720	10190	10530												
	40	5140	5995	6850	7705	8565	9450	9910	10240												
	50	5040	5880	6720	7560	8400	9270	9720	10045												
	65	4895	5710	6525	7340	8155	9000	9435	9750												
	70	4455	5195	5935	6680	7420	8190	8585	8875												

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

VF 650/85 R 42 PFO 183 D TL Traxion Optimal

EAN		8714692360411				Section width		670* mm			
Nominal tyre pressure		2,0 bar				Overall diameter		2160* mm			
Tyre construction		Radial				Static loaded radius		950* mm			
Recommended rim width		DW23B				Rolling circumference		6395* mm			
Permitted rim width		DW20B, DW21B				SRI		1025			
						Tread depth		62 mm			
						75% of the tyre volume		783 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	5035	5815	6545	7325	8100	8835	9615	10270	10615	10940
	10H	4745	5535	6330	7120	7910	8640	9155	9450		
	25	4790	5590	6385	7185	7985	8720	9240	9540		
	30	4745	5535	6330	7120	7910	8640	9155	9450		
	40	4615	5385	6150	6920	7690	8400	8900	9190		
	50	4525	5280	6035	6790	7545	8240	8730	9015		
	65	4395	5125	5860	6590	7325	8000	8475	8750		
	70	4000	4665	5330	6000	6665	7280	7710	7965		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

VF 710/70 R 42 PFO 182 D TL Traxion Optimal

EAN		8714692350719				Section width		730 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		2060 mm			
Tyre construction		Radial				Static loaded radius		910 mm			
Recommended rim width		DW25B				Rolling circumference		6110 mm			
Permitted rim width		DW23B				SRI		975			
						Tread depth		62 mm			
						75% of the tyre volume		819 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	4860	5615	6320	7070	7825	8530	9285	9920	10250	10625
	10H	4585	5345	6110	6875	7640	8370	8840	9180		
	25	4625	5395	6165	6940	7710	8450	8920	9265		
	30	4585	5345	6110	6875	7640	8370	8840	9180		
	40	4455	5200	5940	6685	7425	8140	8595	8925		
	50	4370	5100	5830	6555	7285	7985	8430	8755		
	65	4245	4950	5660	6365	7070	7750	8185	8500		
	70	3860	4505	5150	5790	6435	7055	7445	7735		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION OPTIMALL

VF 710/75 R 42 PFO 184 D TL Traxion Optimall											
EAN				8714692344909		Section width				730 mm	
Nominal tyre pressure				2,0 bar		Overall diameter				2160 mm	
Tyre construction				Radial		Static loaded radius				965 mm	
Recommended rim width				DW25B		Rolling circumference				6390 mm	
Permitted rim width				DW23B		SRI				1025	
						Tread depth				64 mm	
						75% of the tyre volume				917 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	5170	5965	6720	7515	8315	9065	9865	10545	10895	11250
	10H	4870	5685	6495	7305	8120	8910	9395	9720		
	25	4915	5735	6555	7375	8195	8995	9480	9810		
	30	4870	5685	6495	7305	8120	8910	9395	9720		
	40	4735	5525	6315	7105	7895	8665	9135	9450		
	50	4645	5420	6195	6970	7740	8500	8960	9270		
	65	4510	5260	6015	6765	7515	8250	8700	9000		
	70	4105	4790	5470	6155	6840	7510	7915	8190		

For remarks and the explanation of abbreviations, see inside of the last page.

VF 800/70 R 42 PFO 189 D TL Traxion Optimall																					
EAN				8714692350757				Section width				800 mm									
Nominal tyre pressure				2,0 bar				Overall diameter				2165 mm									
Tyre construction				Radial				Static loaded radius				930 mm									
Recommended rim width				DW27B				Rolling circumference				6380 mm									
Permitted rim width				DW25B				SRI				1025									
								Tread depth				64 mm									
								75% of the tyre volume				1043 l									
		Tyre pressure (bar)																			
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00		2,20		2,40	
		Load capacity per tyre (kg)																			
Speed (km/h)	10L	5855	6760	7610	8515	9420	10270	11175	11940	12340	12875										
	10H	5515	6435	7355	8275	9195	9990	10640	11125												
	25	5570	6495	7425	8350	9280	10085	10740	11225												
	30	5515	6435	7355	8275	9195	9990	10640	11125												
	40	5365	6255	7150	8045	8940	9715	10345	10815												
	50	5260	6140	7015	7890	8770	9530	10145	10610												
	65	5110	5960	6810	7660	8515	9250	9850	10300												
	70	4650	5425	6200	6975	7745	8420	8965	9375												

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

VF 900/60 R 42 PFO NRO 189 D TL Traxion Optimall											
EAN		8714692350771				Section width		875 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		2145 mm			
Tyre construction		Radial				Static loaded radius		920 mm			
Recommended rim width		DW30B				Rolling circumference		6315 mm			
Permitted rim width		DW28B (NRO)				SRI		1025			
						Tread depth		64 mm			
						75% of the tyre volume		1112 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)									
Speed (km/h)	10L	5780	6670	7510	8405	9300	10140	11030	11875	12325	12875
	10H	5445	6355	7260	8170	9080	9990	10565	11125		
	25	5495	6415	7330	8245	9160	10085	10660	11225		
	30	5445	6355	7260	8170	9080	9990	10565	11125		
	40	5295	6180	7060	7945	8825	9715	10270	10815		
	50	5195	6060	6925	7790	8655	9530	10075	10610		
	65	5045	5885	6725	7565	8405	9250	9780	10300		
	70	4590	5355	6120	6885	7650	8420	8900	9375		

For remarks and the explanation of abbreviations, see inside of the last page.



TRAXION^{XXL}

OFFERING HIGHEST EFFICIENCY AND LONGEST LIFE FOR HIGH HP TRACTORS

Unique tread design and compound properties of **TRAXION^{XXL}** ensure longest tyre life.

Characteristic curved lug concept combines excellent traction with optimal comfort.




VREDESTEIN
YOUR PERFORMANCE TYRES SINCE 1909

TRACTOR TYRES - DRIVE RADIAL



TRAXION^{XXL}

OFFERING HIGHEST EFFICIENCY AND
LONGEST LIFE FOR HIGH HP TRACTORS

FEATURES	BENEFITS
Unique curved cleats and compound properties	Extended lifespan
Dedicated traction and comfort zone	Maximized traction and excellent comfort
Largest volume	High load capacity



Ø	Tyre size	Service description	Nominal inflation pressure (bar)	Recommended rim width		 mm	 mm	 mm	 mm	Page
28	540/75 R 28	154 D	2,4	DW18L	565	565	1495	685	4440	24
	600/65 R 28	147 D	1,6	DW18L	595	595	1480	670	4405	24
	600/65 R 28	154 D	2,4	DW18L	595	595	1480	670	4405	25
	600/70 R 28	157 D	2,4	DW20B	610	610	1540	700	4590	25
30	600/70 R 30	158 D	2,4	DW20B	630	630	1590	725	4750	26
	710/60 R 30	162 D	2,4	DW23B	705	705	1610	730	4800	26
32	800/65 R 32	167 A8/B	1,6	DW27B	825	825	1840	845	5490	27
34	600/70 R 34	160 D	2,4	DW18L	610	610	1700	775	5060	27
38	650/75 R 38	169 D	2,4	DW23B	695	695	1935	890	5775	28
	650/85 R 38	173 D	2,4	DW23B	710	710	2070	940	6195	28
	710/70 R 38	166 D	1,6	DW23B	730	730	1930	870	5760	29
	710/70 R 38	171 D	2,4	DW23B	730	730	1930	870	5760	29
	710/75 R 38	174 D	2,4	DW23B	715	715	2000	910	5950	30
	800/70 R 38	178 D	2,4	DW25B	825	825	2065	940	6160	30
	900/60 R 38	178 D	2,4	DW27B	870	870	2040	925	6100	31
42	710/70 R 42	173 D	2,4	DW23B	730	730	2060	940	6140	31
	710/75 R 42	175 D	2,4	DW23B	735	735	2150	980	6395	32

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

540/75 R 28 154 D TL TraxionXXL

EAN		8714692214165					Section width			565 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			1495 mm			
Tyre construction		Radial					Static loaded radius			685 mm			
Recommended rim width		DW18L					Rolling circumference			4440 mm			
Permitted rim width		W/DW16L, W18L					SRI			700			
							Tread depth			50 mm			
							75% of the tyre volume			340 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	2655	3015	3380	3745	4110	4405	4655	4935	5145	5320	5540	5625
	10H	2205	2555	2905	3250	3495	3735	3905	4070	4215	4315		
	25	2270	2635	2995	3350	3600	3850	4020	4195	4345	4445		
	30	2205	2555	2905	3250	3495	3735	3905	4070	4215	4315		
	40		2435	2765	3095	3325	3560	3715	3875	4015	4105		
	50		2335	2655	2970	3190	3415	3565	3715	3850	3940		
	65			2525	2830	3040	3250	3395	3540	3665	3750		
	70			2300	2575	2765	2960	3090	3220	3335	3415		

For remarks and the explanation of abbreviations, see inside of the last page.

600/65 R 28 147 D TL TraxionXXL

EAN		8714692326943			Section width			595 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1490 mm	
Tyre construction		Radial			Static loaded radius			670 mm	
Recommended rim width		DW18L			Rolling circumference			4405 mm	
Permitted rim width		W18L			SRI			700	
					Tread depth			50 mm	
					75% of the tyre volume			370 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2575	2920	3280	3625	3985	4260	4500	4775
	10H	2135	2480	2815	3105	3355	3535		
	25	2200	2555	2900	3200	3455	3645		
	30	2135	2480	2815	3105	3355	3535		
	40		2360	2680	2955	3190	3365		
	50		2260	2570	2835	3060	3230		
	65			2450	2700	2915	3075		
	70			2230	2460	2655	2800		

For remarks and the explanation of abbreviations, see inside of the last page.

600/65 R 28 154 D TL TraxionXXL

EAN		8714692326950				Section width		595 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		1490 mm					
Tyre construction		Radial				Static loaded radius		670 mm					
Recommended rim width		DW18L				Rolling circumference		4405 mm					
Permitted rim width		W18L				SRI		700					
						Tread depth		50 mm					
						75% of the tyre volume		370 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	2610	2960	3320	3675	4035	4320	4555	4835	5045	5280	5510	5625
	10H	2165	2510	2855	3145	3395	3620	3835	4025	4195	4315		
	25	2230	2585	2940	3245	3500	3735	3955	4150	4325	4445		
	30	2165	2510	2855	3145	3395	3620	3835	4025	4195	4315		
	40		2390	2715	2995	3235	3450	3655	3835	3995	4105		
	50		2290	2605	2875	3100	3310	3505	3675	3830	3940		
	65			2480	2735	2955	3150	3335	3500	3650	3750		
	70			2260	2490	2690	2865	3035	3185	3320	3415		

For remarks and the explanation of abbreviations, see inside of the last page.

600/70 R 28 157 D TL TraxionXXL

EAN		8714692244629				Section width		610 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		1540 mm					
Tyre construction		Radial				Static loaded radius		700 mm					
Recommended rim width		DW20B				Rolling circumference		4590 mm					
Permitted rim width		W/DW18L				SRI		725					
						Tread depth		51 mm					
						75% of the tyre volume		405 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	2945	3340	3750	4150	4560	4885	5165	5475	5705	5900	6140	6190
	10H	2445	2835	3225	3605	3875	4080	4330	4515	4675	4745		
	25	2515	2920	3320	3715	3990	4205	4460	4650	4820	4890		
	30	2445	2835	3225	3605	3875	4080	4330	4515	4675	4745		
	40		2700	3070	3435	3690	3885	4120	4300	4450	4515		
	50		2590	2945	3295	3535	3730	3950	4120	4270	4330		
	65			2805	3135	3370	3550	3765	3925	4065	4125		
	70			2550	2855	3065	3230	3425	3575	3700	3755		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

600/70 R 30 158 D TL TraxionXXL													
EAN		8714692326967				Section width		630 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		1590 mm					
Tyre construction		Radial				Static loaded radius		725 mm					
Recommended rim width		DW20B				Rolling circumference		4750 mm					
Permitted rim width		W/DW18L				SRI		750					
						Tread depth		53 mm					
						75% of the tyre volume		430 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	3030	3440	3860	4275	4695	5030	5320	5635	5875	6075	6325	6375
	10H	2515	2920	3320	3715	3990	4200	4455	4650	4815	4890		
	25	2590	3010	3420	3825	4110	4325	4590	4790	4960	5035		
	30	2515	2920	3320	3715	3990	4200	4455	4650	4815	4890		
	40		2780	3160	3535	3800	3995	4245	4425	4585	4655		
	50		2665	3030	3390	3640	3835	4070	4245	4395	4465		
	65			2885	3230	3470	3650	3875	4045	4185	4250		
	70			2625	2940	3155	3320	3525	3680	3810	3870		

For remarks and the explanation of abbreviations, see inside of the last page.

710/60 R 30 162 D TL TraxionXXL													
EAN		8714692277146				Section width				705 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				1610 mm			
Tyre construction		Radial				Static loaded radius				730 mm			
Recommended rim width		DW23B				Rolling circumference				4800 mm			
Permitted rim width		DW21B, DW25B				SRI				750			
						Tread depth				53 mm			
						75% of the tyre volume				520 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	3255	3695	4145	4585	5040	5390	5690	6035	6295	6590	6880	7125
	10H	2700	3135	3560	3930	4240	4455	4790	5025	5235	5465		
	25	2785	3230	3670	4050	4370	4590	4935	5180	5395	5630		
	30	2700	3135	3560	3930	4240	4455	4790	5025	5235	5465		
	40		2985	3390	3740	4035	4245	4560	4785	4985	5200		
	50		2860	3250	3585	3870	4070	4370	4590	4780	4990		
	65			3095	3415	3685	3875	4165	4370	4555	4750		
	70			2820	3110	3355	3525	3790	3975	4145	4325		

For remarks and the explanation of abbreviations, see inside of the last page.

800/65 R 32 167 A8/B TL TraxionXXL									
EAN		8714692206306			Section width		825 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1840 mm		
Tyre construction		Radial			Static loaded radius		845 mm		
Recommended rim width		DW27B			Rolling circumference		5490 mm		
Permitted rim width		DW25B			SRI		875		
					Tread depth		54 mm		
					75% of the tyre volume		815 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	4455	5050	5670	6270	6890	7370	7775	8255
	10H	3435	3985	4530	4995	5395	5830		
	25	3565	4135	4700	5185	5595	6050		
	30	3435	3985	4530	4995	5395	5830		
	40		3725	4235	4670	5040	5450		
	50		3725	4235	4670	5040	5450		

For remarks and the explanation of abbreviations, see inside of the last page.

600/70 R 34 160 D TL TraxionXXL													
EAN		8714692244643				Section width		610 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		1700 mm					
Tyre construction		Radial				Static loaded radius		775 mm					
Recommended rim width		DW18L				Rolling circumference		5060 mm					
Permitted rim width		W18L, DW20B				SRI		800					
						Tread depth		53 mm					
						75% of the tyre volume		460 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	3205	3635	4080	4515	4960	5315	5620	5955	6205	6420	6680	6750
	10H	2660	3085	3505	3925	4215	4455	4710	4910	5085	5175		
	25	2740	3180	3615	4045	4345	4590	4850	5060	5240	5335		
	30	2660	3085	3505	3925	4215	4455	4710	4910	5085	5175		
	40		2935	3340	3735	4015	4245	4485	4675	4845	4930		
	50		2815	3200	3585	3850	4070	4300	4485	4645	4725		
	65			3050	3410	3665	3875	4095	4270	4425	4500		
	70			2775	3105	3335	3525	3725	3885	4025	4095		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

650/75 R 38 169 D TL TraxionXXL

EAN		8714692206269				Section width		695 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		1935 mm					
Tyre construction		Radial				Static loaded radius		890 mm					
Recommended rim width		DW23B						5775 mm					
Permitted rim width		DW21B, DW20B				SRI		925					
						Tread depth		54 mm					
						75% of the tyre volume		705 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	4050	4600	5165	5715	6275	6720	7110	7535	7850	8125	8455	8700
	10H	3360	3900	4435	4965	5330	5605	5955	6215	6435	6670		
	25	3465	4020	4570	5115	5495	5775	6140	6405	6630	6875		
	30	3360	3900	4435	4965	5330	5605	5955	6215	6435	6670		
	40		3715	4225	4725	5075	5340	5670	5915	6125	6350		
	50		3565	4050	4535	4870	5120	5440	5675	5875	6090		
	65			3860	4315	4635	4875	5180	5405	5595	5800		
	70			3510	3930	4220	4435	4715	4920	5090	5280		

For remarks and the explanation of abbreviations, see inside of the last page.

650/85 R 38 173 D TL TraxionXXL

EAN		8714692206221				Section width				710 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				2070 mm			
Tyre construction		Radial				Static loaded radius				940 mm			
Recommended rim width		DW23B				Rolling circumference				6195 mm			
Permitted rim width		DW21B, DW20B				SRI				975			
						Tread depth				55 mm			
						75% of the tyre volume				850 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	4535	5145	5780	6395	7025	7525	7955	8435	8785	9090	9460	9750
	10H	3765	4365	4965	5555	5970	6265	6665	6955	7200	7475		
	25	3880	4500	5115	5725	6150	6460	6870	7165	7420	7705		
	30	3765	4365	4965	5555	5970	6265	6665	6955	7200	7475		
	40		4160	4730	5290	5680	5970	6350	6625	6860	7120		
	50		3990	4535	5075	5450	5725	6085	6350	6575	6825		
	65			4315	4830	5190	5450	5800	6050	6265	6500		
	70			3930	4395	4720	4960	5275	5505	5700	5915		

For remarks and the explanation of abbreviations, see inside of the last page.

710/70 R 38 166 D TL TraxionXXL

EAN	8714692326974	Section width	730 mm
Nominal tyre pressure	1,6 bar	Overall diameter	1940 mm
Tyre construction	Radial	Static loaded radius	870 mm
Recommended rim width	DW23B	Rolling circumference	5760 mm
Permitted rim width	DW25B	SRI	925
		Tread depth	58 mm
		75% of the tyre volume	755 l

		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	4370	4965	5570	6165	6770	7255	7670	8130
	10H	3630	4210	4785	5355	5755	6095		
	25	3740	4340	4935	5520	5930	6280		
	30	3630	4210	4785	5355	5755	6095		
	40		4010	4560	5100	5480	5805		
	50		3845	4370	4890	5255	5565		
	65			4160	4660	5005	5300		
	70			3790	4240	4555	4825		

For remarks and the explanation of abbreviations, see inside of the last page.

710/70 R 38 171 D TL TraxionXXL

EAN	8714692326981	Section width	730 mm
Nominal tyre pressure	2,4 bar	Overall diameter	1940 mm
Tyre construction	Radial	Static loaded radius	870 mm
Recommended rim width	DW23B	Rolling circumference	5760 mm
Permitted rim width	DW25B	SRI	925
		Tread depth	58 mm
		75% of the tyre volume	755 l

		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10C	4955	5625	6315	6990	7675	8220	8695	9215	9600	9935	10340	10455
	10L	4370	4965	5570	6165	6770	7255	7670	8130	8470	8765	9120	9225
	10H	3630	4210	4785	5355	5755	6095	6430	6705	6945	7070		
	25	3740	4340	4935	5520	5930	6280	6625	6910	7155	7290		
	30	3630	4210	4785	5355	5755	6095	6430	6705	6945	7070		
	40		4010	4560	5100	5480	5805	6120	6385	6610	6735		
	50		3845	4370	4890	5255	5565	5870	6125	6340	6460		
	65			4160	4660	5005	5300	5590	5830	6040	6150		
	70			3790	4240	4555	4825	5085	5305	5495	5595		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

710/75 R 38 174 D TL TraxionXXL

EAN		8714692291487				Section width				715 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				2000 mm			
Tyre construction		Radial				Static loaded radius				910 mm			
Recommended rim width		DW23B				Rolling circumference				5950 mm			
Permitted rim width		DW25B				SRI				975			
						Tread depth				57 mm			
						75% of the tyre volume				815 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10C	5270	5985	6715	7435	8165	8745	9250	9805	10215	10570	11000	11390
	10L	4650	5280	5925	6560	7205	7715	8160	8650	9010	9325	9705	10050
	10H	3860	4480	5095	5700	6120	6440	6840	7135	7390	7705		
	25	3980	4615	5250	5875	6310	6635	7045	7350	7615	7940		
	30	3860	4480	5095	5700	6120	6440	6840	7135	7390	7705		
	40		4265	4850	5425	5830	6130	6510	6795	7035	7335		
	50		4090	4650	5205	5590	5880	6245	6515	6745	7035		
	65			4430	4955	5325	5600	5945	6205	6425	6700		
70			4030	4510	4845	5095	5410	5645	5845	6095			

For remarks and the explanation of abbreviations, see inside of the last page.

800/70 R 38 178 D TL TraxionXXL

EAN				8714692206283				Section width				825 mm			
Nominal tyre pressure				2,4 bar				Overall diameter				2065 mm			
Tyre construction				Radial				Static loaded radius				940 mm			
Recommended rim width				DW25B				Rolling circumference				6160 mm			
Permitted rim width				DW27B				SRI				975			
								Tread depth				58 mm			
								75% of the tyre volume				985 l			
		Tyre pressure (bar)													
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80		
		Load capacity per tyre (kg)													
Speed (km/h)	10C	5975	6780	7615	8425	9255	9915	10485	11110	11575	11980	12465	12750		
	10L	5275	5985	6720	7435	8165	8745	9250	9805	10215	10570	11000	11250		
	10H	4375	5080	5775	6460	6940	7475	7750	8085	8375	8625				
	25	4510	5230	5950	6655	7150	7705	7990	8335	8630	8890				
	30	4375	5080	5775	6460	6940	7475	7750	8085	8375	8625				
	40		4835	5495	6150	6605	7120	7380	7700	7975	8215				
	50		4635	5270	5900	6335	6825	7080	7385	7645	7875				
	65			5020	5615	6035	6500	6740	7030	7280	7500				
	70			4570	5110	5490	5915	6135	6400	6625	6825				

For remarks and the explanation of abbreviations, see inside of the last page.

900/60 R 38 178 D TL TraxionXXL

EAN		8714692309755					Section width				870 mm				
Nominal tyre pressure		2,4 bar					Overall diameter				2040 mm				
Tyre construction		Radial					Static loaded radius				925 mm				
Recommended rim width		DW27B					Rolling circumference				6100 mm				
Permitted rim width		DW28B, DW30B					SRI				975				
							Tread depth				60 mm				
							75% of the tyre volume				1050 l				
		Tyre pressure (bar)													
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80		
		Load capacity per tyre (kg)													
Speed (km/h)	10C	5930	6725	7545	8350	9170	9810	10355	10990	11460	11995	12525	12750		
	10L	5230	5935	6660	7370	8090	8655	9135	9695	10115	10580	11050	11250		
	10H	4340	5035	5720	6310	6810	7245	7690	8070	8415	8625				
	25	4470	5185	5895	6500	7020	7465	7925	8320	8670	8890				
	30	4340	5035	5720	6310	6810	7245	7690	8070	8415	8625				
	40		4795	5445	6010	6485	6900	7325	7685	8010	8250				
	50		4595	5225	5760	6220	6615	7025	7370	7680	7875				
	65			4975	5485	5920	6300	6690	7020	7315	7500				
	70			4525	4995	5390	5735	6085	6390	6655	6825				

For remarks and the explanation of abbreviations, see inside of the last page.

710/70 R 42 173 D TL TraxionXXL

EAN		8714692326998				Section width		730 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		2060 mm					
Tyre construction		Radial				Static loaded radius		940 mm					
Recommended rim width		DW23B				Rolling circumference		6140 mm					
Permitted rim width		DW25B				SRI		975					
						Tread depth		58 mm					
						75% of the tyre volume		825 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10C	5180	5880	6605	7310	8025	8595	9090	9635	10040	10390	10810	11050
	10L	4575	5190	5825	6450	7080	7585	8020	8500	8860	9165	9540	9750
	10H	3795	4405	5005	5600	6015	6440	6720	7015	7260	7475		
	25	3910	4540	5160	5775	6200	6635	6925	7225	7485	7705		
	30	3795	4405	5005	5600	6015	6440	6720	7015	7260	7475		
	40		4195	4765	5335	5730	6130	6400	6680	6915	7120		
	50		4020	4570	5115	5495	5880	6140	6405	6630	6825		
	65			4355	4870	5230	5600	5845	6100	6315	6500		
70			3960	4435	4760	5095	5320	5550	5745	5915			

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

710/75 R 42 175 D TL TraxionXXL

EAN		8714692244520				Section width				735 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				2150 mm			
Tyre construction		Radial				Static loaded radius				980 mm			
Recommended rim width		DW23B				Rolling circumference				6395 mm			
Permitted rim width		DW25B				SRI				1025			
						Tread depth				58 mm			
						75% of the tyre volume				910 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10C	5510	6250	7020	7765	8530	9135	9660	10240	10670	11045	11490	11730
	10L	4860	5515	6190	6855	7525	8060	8525	9035	9415	9745	10140	10350
	10H	4035	4680	5320	5955	6395	6900	7145	7455	7720	7935		
	25	4155	4825	5485	6135	6590	7110	7360	7680	7955	8175		
	30	4035	4680	5320	5955	6395	6900	7145	7455	7720	7935		
	40		4455	5065	5670	6090	6570	6805	7095	7350	7555		
	50		4275	4860	5435	5840	6300	6525	6805	7045	7245		
	65			4625	5180	5560	6000	6215	6480	6710	6900		
	70			4210	4710	5060	5460	5655	5900	6110	6280		

For remarks and the explanation of abbreviations, see inside of the last page.



TRACTOR TYRES - DRIVE RADIAL



TRAXION 65

HIGHEST PRODUCTIVITY FOR MODERN
HIGH-TECH TRACTORS

FEATURES	BENEFITS
Traxion concept with unique tread compound and high rubber content in the center	30% longer lifespan*
Traction zone: transverse and non-parallel lugs on the outside of the tread	Highest traction & excellent self-cleaning on all soil types
Comfort zone: extra-large contact area in the center for continues road contact.	29% lower 'in cabin' noise**

* Compared with premium competitors according to Vredestein R&D test programmes.

** Compared with premium competitors on a ISO certified (ISO10844:2014) RDW test track at 40km/h, according to Vredestein R&D test programmes.



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
16	320/65 R 16	117 D	2,4	W10	320	825	370	2455	36
18	320/65 R 18	119 D	2,4	W9	310	875	390	2605	36
	340/65 R 18	122 D	2,4	W9	320	905	415	2700	37
20	420/65 R 20	135 D	2,4	W13	415	1055	480	3165	37
24	440/65 R 24	128 D	1,6	DW14L	440*	1185*	570*	3600*	38
	480/65 R 24	133 D	1,6	DW15L	480*	1250*	610*	3760*	38
	540/65 R 24	140 D	1,6	DW16L	540*	1315*	620*	3960*	39
28	440/65 R 28	131 D	1,6	DW14L	440*	1285*	615*	3890*	39
	480/65 R 28	136 D	1,6	DW15L	480*	1350*	625*	4020*	40
	540/65 R 28	142 D	1,6	DW16L	540*	1410*	660*	4240*	40
30	540/65 R 30	143 D	1,6	DW16L	540*	1460*	670*	4400*	41
	540/65 R 30	150 D	2,4	DW16L	540*	1460*	670*	4400*	41
34	540/65 R 34	145 D	1,6	DW16L	540*	1580*	745*	4755*	42
	540/65 R 34	152 D	2,4	DW16L	540*	1580*	745*	4755*	42
	600/65 R 34	151 D	1,6	DW18L	590*	1640*	770*	4930*	43
38	540/65 R 38	147 D	1,6	DW16L	540*	1685*	780*	5080*	43
	600/65 R 38	153 D	1,6	DW18L	590*	1750*	810*	5210*	44
	650/65 R 38	157 D	1,6	DW20B	650*	1840*	840*	5475*	44
42	650/65 R 42	158 D	1,6	DW20B	650*	1925*	890*	5740*	45

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values

TRACTOR TYRES - DRIVE RADIAL

320/65 R 16 117 D TL Traxion 65

EAN		8714692344688				Section width				320 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				825 mm			
Tyre construction		Radial				Static loaded radius				370 mm			
Recommended rim width		W10				Rolling circumference				2455 mm			
Permitted rim width		W9, W11				SRI				390			
						Tread depth				31 mm			
						75% of the tyre volume				50 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	805	915	1030	1140	1250	1340	1415	1500	1640	1755	1855	1930
	10H	670	775	885	990	1060	1120	1230	1330	1415	1480		
	25	690	800	910	1020	1095	1155	1265	1375	1460	1525		
	30	670	775	885	990	1060	1120	1230	1330	1415	1480		
	40		740	840	940	1010	1070	1170	1270	1345	1405		
	50		710	805	900	970	1025	1125	1215	1290	1350		
	65			770	860	925	975	1070	1160	1230	1285		
	70			700	780	840	885	975	1055	1120	1170		

For remarks and the explanation of abbreviations, see inside of the last page.

320/65 R 18 119 D TL Traxion 65

EAN		8714692344695					Section width					310 mm		
Nominal tyre pressure		2,4 bar					Overall diameter					875 mm		
Tyre construction		Radial					Static loaded radius					390 mm		
Recommended rim width		W9					Rolling circumference					2605 mm		
Permitted rim width		W10, W11					SRI					425		
							Tread depth					31 mm		
							75% of the tyre volume					53 l		
		Tyre pressure (bar)												
		0,60 0,80 1,00 1,20 1,40 1,60 1,80 2,00 2,20 2,40 2,60 2,80												
		Load capacity per tyre (kg)												
Speed (km/h)	10L	850	965	1085	1200	1320	1410	1490	1580	1725	1850	1955	2040	
	10H	705	820	930	1040	1120	1185	1295	1405	1490	1565			
	25	725	845	960	1075	1155	1220	1335	1450	1535	1610			
	30	705	820	930	1040	1120	1185	1295	1405	1490	1565			
	40		780	885	990	1065	1130	1235	1340	1420	1490			
	50		750	850	950	1020	1080	1185	1285	1360	1430			
	65			810	905	975	1030	1130	1220	1295	1360			
	70			735	825	885	935	1025	1110	1180	1240			

For remarks and the explanation of abbreviations, see inside of the last page.

340/65 R 18 122 D TL Traxion 65

EAN		8714692344732				Section width				320 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				905 mm			
Tyre construction		Radial				Static loaded radius				415 mm			
Recommended rim width		W9				Rolling circumference				2700 mm			
Permitted rim width		W10, W11				SRI				425			
						Tread depth				33 mm			
						75% of the tyre volume				61 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	935	1060	1190	1315	1445	1550	1640	1735	1895	2035	2145	2250
	10H	775	900	1025	1145	1230	1325	1425	1545	1640	1725		
	25	800	925	1055	1180	1265	1365	1470	1590	1690	1780		
	30	775	900	1025	1145	1230	1325	1425	1545	1640	1725		
	40		855	975	1090	1170	1260	1355	1470	1560	1645		
	50		820	935	1045	1120	1210	1300	1410	1495	1575		
	65			890	995	1070	1150	1240	1340	1425	1500		
	70			810	905	975	1045	1125	1220	1295	1365		

For remarks and the explanation of abbreviations, see inside of the last page.

420/65 R 20 135 D TL Traxion 65

EAN		8714692344794				Section width				415 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				1055 mm			
Tyre construction		Radial				Static loaded radius				480 mm			
Recommended rim width		W13				Rolling circumference				3165 mm			
Permitted rim width		W11, W12				SRI				500			
						Tread depth				36 mm			
						75% of the tyre volume				116 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	1360	1545	1735	1920	2105	2255	2385	2530	2760	2960	3125	3270
	10H	1130	1310	1490	1665	1790	1895	2075	2245	2385	2505		
	25	1165	1350	1535	1715	1845	1955	2135	2315	2460	2585		
	30	1130	1310	1490	1665	1790	1895	2075	2245	2385	2505		
	40		1245	1420	1585	1705	1805	1975	2140	2270	2385		
	50		1195	1360	1520	1635	1735	1895	2050	2180	2290		
	65			1295	1450	1555	1650	1805	1955	2075	2180		
	70			1180	1320	1415	1500	1640	1780	1885	1985		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

440/65 R 24 128 D TL Traxion 65

EAN		8714692360466			Section width			440* mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1185* mm	
Tyre construction		Radial			Static loaded radius			555* mm	
Recommended rim width		DW14L			Rolling circumference			3600* mm	
Permitted rim width		W/DW13(L), W14L			SRI			575	
		W/DW15L			Tread depth			37 mm	
EAN Tube		8714692239748			75% of the tyre volume			155 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1505	1705	1915	2120	2325	2490	2625	2785
	10H	1245	1445	1645	1815	1955	2070		
	25	1285	1490	1695	1870	2015	2135		
	30	1245	1445	1645	1815	1955	2070		
	40		1375	1565	1725	1865	1970		
	50		1320	1500	1655	1785	1890		
	65			1430	1575	1700	1800		
	70			1300	1435	1550	1640		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

480/65 R 24 133 D TL Traxion 65

EAN		8714692360473			Section width			480* mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1250* mm	
Tyre construction		Radial			Static loaded radius			585* mm	
Recommended rim width		DW15L			Rolling circumference			3760* mm	
Permitted rim width		W/DW14, W15L			SRI			600	
					Tread depth			41 mm	
EAN Tube		8714692239755			75% of the tyre volume			200 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1720	1950	2190	2425	2660	2850	3005	3190
	10H	1425	1655	1880	2075	2240	2370		
	25	1470	1705	1940	2140	2310	2440		
	30	1425	1655	1880	2075	2240	2370		
	40		1575	1790	1975	2135	2255		
	50		1510	1720	1895	2045	2165		
	65			1635	1805	1950	2060		
	70			1490	1640	1775	1875		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

540/65 R 24 140 D TL Traxion 65

EAN				8714692360480		Section width			540* mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1315* mm								
Tyre construction				Radial		Static loaded radius			615* mm								
Recommended rim width				DW16L		Rolling circumference			3960* mm								
Permitted rim width				W/DW15L, W16L,		SRI			625								
				W/DW18L		Tread depth			47 mm								
				75% of the tyre volume			260 l										
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10L	2070	2350	2635	2915	3200	3425	3615	3835								
	10H	1715	1990	2265	2495	2695	2875										
	25	1770	2050	2330	2575	2775	2965										
	30	1715	1990	2265	2495	2695	2875										
	40		1895	2155	2375	2565	2740										
	50		1820	2065	2280	2460	2625										
	65			1970	2170	2345	2500										
	70			1790	1975	2130	2275										

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

440/65 R 28 131 D TL Traxion 65

EAN				8714692360497		Section width			440* mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1285* mm								
Tyre construction				Radial		Static loaded radius			600* mm								
Recommended rim width				DW14L		Rolling circumference			3890* mm								
Permitted rim width				W13, W14L, W/DW15L		SRI			625								
						Tread depth			38 mm								
						75% of the tyre volume			180 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10L	1615	1830	2055	2275	2500	2675	2820	2995								
	10H	1340	1555	1765	1950	2105	2245										
	25	1380	1600	1820	2005	2165	2310										
	30	1340	1555	1765	1950	2105	2245										
	40		1480	1680	1855	2000	2135										
	50		1420	1615	1780	1920	2050										
	65			1535	1695	1830	1950										
	70			1400	1540	1665	1775										

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

TRACTOR TYRES - DRIVE RADIAL

480/65 R 28 136 D TL Traxion 65

EAN		8714692360503			Section width			480* mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1350* mm	
Tyre construction		Radial			Static loaded radius			635* mm	
Recommended rim width		DW15L			Rolling circumference			4020* mm	
Permitted rim width		W/DW14, W15L			SRI			650	
					Tread depth			41 mm	
EAN Tube		8714692239793			75% of the tyre volume			225 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1845	2095	2350	2600	2855	3055	3225	3420
	10H	1530	1775	2020	2225	2400	2575		
	25	1575	1830	2080	2295	2475	2655		
	30	1530	1775	2020	2225	2400	2575		
	40		1690	1920	2120	2285	2455		
	50		1620	1840	2030	2195	2350		
	65			1755	1935	2090	2240		
	70			1595	1760	1900	2040		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

540/65 R 28 142 D TL Traxion 65

EAN		8714692360510			Section width			540* mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1410* mm	
Tyre construction		Radial			Static loaded radius			660* mm	
Recommended rim width		DW16L			Rolling circumference			4240* mm	
Permitted rim width		W/DW15L#, W16L,			SRI			675	
		W/DW18L			Tread depth			47 mm	
EAN Tube		8714692239809			75% of the tyre volume			285 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2215	2510	2820	3120	3425	3665	3865	4105
	10H	1835	2130	2420	2670	2880	3045		
	25	1890	2195	2495	2750	2970	3140		
	30	1835	2130	2420	2670	2880	3045		
	40		2030	2305	2540	2745	2900		
	50		1945	2210	2440	2630	2785		
	65			2105	2320	2505	2650		
	70			1915	2115	2280	2410		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

540/65 R 30 143 D TL Traxion 65

EAN				8714692360527		Section width			540* mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1460* mm								
Tyre construction				Radial		Static loaded radius			685* mm								
Recommended rim width				DW16L		Rolling circumference			4400* mm								
Permitted rim width				W/DW15L*, W16L,		SRI			700								
				W/DW18L		Tread depth			47 mm								
EAN Tube				8714692331381		75% of the tyre volume			305 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10L	2285	2590	2905	3215	3530	3780	3990	4235								
	10H	1895	2195	2495	2755	2975	3135										
	25	1950	2265	2575	2840	3065	3230										
	30	1895	2195	2495	2755	2975	3135										
	40		2090	2380	2620	2830	2985										
	50		2005	2280	2515	2715	2860										
	65			2170	2395	2585	2725										
	70			1975	2180	2350	2480										

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

540/65 R 30 150 D TL Traxion 65

EAN				8714692360534				Section width				540* mm			
Nominal tyre pressure				2,4 bar				Overall diameter				1460* mm			
Tyre construction				Radial				Static loaded radius				685* mm			
Recommended rim width				DW16L				Rolling circumference				4400* mm			
Permitted rim width				W/DW15L*,W16L,				SRI				700			
				W/DW18L				Tread depth				47 mm			
EAN Tube				8714692331381				75% of the tyre volume				305 l			
		Tyre pressure (bar)													
		0,60 0,80 1,00 1,20 1,40 1,60 1,80 2,00 2,20 2,40 2,60 2,80													
		Load capacity per tyre (kg)													
Speed (km/h)	10L	2285	2590	2905	3215	3530	3780	3990	4235	4415	4620	4825	5025		
	10H	1895	2195	2495	2755	2975	3135	3355	3525	3670	3850				
	25	1950	2265	2575	2840	3065	3230	3460	3630	3785	3970				
	30	1895	2195	2495	2755	2975	3135	3355	3525	3670	3850				
	40		2090	2380	2620	2830	2985	3195	3355	3495	3670				
	50		2005	2280	2515	2715	2860	3065	3215	3355	3520				
	65			2170	2395	2585	2725	2920	3065	3195	3350				
	70			1975	2180	2350	2480	2655	2790	2905	3050				

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

TRACTOR TYRES - DRIVE RADIAL

540/65 R 34 145 D TL Traxion 65

EAN		8714692360541			Section width			540* mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1580* mm	
Tyre construction		Radial			Static loaded radius			740* mm	
Recommended rim width		DW16L			Rolling circumference			4755* mm	
Permitted rim width		W/DW15L*, W16L, W/DW18L			SRI			750	
					Tread depth			47 mm	
					75% of the tyre volume			330 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2420	2745	3080	3410	3745	4005	4225	4485
	10H	2005	2330	2645	2920	3150	3335		
	25	2070	2400	2725	3010	3245	3435		
	30	2005	2330	2645	2920	3150	3335		
	40		2220	2520	2780	3000	3175		
	50		2125	2415	2665	2875	3045		
	65			2300	2540	2740	2900		
	70			2095	2310	2495	2640		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

540/65 R 34 152 D TL Traxion 65

EAN		8714692360558					Section width				540* mm			
Nominal tyre pressure		2,4 bar					Overall diameter				1580* mm			
Tyre construction		Radial					Static loaded radius				740* mm			
Recommended rim width		DW16L					Rolling circumference				4755* mm			
Permitted rim width		W/DW15L*, W16L,					SRI				750			
		W/DW18L					Tread depth				47 mm			
							75% of the tyre volume				330 l			
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre (kg)												
Speed (km/h)	10L	2420	2745	3080	3410	3745	4005	4225	4485	4680	4895	5115	5325	
	10H	2005	2330	2645	2920	3150	3335	3560	3735	3890	4080			
	25	2070	2400	2725	3010	3245	3435	3665	3850	4010	4205			
	30	2005	2330	2645	2920	3150	3335	3560	3735	3890	4080			
	40		2220	2520	2780	3000	3175	3390	3555	3705	3885			
	50		2125	2415	2665	2875	3045	3250	3410	3555	3730			
	65			2300	2540	2740	2900	3095	3250	3385	3550			
	70			2095	2310	2495	2640	2815	2955	3080	3230			

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

600/65 R 34 151 D TL Traxion 65

EAN				8714692360565		Section width			590* mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1640* mm								
Tyre construction				Radial		Static loaded radius			770* mm								
Recommended rim width				DW18L		Rolling circumference			4930* mm								
Permitted rim width				W18L, DW20B		SRI			775								
						Tread depth			51 mm								
EAN Tube				8714692331411		75% of the tyre volume			425 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10L	2845	3225	3620	4005	4400	4710	4970	5275								
	10H	2360	2735	3110	3430	3705	3965										
	25	2430	2820	3205	3535	3815	4090										
	30	2360	2735	3110	3430	3705	3965										
	40		2605	2960	3265	3525	3780										
	50		2500	2840	3135	3380	3625										
	65			2705	2985	3220	3450										
	70			2460	2715	2930	3140										

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

540/65 R 38 147 D TL Traxion 65

EAN		8714692360572			Section width			540* mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1685* mm	
Tyre construction		Radial			Static loaded radius			790* mm	
Recommended rim width		DW16L			Rolling circumference			5080* mm	
Permitted rim width		W16L, W/DW18L			SRI			800	
					Tread depth			47 mm	
EAN Tube		8714692331459			75% of the tyre volume			355 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2555	2895	3250	3595	3950	4225	4460	4735
	10H	2120	2455	2790	3080	3325	3535		
	25	2180	2530	2875	3175	3425	3645		
	30	2120	2455	2790	3080	3325	3535		
	40		2340	2660	2935	3165	3365		
	50		2245	2550	2810	3035	3230		
	65			2430	2680	2890	3075		
	70			2210	2435	2630	2800		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

TRACTOR TYRES - DRIVE RADIAL

600/65 R 38 153 D TL Traxion 65

EAN		8714692360589		Section width		590* mm			
Nominal tyre pressure		1,6 bar		Overall diameter		1750* mm			
Tyre construction		Radial		Static loaded radius		820* mm			
Recommended rim width		DW18L		Rolling circumference		5210* mm			
Permitted rim width		W18L, DW20B		SRI		825			
				Tread depth		50 mm			
EAN Tube		8714692331466		75% of the tyre volume		465 l			
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2995	3400	3815	4220	4635	4960	5235	5555
	10H	2485	2885	3275	3615	3900	4200		
	25	2560	2970	3375	3725	4020	4325		
	30	2485	2885	3275	3615	3900	4200		
	40		2745	3120	3440	3715	3995		
	50		2635	2990	3300	3560	3835		
	65			2850	3145	3390	3650		
	70			2595	2860	3085	3320		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

650/65 R 38 157 D TL Traxion 65

EAN		8714692360596			Section width			650* mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1840* mm	
Tyre construction		Radial			Static loaded radius			865* mm	
Recommended rim width		DW20B			Rolling circumference			5475* mm	
Permitted rim width		W/DW18L#			SRI			875	
					Tread depth			56 mm	
EAN Tube		8714692331466			75% of the tyre volume			575 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	3385	3840	4310	4770	5240	5605	5915	6280
	10H	2810	3260	3705	4085	4410	4745		
	25	2895	3360	3815	4210	4545	4890		
	30	2810	3260	3705	4085	4410	4745		
	40		3105	3525	3890	4200	4515		
	50		2975	3380	3730	4025	4330		
	65			3220	3550	3835	4125		
	70			2930	3235	3490	3755		

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

650/65 R 42 158 D TL Traxion 65

EAN				8714692360602		Section width			650* mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1925* mm								
Tyre construction				Radial		Static loaded radius			900* mm								
Recommended rim width				DW20B		Rolling circumference			5740* mm								
Permitted rim width				W/DW18L#		SRI			925								
						Tread depth			53 mm								
						75% of the tyre volume			620 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10L	3550	4025	4520	5000	5490	5875	6200	6580								
	10H	2945	3415	3885	4280	4620	4890										
	25	3035	3520	4000	4415	4765	5035										
	30	2945	3415	3885	4280	4620	4890										
	40		3255	3695	4075	4400	4655										
	50		3120	3545	3910	4220	4465										
	65			3375	3725	4020	4250										
	70			3070	3390	3655	3870										

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

TRACTOR DRIVE RADIAL



TRAXION +

HIGHEST PRODUCTIVITY FOR MODERN
HIGH-TECH TRACTORS

FEATURES	BENEFITS
Extra-large contact area in the centre	Longest lifespan
Widely spaced cleats in the shoulder	Excellent self-cleaning, highest traction
Genuine tread width	Large footprint, maximum traction

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm
24	440/65 R 24	128 D	1,6	DW14L	440	1185	570	3600
	480/65 R 24	133 D	1,6	DW15L	490	1250	610	3760
	540/65 R 24	140 D	1,6	DW16L	540	1315	620	3960
28	440/65 R 28	131 D	1,6	DW14L	440	1285	615	3890
	480/65 R 28	136 D	1,6	DW15L	490	1350	625	4020
	540/65 R 28	142 D	1,6	DW16L	540	1410	660	4240
30	540/65 R 30	143 D	1,6	DW16L	540	1460	670	4400
	540/65 R 30	150 D	2,4	DW16L	540	1460	670	4400
34	540/65 R 34	145 D	1,6	DW16L	540	1580	745	4755
	540/65 R 34	152 D	2,4	DW16L	540	1580	745	4755
	600/65 R 34	151 D	1,6	DW18L	610	1640	770	4930
38	540/65 R 38	147 D	1,6	DW16L	540	1685	780	5080
	600/65 R 38	153 D	1,6	DW18L	610	1750	810	5210
	650/65 R 38	157 D	1,6	DW20B	660	1835	840	5450
42	650/65 R 42	158 D	1,6	DW20B	660	1935	890	5775

TRAXION+ 65 SERIES



TRACTOR TYRES - DRIVE RADIAL



TRAXION +

HIGHEST PRODUCTIVITY FOR MODERN
HIGH-TECH TRACTORS

FEATURES	BENEFITS
Extra-large contact area in the centre	Longest lifespan
Widely spaced cleats in the shoulder	Excellent self-cleaning, highest traction
Genuine tread width	Large footprint, maximum traction



TRAXION+ 70-SERIES

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
16	240/70 R 16	104 D	2,4	W8	245	735	335	2190	50
	260/70 R 16	109 D	2,4	W8	260	765	345	2280	50
	280/70 R 16	112 D	2,4	W9	280	800	365	2390	51
18	280/70 R 18	114 D	2,4	W9	275	850	385	2540	51
20	260/70 R 20	113 D	2,4	W8	265	880	390	2620	52
	280/70 R 20	116 D	2,4	W9	280	910	415	2715	52
	300/70 R 20	120 D	2,4	W9	295	945	439	2815	53
	320/70 R 20	123 D	2,4	W10	320	985	450	2935	53
	360/70 R 20	129 D	2,4	W11	360	1045	479	3115	54
	380/70 R 20	132 D	2,4	W12	390	1070	490	3190	54
24	320/70 R 24	116 D	1,6	W10	320	1095	520	3280	55
	360/70 R 24	122 D	1,6	W11	360	1150	545	3445	55
	380/70 R 24	125 D	1,6	W12	390	1190	565	3570	56
	420/70 R 24	130 D	1,6	W13	430	1245	595	3755	56
	480/70 R 24	138 D	1,6	DW15L	495	1315	620	3950	57
28	380/70 R 28	127 D	1,6	W12	390	1295	620	3895	57
	420/70 R 28	133 D	1,6	W13	430	1350	640	4055	58
	480/70 R 28	140 D	1,6	DW15L	495	1415	655	4240	58
30	480/70 R 30	141 D	1,6	DW15L	495	1475	695	4440	59
34	480/70 R 34	143 D	1,6	DW15L	495	1575	750	4765	59
	520/70 R 34	148 D	1,6	DW16L	540	1640	770	4950	60
38	480/70 R 38	145 D	1,6	DW15L	495	1680	795	5025	60
	520/70 R 38	150 D	1,6	DW16L	540	1750	815	5275	61
	580/70 R 38	155 D	1,6	DW18L	600	1830	840	5515	61
42	620/70 R 42	166 D	2,4	DW20B	625	1930	880	5780	62

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

240/70 R 16 104 D TL Traxion 70

EAN		8714692344602				Section width				245 mm															
Nominal tyre pressure		2,4 bar				Overall diameter				735 mm															
Tyre construction		Radial				Static loaded radius				335 mm															
Recommended rim width		W8				Rolling circumference				2190 mm															
Permitted rim width		W8L, W9				SRI				350															
						Tread depth				29 mm															
						75% of the tyre volume				26 l															
		Tyre pressure (bar)																							
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00		2,20		2,40		2,60		2,80	
		Load capacity per tyre (kg)																							
Speed (km/h)	10L	550	625	705	780	855	915	970	1025	1120	1200	1270	1350												
	10H	460	530	605	675	725	770	840	910	970	1035														
	25	470	550	625	695	750	795	870	940	1000	1065														
	30	460	530	605	675	725	770	840	910	970	1035														
	40		505	575	645	690	735	800	870	920	985														
	50		485	550	620	665	705	770	835	885	945														
	65			525	590	630	670	730	795	840	900														
	70			480	535	575	610	665	720	765	820														

For remarks and the explanation of abbreviations, see inside of the last page.

260/70 R 16 109 D TL Traxion 70

EAN		8714692344619				Section width				260 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				765 mm			
Tyre construction		Radial				Static loaded radius				345 mm			
Recommended rim width		W8				Rolling circumference				2280 mm			
Permitted rim width		W8L, W9				SRI				370			
						Tread depth				31 mm			
						75% of the tyre volume				31 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	630	715	805	890	980	1050	1110	1175	1285	1375	1450	1545
	10H	525	610	690	775	830	890	965	1045	1110	1185		
	25	540	625	715	800	855	920	995	1075	1140	1220		
	30	525	610	690	775	830	890	965	1045	1110	1185		
	40		580	660	735	790	850	915	995	1055	1130		
	50		555	630	705	760	815	880	955	1010	1080		
	65			600	675	725	775	840	905	965	1030		
	70			545	610	660	705	760	825	875	935		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION+ 70-SERIES

280/70 R 16 112 D TL Traxion 70

EAN		8714692344633					Section width					280 mm		
Nominal tyre pressure		2,4 bar					Overall diameter					800 mm		
Tyre construction		Radial					Static loaded radius					365 mm		
Recommended rim width		W9					Rolling circumference					2390 mm		
Permitted rim width		W8, W8L, W10					SRI					390		
							Tread depth					33 mm		
							75% of the tyre volume					39 l		
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre (kg)												
Speed (km/h)	10L	700	795	890	985	1085	1160	1230	1300	1420	1525	1610	1680	
	10H	580	675	765	860	920	975	1065	1155	1225	1290			
	25	600	695	790	885	950	1005	1100	1190	1265	1325			
	30	580	675	765	860	920	975	1065	1155	1225	1290			
	40		640	730	815	875	930	1015	1100	1170	1225			
	50		615	700	785	840	895	975	1055	1120	1175			
	65			665	745	800	850	930	1005	1065	1120			
	70			605	680	730	775	845	915	970	1020			

For remarks and the explanation of abbreviations, see inside of the last page.

280/70 R 18 114 D TL Traxion 70

EAN		8714692344640				Section width		275 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		850 mm					
Tyre construction		Radial				Static loaded radius		385 mm					
Recommended rim width		W9				Rolling circumference		2540 mm					
Permitted rim width		W8, W8L, W10				SRI		410					
						Tread depth		33 mm					
						75% of the tyre volume		42 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	740	840	940	1040	1145	1225	1295	1375	1500	1610	1695	1770
	10H	615	710	810	905	970	1035	1125	1220	1295	1355		
	25	630	735	835	935	1000	1065	1160	1260	1335	1400		
	30	615	710	810	905	970	1035	1125	1220	1295	1355		
	40		680	770	860	925	985	1075	1160	1235	1290		
	50		650	740	825	890	945	1030	1115	1185	1240		
	65			705	785	845	900	980	1060	1125	1180		
	70			640	715	770	820	890	965	1025	1075		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

260/70 R 20 113 D TL Traxion 70

EAN		8714692344626				Section width				265 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				880 mm			
Tyre construction		Radial				Static loaded radius				390 mm			
Recommended rim width		W8				Rolling circumference				2620 mm			
Permitted rim width		W9				SRI				425			
						Tread depth				31 mm			
						75% of the tyre volume				38 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	705	800	900	995	1095	1170	1240	1315	1435	1540	1620	1725
	10H	585	680	775	865	930	975	1075	1165	1240	1325		
	25	605	700	795	890	960	1005	1110	1200	1275	1365		
	30	585	680	775	865	930	975	1075	1165	1240	1325		
	40		650	735	825	885	930	1025	1110	1180	1260		
	50		620	705	790	850	895	985	1065	1130	1210		
	65			675	755	810	850	935	1015	1075	1150		
	70			610	685	735	775	850	925	980	1045		

For remarks and the explanation of abbreviations, see inside of the last page.

280/70 R 20 116 D TL Traxion 70

EAN		8714692344657				Section width				280 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				910 mm			
Tyre construction		Radial				Static loaded radius				415 mm			
Recommended rim width		W9				Rolling circumference				2715 mm			
Permitted rim width		W10				SRI				450			
						Tread depth				33 mm			
						75% of the tyre volume				46 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	775	880	990	1095	1205	1290	1365	1445	1575	1690	1785	1875
	10H	645	750	850	950	1020	1095	1185	1285	1360	1440		
	25	665	770	875	980	1055	1125	1220	1320	1405	1480		
	30	645	750	850	950	1020	1095	1185	1285	1360	1440		
	40		710	810	905	975	1040	1130	1220	1295	1370		
	50		685	775	870	935	1000	1080	1170	1245	1315		
	65			740	830	890	950	1030	1115	1185	1250		
	70			675	755	810	865	935	1015	1080	1140		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION+ 70-SERIES

300/70 R 20 120 D TL Traxion 70

EAN				8714692344671				Section width				295 mm			
Nominal tyre pressure				2,4 bar				Overall diameter				945 mm			
Tyre construction				Radial				Static loaded radius				439 mm			
Recommended rim width				W9				Rolling circumference				2815 mm			
Permitted rim width				W10				SRI				450			
								Tread depth				36 mm			
								75% of the tyre volume				55 l			
		Tyre pressure (bar)													
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80		
		Load capacity per tyre (kg)													
Speed (km/h)	10L	865	980	1100	1215	1335	1430	1515	1605	1750	1880	1980	2100		
	10H	715	830	945	1055	1135	1220	1315	1425	1515	1610				
	25	740	855	975	1090	1170	1255	1355	1470	1560	1660				
	30	715	830	945	1055	1135	1220	1315	1425	1515	1610				
	40		790	900	1005	1080	1160	1255	1355	1440	1535				
	50		760	865	965	1035	1115	1200	1300	1380	1470				
	65			820	920	985	1060	1145	1240	1315	1400				
70			750	835	900	965	1040	1130	1195	1275					

For remarks and the explanation of abbreviations, see inside of the last page.

320/70 R 20 123 D TL Traxion 70

EAN			8714692344701			Section width			320 mm				
Nominal tyre pressure			2,4 bar			Overall diameter			985 mm				
Tyre construction			Radial			Static loaded radius			450 mm				
Recommended rim width			W10			Rolling circumference			2935 mm				
Permitted rim width			W9, W11			SRI			475				
						Tread depth			36 mm				
						75% of the tyre volume			69 l				
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	955	1080	1215	1345	1475	1580	1670	1770	1935	2075	2190	2325
	10H	790	915	1045	1165	1255	1325	1450	1575	1670	1780		
	25	815	945	1075	1205	1290	1365	1495	1620	1720	1835		
	30	790	915	1045	1165	1255	1325	1450	1575	1670	1780		
	40		875	995	1110	1195	1260	1385	1500	1590	1695		
	50		840	950	1065	1145	1210	1325	1435	1525	1630		
	65			905	1015	1090	1150	1265	1370	1450	1550		
	70			825	925	990	1045	1150	1245	1320	1410		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

360/70 R 20 129 D TL Traxion 70

EAN		8714692344756					Section width				360 mm			
Nominal tyre pressure		2,4 bar					Overall diameter				1045 mm			
Tyre construction		Radial					Static loaded radius				479 mm			
Recommended rim width		W11					Rolling circumference				3115 mm			
Permitted rim width		W10, W12					SRI				500			
							Tread depth				38 mm			
							75% of the tyre volume				95 l			
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre (kg)												
Speed (km/h)	10L	1145	1295	1455	1610	1770	1895	2005	2125	2320	2490	2625	2775	
	10H	950	1100	1250	1400	1505	1610	1740	1890	2005	2130			
	25	975	1135	1290	1445	1550	1660	1795	1945	2065	2190			
	30	950	1100	1250	1400	1505	1610	1740	1890	2005	2130			
	40		1050	1190	1335	1430	1535	1660	1795	1910	2025			
	50		1005	1140	1280	1375	1470	1590	1725	1830	1945			
	65			1090	1215	1310	1400	1515	1640	1740	1850			
	70			990	1110	1190	1275	1380	1495	1585	1685			

For remarks and the explanation of abbreviations, see inside of the last page.

380/70 R 20 132 D TL Traxion 70

EAN		8714692344763				Section width				390 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				1070 mm			
Tyre construction		Radial				Static loaded radius				490 mm			
Recommended rim width		W12				Rolling circumference				3190 mm			
Permitted rim width		W11, W13				SRI				525			
						Tread depth				40 mm			
						75% of the tyre volume				108 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	1245	1410	1585	1755	1925	2060	2180	2310	2525	2705	2855	3000
	10H	1030	1195	1360	1525	1635	1725	1895	2055	2180	2300		
	25	1065	1235	1405	1570	1685	1780	1955	2115	2245	2370		
	30	1030	1195	1360	1525	1635	1725	1895	2055	2180	2300		
	40		1140	1295	1450	1560	1645	1805	1955	2075	2190		
	50		1095	1245	1390	1495	1575	1730	1875	1990	2100		
	65			1185	1325	1425	1500	1650	1785	1895	2000		
	70			1075	1205	1295	1365	1500	1625	1725	1820		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION+ 70-SERIES

320/70 R 24 116 D TL Traxion+									
EAN		8714692276712			Section width		320 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1095 mm		
Tyre construction		Radial			Static loaded radius		520 mm		
Recommended rim width		W10			Rolling circumference		3280 mm		
Permitted rim width		W9, W11			SRI		525		
					Tread depth		36 mm		
					75% of the tyre volume		85 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1040	1180	1325	1465	1610	1725	1820	1930
	10H	860	1000	1135	1275	1365	1440		
	25	890	1030	1170	1310	1410	1480		
	30	860	1000	1135	1275	1365	1440		
	40		955	1085	1210	1300	1370		
	50		915	1040	1160	1250	1315		
	65			990	1105	1190	1250		
	70			900	1005	1080	1140		

For remarks and the explanation of abbreviations, see inside of the last page.

360/70 R 24 122 D TL Traxion+									
EAN		8714692276743			Section width		360 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1150 mm		
Tyre construction		Radial			Static loaded radius		545 mm		
Recommended rim width		W11			Rolling circumference		3445 mm		
Permitted rim width		W10, W12			SRI		550		
					Tread depth		37 mm		
					75% of the tyre volume		115 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1245	1410	1585	1750	1925	2060	2180	2310
	10H	1030	1195	1360	1520	1635	1725		
	25	1060	1235	1400	1570	1685	1780		
	30	1030	1195	1360	1520	1635	1725		
	40		1140	1295	1450	1555	1645		
	50		1095	1240	1390	1495	1575		
	65			1185	1325	1420	1500		
	70			1075	1205	1295	1365		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

380/70 R 24 125 D TL Traxion+

EAN		8714692276750			Section width			390 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1190 mm	
Tyre construction		Radial			Static loaded radius			565 mm	
Recommended rim width		W12			Rolling circumference			3570 mm	
Permitted rim width		W11, W12L, W/DW13(L)			SRI			575	
					Tread depth			38 mm	
EAN Tube		8714692239748			75% of the tyre volume			140 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1350	1530	1720	1905	2090	2240	2370	2510
	10H	1120	1300	1480	1655	1775	1895		
	25	1155	1340	1525	1705	1830	1955		
	30	1120	1300	1480	1655	1775	1895		
	40		1240	1405	1575	1690	1805		
	50		1185	1350	1510	1620	1735		
	65			1285	1440	1545	1650		
	70			1170	1310	1405	1500		

For remarks and the explanation of abbreviations, see inside of the last page.

420/70 R 24 130 D TL Traxion+

EAN		8714692276774			Section width			430 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1245 mm	
Tyre construction		Radial			Static loaded radius			595 mm	
Recommended rim width		W13			Rolling circumference			3755 mm	
Permitted rim width		W12(L), DW13(L), W/DW14L			SRI			600	
EAN Tube		8714692239755			Tread depth			42 mm	
					75% of the tyre volume			175 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1575	1790	2005	2220	2440	2615	2765	2930
	10H	1305	1515	1725	1930	2075	2185		
	25	1345	1565	1775	1990	2135	2250		
	30	1305	1515	1725	1930	2075	2185		
	40		1445	1640	1840	1975	2080		
	50		1385	1575	1760	1895	1995		
	65			1500	1680	1800	1900		
	70			1365	1525	1640	1730		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION+ 70-SERIES

480/70 R 24 138 D TL Traxion+									
EAN		8714692276798			Section width		495 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1315 mm		
Tyre construction		Radial			Static loaded radius		620 mm		
Recommended rim width		DW15L			Rolling circumference		3950 mm		
Permitted rim width		W/DW14L, W15L, W/DW16L			SRI		625		
					Tread depth		48 mm		
					75% of the tyre volume		240 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1940	2200	2470	2735	3005	3220	3405	3605
	10H	1610	1870	2125	2375	2555	2715		
	25	1660	1925	2190	2450	2630	2795		
	30	1610	1870	2125	2375	2555	2715		
	40		1780	2020	2265	2430	2585		
	50		1705	1940	2170	2330	2480		
	65			1845	2065	2220	2360		
	70			1680	1880	2020	2150		

For remarks and the explanation of abbreviations, see inside of the last page.

380/70 R 28 127 D TL Traxion+									
EAN			8714692276811			Section width		390 mm	
Nominal tyre pressure			1,6 bar			Overall diameter		1295 mm	
Tyre construction			Radial			Static loaded radius		620 mm	
Recommended rim width			W12			Rolling circumference		3895 mm	
Permitted rim width			W11, W12L, W13			SRI		625	
						Tread depth		38 mm	
EAN Tube			8714692239786			75% of the tyre volume		155 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1450	1650	1850	2050	2250	2410	2550	2700
	10H	1205	1400	1590	1780	1910	2010		
	25	1240	1440	1640	1835	1970	2075		
	30	1205	1400	1590	1780	1910	2010		
	40		1330	1515	1695	1820	1915		
	50		1275	1450	1625	1745	1840		
	65			1385	1545	1660	1750		
	70			1260	1410	1510	1595		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

420/70 R 28 133 D TL Traxion+									
EAN		8714692276835			Section width		430 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1350 mm		
Tyre construction		Radial			Static loaded radius		640 mm		
Recommended rim width		W13			Rolling circumference		4055 mm		
Permitted rim width		W12(L), W/DW14L			SRI		650		
					Tread depth		42 mm		
EAN Tube		8714692239793			75% of the tyre volume		195 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1690	1920	2155	2385	2620	2805	2965	3145
	10H	1405	1630	1850	2070	2225	2370		
	25	1445	1680	1910	2135	2295	2440		
	30	1405	1630	1850	2070	2225	2370		
	40		1550	1765	1975	2120	2255		
	50		1485	1690	1890	2030	2165		
	65			1610	1800	1935	2060		
	70			1465	1640	1760	1875		

For remarks and the explanation of abbreviations, see inside of the last page.

480/70 R 28 140 D TL Traxion+									
EAN			8714692276859			Section width			495 mm
Nominal tyre pressure			1,6 bar			Overall diameter			1415 mm
Tyre construction			Radial			Static loaded radius			655 mm
Recommended rim width			DW15L			Rolling circumference			4240 mm
Permitted rim width			W/DW14L, W15L,			SRI			675
			W/DW16L			Tread depth			48 mm
EAN Tube			8714692239809			75% of the tyre volume			255 l
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2075	2355	2645	2930	3215	3445	3645	3860
	10H	1725	2000	2275	2545	2735	2875		
	25	1775	2060	2345	2620	2815	2965		
	30	1725	2000	2275	2545	2735	2875		
	40		1905	2165	2425	2600	2740		
	50		1825	2075	2325	2495	2625		
	65			1975	2210	2375	2500		
	70			1800	2015	2160	2275		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION+ 70-SERIES

480/70 R 30 141 D TL Traxion+

EAN		8714692276873		Section width		495 mm			
Nominal tyre pressure		1,6 bar		Overall diameter		1475 mm			
Tyre construction		Radial		Static loaded radius		695 mm			
Recommended rim width		DW15L		Rolling circumference		4440 mm			
Permitted rim width		W/DW14L, W15L,		SRI		700			
		W/DW16L		Tread depth		48 mm			
EAN Tube		8714692331381		75% of the tyre volume		270 l			
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2145	2435	2730	3020	3320	3555	3760	3985
	10H	1780	2065	2345	2625	2820	2960		
	25	1835	2125	2420	2705	2905	3050		
	30	1780	2065	2345	2625	2820	2960		
	40		1965	2235	2500	2685	2820		
	50		1885	2145	2400	2575	2705		
	65			2040	2285	2450	2575		
	70			1855	2080	2230	2345		

For remarks and the explanation of abbreviations, see inside of the last page.

480/70 R 34 143 D TL Traxion+

EAN			8714692276897			Section width			495 mm								
Nominal tyre pressure			1,6 bar			Overall diameter			1575 mm								
Tyre construction			Radial			Static loaded radius			750 mm								
Recommended rim width			DW15L			Rolling circumference			4765 mm								
Permitted rim width			W/DW14L, W15L, W/DW16L			SRI			750								
						Tread depth			48 mm								
						75% of the tyre volume			295 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10L	2275	2580	2895	3205	3520	3770	3990	4230								
	10H	1885	2190	2490	2785	2990	3135										
	25	1945	2255	2565	2870	3085	3230										
	30	1885	2190	2490	2785	2990	3135										
	40		2085	2370	2650	2850	2985										
	50		2000	2275	2545	2730	2860										
	65			2165	2420	2600	2725										
	70			1970	2205	2365	2480										

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

520/70 R 34 148 D TL Traxion+									
EAN		8714692276910			Section width		540 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1640 mm		
Tyre construction		Radial			Static loaded radius		770 mm		
Recommended rim width		DW16L			Rolling circumference		4950 mm		
Permitted rim width		W/DW15L, W16L, W/DW18L			SRI		775		
					Tread depth		52 mm		
EAN Tube		8714692331411			75% of the tyre volume		360 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2570	2915	3275	3625	3980	4260	4505	4775
	10H	2130	2475	2810	3145	3380	3620		
	25	2195	2550	2900	3245	3485	3735		
	30	2130	2475	2810	3145	3380	3620		
	40		2355	2680	2995	3220	3450		
	50		2260	2570	2875	3085	3310		
	65			2445	2735	2940	3150		
	70			2225	2490	2675	2865		

For remarks and the explanation of abbreviations, see inside of the last page.

480/70 R 38 145 D TL Traxion+									
EAN			8714692276934			Section width			495 mm
Nominal tyre pressure			1,6 bar			Overall diameter			1680 mm
Tyre construction			Radial			Static loaded radius			795 mm
Recommended rim width			DW15L			Rolling circumference			5025 mm
Permitted rim width			W/DW14L, W15L,			SRI			800
			W/DW16L			Tread depth			48 mm
EAN Tube			8714692331459			75% of the tyre volume			320 l
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2400	2725	3060	3385	3720	3980	4210	4465
	10H	1990	2310	2630	2940	3160	3335		
	25	2050	2380	2710	3030	3255	3435		
	30	1990	2310	2630	2940	3160	3335		
	40		2200	2500	2800	3005	3175		
	50		2110	2400	2685	2885	3045		
	65			2285	2555	2745	2900		
	70			2080	2325	2500	2640		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION+ 70-SERIES

520/70 R 38 150 D TL Traxion+

EAN	8714692276958	Section width	540 mm
Nominal tyre pressure	1,6 bar	Overall diameter	1750 mm
Tyre construction	Radial	Static loaded radius	815 mm
Recommended rim width	DW16L	Rolling circumference	5275 mm
Permitted rim width	W/DW15L, W16L, W/DW18L	SRI	825
EAN Tube	8714692331466	Tread depth	52 mm
		75% of the tyre volume	405 l

		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2750	3120	3500	3875	4255	4560	4820	5110
	10H	2280	2645	3010	3365	3615	3850		
	25	2350	2725	3100	3470	3725	3970		
	30	2280	2645	3010	3365	3615	3850		
	40		2520	2865	3205	3445	3670		
	50		2415	2745	3075	3300	3520		
	65			2615	2930	3145	3350		
	70			2380	2665	2860	3050		

For remarks and the explanation of abbreviations, see inside of the last page.

580/70 R 38 155 D TL Traxion+

EAN	8714692276972	Section width	600 mm
Nominal tyre pressure	1,6 bar	Overall diameter	1830 mm
Tyre construction	Radial	Static loaded radius	840 mm
Recommended rim width	DW18L	Rolling circumference	5515 mm
Permitted rim width	W18L	SRI	875
EAN Tube	8714692331473	Tread depth	55 mm
		75% of the tyre volume	525 l

		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	3200	3630	4075	4510	4955	5305	5610	5950
	10H	2655	3080	3500	3920	4210	4455		
	25	2735	3175	3610	4040	4340	4590		
	30	2655	3080	3500	3920	4210	4455		
	40		2935	3335	3730	4010	4245		
	50		2815	3200	3580	3845	4070		
	65			3045	3410	3660	3875		
	70			2770	3100	3330	3525		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

620/70 R 42 166 D TL Traxion+													
EAN		8714692276996				Section width		625 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		1930 mm					
Tyre construction		Radial				Static loaded radius		880 mm					
Recommended rim width		DW20B				Rolling circumference		5780 mm					
Permitted rim width		W18L, DW18L				SRI		925					
						Tread depth		54 mm					
						75% of the tyre volume		585 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	3715	4215	4730	5235	5750	6160	6515	6905	7195	7445	7745	7950
	10H	3080	3575	4065	4550	4885	5175	5460	5695	5895	6095		
	25	3175	3685	4190	4690	5035	5335	5625	5870	6075	6280		
	30	3080	3575	4065	4550	4885	5175	5460	5695	5895	6095		
	40		3405	3870	4330	4655	4930	5200	5425	5615	5805		
	50		3265	3710	4155	4460	4725	4985	5200	5385	5565		
	65			3535	3955	4250	4500	4745	4950	5130	5300		
	70			3215	3600	3865	4095	4320	4505	4665	4825		

For remarks and the explanation of abbreviations, see inside of the last page.



TRAXION+ 70-SERIES



TRACTOR TYRES - DRIVE RADIAL



TRAXION 85

THE STANDARD FOR MEDIUM
CLASS TRACTORS

FEATURES	BENEFITS
Non-parallel cleats	Excellent self-cleaning and improved traction
Reinforced bead design	Optimal stability at high speeds
Distinctive curved cleats	Improved ride and long lifespan



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
24	280/85 R 24	115 A8/B	1,6	W10	295	1090	520	3275	66
	280/85 R 24	130 A8/B	4	W10	295	1095	515	3320	66
	320/85 R 24	122 A8/B	1,6	W11	335	1145	540	3430	67
	340/85 R 24	125 A8/B	1,6	W12	360	1190	550	3535	67
	380/85 R 24	131 A8/B	1,6	W13	400	1240	580	3710	68
	420/85 R 24	137 A8/B	1,6	DW15L	450	1320	620	3925	68
28	280/85 R 28	118 A8/B	1,6	W10	285	1195	545	3570	69
	320/85 R 28	124 A8/B	1,6	W11	335	1250	585	3725	69
	340/85 R 28	127 A8/B	1,6	W12	360	1290	610	3870	70
	380/85 R 28	133 A8/B	1,6	W13	400	1345	630	3985	70
	420/85 R 28	139 A8/B	1,6	DW15L	455	1415	660	4215	71
30	380/85 R 30	135 A8/B	1,6	W12	390	1410	645	4150	71
	420/85 R 30	140 A8/B	1,6	DW15L	455	1470	685	4425	72
	460/85 R 30	145 A8/B	1,6	DW15L	490	1545	725	4605	72
34	380/85 R 34	137 A8/B	1,6	W12	390	1505	680	4470	73
	420/85 R 34	142 A8/B	1,6	DW15L	455	1570	735	4700	73
	460/85 R 34	147 A8/B	1,6	DW16L	490	1640	765	4915	74
38	340/85 R 38	133 A8/B	1,6	W12	360	1550	730	4680	74
	380/80 R 38	142 A8/B	2,4	W12	390	1580	735	4820	75
	420/85 R 38	144 A8/B	1,6	DW15L	455	1670	780	5035	75
	460/85 R 38	149 A8/B	1,6	DW16L	490	1750	815	5205	76
	520/85 R 38	155 A8/B	1,6	DW18L	555	1830	850	5465	76
42	480/80 R 42	156 A8/B	2,4	DW16L	500	1850	855	5600	77
	520/85 R 42	157 A8/B	1,6	DW18L	555	1930	905	5785	77
46	480/80 R 46	158 A8/B	2,4	DW16L	500	1950	900	5885	78
	520/85 R 46	158 A8/B	1,6	DW16 L	535	2050	930	6150	78
50	480/80 R 50	159 A8/B	2,4	DW16L	500	2045	950	6225	79

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

280/85 R 24 115 A8/B TL Traxion 85									
EAN		8714692244551				Section width		295 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1090 mm	
Tyre construction		Radial				Static loaded radius		520 mm	
Recommended rim width		W10				Rolling circumference		3275 mm	
Permitted rim width		W9				SRI		525	
Alternative size description		11.2 R 24				Tread depth		37 mm	
EAN Tube		8714692239724				75% of the tyre volume		75 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1000	1135	1275	1410	1550	1660	1755	1860
	10H	775	895	1020	1140	1225	1300		
	25	800	930	1055	1185	1270	1350		
	30	775	895	1020	1140	1225	1300		
	40		840	955	1065	1145	1215		
	50		840	955	1065	1145	1215		

For remarks and the explanation of abbreviations, see inside of the last page.

280/85 R 24 130 A8/B TL Traxion 85 II										
EAN		8714692350566				Section width		295 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1090 mm		
Tyre construction		Radial				Static loaded radius		520 mm		
Recommended rim width		W10				Rolling circumference		3275 mm		
Permitted rim width		W9				SRI		525		
						Tread depth		37 mm		
EAN Tube		8714692239724				75% of the tyre volume		75 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10L	1165	1385	1610	1860	2005	2100	2265	2430	2520
	10H	925	1095	1300	1430	1500	1665	1800	1915	2035
	25	955	1135	1350	1480	1555	1730	1865	1990	2110
	30	925	1095	1300	1430	1500	1665	1800	1915	2035
	40		1025	1215	1335	1400	1555	1680	1790	1900
	50		1025	1215	1335	1400	1555	1680	1790	1900

For remarks and the explanation of abbreviations, see inside of the last page.

320/85 R 24 TL 122 A8/B Traxion 85									
EAN		8714692109751			Section width		335 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1145 mm		
Tyre construction		Radial			Static loaded radius		540 mm		
Recommended rim width		W11			Rolling circumference		3430 mm		
Permitted rim width		W9, W/DW10			SRI		550		
Alternative size description		12.4 R 24			Tread depth		40 mm		
EAN Tube		8714692239731			75% of the tyre volume		100 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1225	1395	1565	1730	1900	2035	2155	2280
	10H	950	1100	1250	1400	1505	1605		
	25	985	1140	1295	1450	1560	1665		
	30	950	1100	1250	1400	1505	1605		
	40		1030	1170	1310	1405	1500		
	50		1030	1170	1310	1405	1500		

For remarks and the explanation of abbreviations, see inside of the last page.

340/85 R 24 125 A8/B TL Traxion 85									
EAN		8714692109768			Section width		360 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1190 mm		
Tyre construction		Radial			Static loaded radius		550 mm		
Recommended rim width		W12			Rolling circumference		3535 mm		
Permitted rim width		W11, W12L			SRI		575		
Alternative size description		13.6 R 24			Tread depth		41 mm		
EAN Tube		8714692239748			75% of the tyre volume		125 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1350	1530	1715	1900	2085	2235	2365	2505
	10H	1040	1210	1375	1535	1650	1765		
	25	1080	1255	1425	1595	1710	1830		
	30	1040	1210	1375	1535	1650	1765		
	40		1130	1285	1435	1540	1650		
	50		1130	1285	1435	1540	1650		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

380/85 R 24 131 A8/B TL Traxion 85									
EAN		8714692109775			Section width		400 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1240 mm		
Tyre construction		Radial			Static loaded radius		580 mm		
Recommended rim width		W13			Rolling circumference		3710 mm		
Permitted rim width		W11, W12(L), DW13(L)			SRI		600		
Alternative size description		14.9 R 24			Tread depth		43 mm		
EAN Tube		8714692239755			75% of the tyre volume		155 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1600	1820	2040	2260	2480	2660	2810	2980
	10H	1235	1435	1630	1825	1960	2085		
	25	1285	1490	1695	1895	2035	2165		
	30	1235	1435	1630	1825	1960	2085		
	40		1340	1525	1705	1835	1950		
	50		1340	1525	1705	1835	1950		

For remarks and the explanation of abbreviations, see inside of the last page.

420/85 R 24 137 A8/B TL Traxion 85									
EAN		8714692206344			Section width		450 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1320 mm		
Tyre construction		Radial			Static loaded radius		620 mm		
Recommended rim width		DW15L			Rolling circumference		3925 mm		
Permitted rim width		W/DW13(L), W/DW14L, W15L			SRI		625		
Alternative size description		16.9 R 24			Tread depth		45 mm		
EAN Tube		8714692283727			75% of the tyre volume		210 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1875	2130	2390	2645	2905	3110	3290	3485
	10H	1450	1680	1910	2140	2295	2460		
	25	1500	1745	1980	2220	2380	2555		
	30	1450	1680	1910	2140	2295	2460		
	40		1570	1785	2000	2145	2300		
	50		1570	1785	2000	2145	2300		

For remarks and the explanation of abbreviations, see inside of the last page.

280/85 R 28 118 A8/B TL Traxion 85									
EAN		8714692309779			Section width		285 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1195 mm		
Tyre construction		Radial			Static loaded radius		555 mm		
Recommended rim width		W10			Rolling circumference		3540 mm		
Permitted rim width		W9			SRI		575		
Alternative size description		11.2 R 28			Tread depth		36 mm		
EAN Tube		8714692239762			75% of the tyre volume		90 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1080	1225	1375	1520	1670	1790	1895	2005
	10H	835	965	1100	1230	1320	1410		
	25	865	1005	1140	1275	1370	1465		
	30	835	965	1100	1230	1320	1410		
	40		905	1025	1150	1235	1320		
	50		905	1025	1150	1235	1320		

For remarks and the explanation of abbreviations, see inside of the last page.

320/85 R 28 124 A8/B TL Traxion 85									
EAN		8714692109782			Section width		335 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1250 mm		
Tyre construction		Radial			Static loaded radius		585 mm		
Recommended rim width		W11			Rolling circumference		3725 mm		
Permitted rim width		W9, W/DW10			SRI		600		
Alternative size description		12.4 R 28			Tread depth		40 mm		
EAN Tube		8714692239779			75% of the tyre volume		115 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1320	1500	1680	1860	2045	2190	2315	2455
	10H	1020	1185	1345	1505	1615	1710		
	25	1055	1225	1395	1560	1675	1775		
	30	1020	1185	1345	1505	1615	1710		
	40		1105	1255	1405	1510	1600		
	50		1105	1255	1405	1510	1600		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

340/85 R 28 127 A8/B TL Traxion 85									
EAN		8714692109799			Section width		360 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1290 mm		
Tyre construction		Radial			Static loaded radius		610 mm		
Recommended rim width		W12			Rolling circumference		3870 mm		
Permitted rim width		W11, W12L			SRI		625		
Alternative size description		13.6 R 28			Tread depth		41 mm		
EAN Tube		8714692239748			75% of the tyre volume		135 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1445	1645	1845	2040	2240	2400	2540	2690
	10H	1120	1295	1475	1650	1770	1875		
	25	1160	1345	1530	1710	1840	1945		
	30	1120	1295	1475	1650	1770	1875		
	40		1210	1380	1540	1655	1750		
	50		1210	1380	1540	1655	1750		

For remarks and the explanation of abbreviations, see inside of the last page.

380/85 R 28 133 A8/B TL Traxion 85									
EAN		8714692109805			Section width		400 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1345 mm		
Tyre construction		Radial			Static loaded radius		630 mm		
Recommended rim width		W13			Rolling circumference		3985 mm		
Permitted rim width		W11, W12(L)			SRI		650		
Alternative size description		14.9 R 28			Tread depth		43 mm		
EAN Tube		8714692239748			75% of the tyre volume		175 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1715	1950	2185	2420	2660	2850	3010	3190
	10H	1325	1540	1750	1955	2100	2205		
	25	1375	1595	1815	2030	2180	2285		
	30	1325	1540	1750	1955	2100	2205		
	40		1440	1635	1830	1965	2060		
	50		1440	1635	1830	1965	2060		

For remarks and the explanation of abbreviations, see inside of the last page.



420/85 R 28 139 A8/B TL Traxion 85									
EAN		8714692109812			Section width		455 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1415 mm		
Tyre construction		Radial			Static loaded radius		660 mm		
Recommended rim width		DW15L			Rolling circumference		4215 mm		
Permitted rim width		W13, W/DW14L, W15L			SRI		675		
Alternative size description		16.9 R 28			Tread depth		45 mm		
EAN Tube		8714692239809			75% of the tyre volume		235 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2005	2275	2555	2825	3105	3325	3515	3725
	10H	1550	1795	2040	2285	2455	2600		
	25	1605	1865	2120	2370	2545	2695		
	30	1550	1795	2040	2285	2455	2600		
	40		1680	1910	2135	2295	2430		
	50		1680	1910	2135	2295	2430		

For remarks and the explanation of abbreviations, see inside of the last page.

380/85 R 30 135 A8/B TL Traxion 85 II									
EAN		8714692336591			Section width		390 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1410 mm		
Tyre construction		Radial			Static loaded radius		645 mm		
Recommended rim width		W12			Rolling circumference		4150 mm		
Permitted rim width		W11, W13			SRI		675		
Alternative size description		14.9 R 30			Tread depth		43 mm		
					75% of the tyre volume		230 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1770	2010	2260	2500	2745	2940	3110	3295
	10H	1370	1590	1805	2020	2170	2335		
	25	1420	1650	1875	2095	2250	2420		
	30	1370	1590	1805	2020	2170	2335		
	40		1485	1685	1890	2030	2180		
	50		1485	1685	1890	2030	2180		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

420/85 R 30 140 A8/B TL Traxion 85									
EAN		8714692109829				Section width		455 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1470 mm	
Tyre construction		Radial				Static loaded radius		685 mm	
Recommended rim width		DW15L				Rolling circumference		4425 mm	
Permitted rim width		W13, W/DW14L, W15L				SRI		700	
Alternative size description		16.9 R 30				Tread depth		45 mm	
EAN Tube		8714692331381				75% of the tyre volume		245 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2070	2345	2635	2915	3200	3430	3625	3845
	10H	1595	1855	2105	2355	2530	2675		
	25	1655	1920	2185	2445	2625	2775		
	30	1595	1855	2105	2355	2530	2675		
	40		1730	1970	2205	2365	2500		
	50		1730	1970	2205	2365	2500		

For remarks and the explanation of abbreviations, see inside of the last page.

460/85 R 30 145 A8/B TL Traxion 85									
EAN		8714692309809			Section width		490 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1545 mm		
Tyre construction		Radial			Static loaded radius		725 mm		
Recommended rim width		DW15L			Rolling circumference		4605 mm		
Permitted rim width		DW13, W/DW14L, W15L			SRI		725		
Alternative size description		18.4 R 30			Tread depth		47 mm		
EAN Tube		8714692331527			75% of the tyre volume		330 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2380	2705	3035	3360	3690	3950	4175	4430
	10H	1840	2135	2425	2715	2915	3105		
	25	1905	2215	2515	2815	3025	3220		
	30	1840	2135	2425	2715	2915	3105		
	40		1995	2265	2535	2725	2900		
	50		1995	2265	2535	2725	2900		

For remarks and the explanation of abbreviations, see inside of the last page.

380/85 R 34 137 A8/B TL Traxion 85 II

EAN		8714692336607				Section width		390 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1505 mm	
Tyre construction		Radial				Static loaded radius		680 mm	
Recommended rim width		W12				Rolling circumference		4470 mm	
Permitted rim width		W11, W13				SRI		725	
Alternative size description		14.9 R 34				Tread depth		43 mm	
						75% of the tyre volume		250 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1880	2135	2395	2655	2915	3120	3300	3500
	10H	1455	1685	1915	2145	2305	2460		
	25	1505	1750	1990	2225	2390	2555		
	30	1455	1685	1915	2145	2305	2460		
	40		1575	1790	2005	2155	2300		
	50		1575	1790	2005	2155	2300		

For remarks and the explanation of abbreviations, see inside of the last page.

420/85 R 34 142 A8/B TL Traxion 85

EAN		8714692109836		Section width		455 mm			
Nominal tyre pressure		1,6 bar		Overall diameter		1570 mm			
Tyre construction		Radial		Static loaded radius		735 mm			
Recommended rim width		DW15L		Rolling circumference		4700 mm			
Permitted rim width		W/DW13, W/DW14L, W15L		SRI		750			
Alternative size description		16.9 R 34		Tread depth		45 mm			
EAN Tube		8714692331404		75% of the tyre volume		265 l			
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2190	2485	2790	3090	3395	3635	3845	4075
	10H	1690	1965	2230	2495	2680	2835		
	25	1755	2035	2315	2590	2785	2940		
	30	1690	1965	2230	2495	2680	2835		
	40		1835	2085	2335	2505	2650		
	50		1835	2085	2335	2505	2650		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

460/85 R 34 147 A8/B TL Traxion 85									
EAN		8714692109843				Section width		490 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1640 mm	
Tyre construction		Radial				Static loaded radius		765 mm	
Recommended rim width		DW16L				Rolling circumference		4915 mm	
Permitted rim width		W/DW14L,				SRI		775	
		W/DW15L, W16L				Tread depth		48 mm	
Alternative size description		18.4 R 34				75% of the tyre volume		340 l	
EAN Tube		8714692331411							
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2520	2860	3210	3550	3900	4180	4420	4685
	10H	1945	2255	2565	2870	3085	3290		
	25	2020	2340	2660	2980	3200	3415		
	30	1945	2255	2565	2870	3085	3290		
	40		2110	2400	2685	2885	3075		
	50		2110	2400	2685	2885	3075		

For remarks and the explanation of abbreviations, see inside of the last page.

340/85 R 38 133 A8/B TL Traxion 85									
EAN		8714692109850			Section width		360 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1550 mm		
Tyre construction		Radial			Static loaded radius		730 mm		
Recommended rim width		W12			Rolling circumference		4680 mm		
Permitted rim width		W11,DW12			SRI		750		
Alternative size description		13.6 R 38			Tread depth		41 mm		
EAN Tube		8714692331442			75% of the tyre volume		170 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	1685	1910	2145	2375	2605	2790	2955	3130
	10H	1300	1510	1715	1920	2060	2205		
	25	1350	1565	1780	1990	2140	2285		
	30	1300	1510	1715	1920	2060	2205		
	40		1410	1600	1795	1925	2060		
	50		1410	1600	1795	1925	2060		

For remarks and the explanation of abbreviations, see inside of the last page.

380/80 R 38 142 A8/B TL Traxion 85													
EAN		8714692327155					Section width				390 mm		
Nominal tyre pressure		2,4 bar					Overall diameter				1580 mm		
Tyre construction		Radial					Static loaded radius				735 mm		
Recommended rim width		W12					Rolling circumference				4820 mm		
Permitted rim width		W11, W13					SRI				750		
Alternative size description		14.9 R 38					Tread depth				43 mm		
							75% of the tyre volume				260 l		
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	1890	2145	2410	2665	2925	3135	3315	3515	3660	3790	3945	3975
	10H	1460	1695	1925	2155	2315	2460	2585	2695	2795	2835		
	25	1515	1755	1995	2235	2400	2555	2680	2800	2895	2940		
	30	1460	1695	1925	2155	2315	2460	2585	2695	2795	2835		
	40			1800	2015	2160	2300	2415	2520	2610	2650		
	50			1800	2015	2160	2300	2415	2520	2610	2650		

For remarks and the explanation of abbreviations, see inside of the last page.

420/85 R 38 144 A8/B TL Traxion 85									
EAN		8714692109867			Section width			455 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1670 mm	
Tyre construction		Radial			Static loaded radius			780 mm	
Recommended rim width		DW15L			Rolling circumference			5035 mm	
Permitted rim width		W/DW14L, W15L			SRI			800	
Alternative size description		16.9 R 38			Tread depth			45 mm	
EAN Tube		8714692331459			75% of the tyre volume			290 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2310	2625	2945	3260	3580	3835	4055	4295
	10H	1785	2070	2355	2635	2830	2995		
	25	1850	2150	2440	2735	2935	3110		
	30	1785	2070	2355	2635	2830	2995		
	40		1935	2200	2460	2645	2800		
	50		1935	2200	2460	2645	2800		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

460/85 R 38 149 A8/B TL Traxion 85									
EAN		8714692109874			Section width		490 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1750 mm		
Tyre construction		Radial			Static loaded radius		815 mm		
Recommended rim width		DW16L			Rolling circumference		5205 mm		
Permitted rim width		W/DW14L,			SRI		825		
		W/DW15L, W16L			Tread depth		48 mm		
Alternative size description		18.4 R 38			75% of the tyre volume		365 l		
EAN Tube		8714692331466							
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	2655	3010	3380	3740	4110	4400	4655	4935
	10H	2050	2380	2705	3025	3250	3480		
	25	2125	2465	2805	3140	3370	3610		
	30	2050	2380	2705	3025	3250	3480		
	40		2220	2525	2825	3035	3250		
	50		2220	2525	2825	3035	3250		

For remarks and the explanation of abbreviations, see inside of the last page.

520/85 R 38 155 A8/B TL Traxion 85									
EAN		8714692109881			Section width		555 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1830 mm		
Tyre construction		Radial			Static loaded radius		850 mm		
Recommended rim width		DW18L			Rolling circumference		5465 mm		
Permitted rim width		DD16L,			SRI		875		
		W/DW16L, W18L			Tread depth		52 mm		
Alternative size description		20.8 R 38			75% of the tyre volume		490 l		
EAN Tube		8714692331473							
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	3200	3635	4080	4515	4960	5315	5620	5955
	10H	2475	2870	3260	3650	3920	4145		
	25	2565	2975	3385	3785	4070	4300		
	30	2475	2870	3260	3650	3920	4145		
	40		2680	3050	3410	3665	3875		
	50		2680	3050	3410	3665	3875		

For remarks and the explanation of abbreviations, see inside of the last page.

480/80 R 42 156 A8/B TL Traxion 85													
EAN		8714692327179				Section width				500 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				1850 mm			
Tyre construction		Radial				Static loaded radius				855 mm			
Recommended rim width		DW16L				Rolling circumference				5600 mm			
Permitted rim width		DD16L, W16L, W/DW16A*				SRI				875			
Alternative size description		18.4 R 42				Tread depth				49 mm			
						75% of the tyre volume				490 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	2820	3200	3595	3980	4370	4680	4950	5245	5465	5655	5885	6000
	10H	2180	2530	2875	3215	3455	3690	3860	4025	4170	4280		
	25	2260	2620	2980	3335	3585	3830	4005	4175	4325	4440		
	30	2180	2530	2875	3215	3455	3690	3860	4025	4170	4280		
	40			2685	3005	3230	3450	3605	3760	3895	4000		
	50			2685	3005	3230	3450	3605	3760	3895	4000		

For remarks and the explanation of abbreviations, see inside of the last page.

520/85 R 42 157 A8/B TL Traxion 85									
EAN		8714692244544			Section width		555 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1930 mm		
Tyre construction		Radial			Static loaded radius		905 mm		
Recommended rim width		DW18L			Rolling circumference		5785 mm		
Permitted rim width		DW16L, DD18L			SRI		925		
Alternative size description		20.8 R 42			Tread depth		52 mm		
					75% of the tyre volume		510 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	3355	3810	4275	4730	5195	5565	5885	6240
	10H	2590	3005	3415	3825	4105	4415		
	25	2685	3120	3545	3965	4260	4580		
	30	2590	3005	3415	3825	4105	4415		
	40		2810	3195	3575	3840	4125		
	50		2810	3195	3575	3840	4125		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE RADIAL

480/80 R 46 158 A8/B TL Traxion 85													
EAN		8714692327193					Section width				500 mm		
Nominal tyre pressure		2,4 bar					Overall diameter				1950 mm		
Tyre construction		Radial					Static loaded radius				900 mm		
Recommended rim width		DW16L					Rolling circumference				5885 mm		
Permitted rim width		DD16L, W16L, W/DW16A*					SRI				925		
Alternative size description		18.4 R 46					Tread depth				49 mm		
							75% of the tyre volume				525 l		
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	2950	3350	3760	4160	4570	4895	5175	5490	5720	5915	6155	6375
	10H	2280	2645	3005	3365	3615	3800	4035	4210	4360	4550		
	25	2365	2745	3120	3490	3750	3940	4190	4370	4525	4720		
	30	2280	2645	3005	3365	3615	3800	4035	4210	4360	4550		
	40			2810	3145	3375	3550	3775	3935	4075	4250		
	50			2810	3145	3375	3550	3775	3935	4075	4250		

For remarks and the explanation of abbreviations, see inside of the last page.

520/85 R 46 158 A8/B TL Traxion 85									
EAN		8714692244544			Section width			535 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			2050 mm	
Tyre construction		Radial			Static loaded radius			930 mm	
Recommended rim width		DW16L			Rolling circumference			6150 mm	
Permitted rim width		DW18L			SRI			975	
Alternative size description		20.8 R 46			Tread depth			51 mm	
					75% of the tyre volume			650 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre (kg)							
Speed (km/h)	10L	3505	3975	4465	4940	5425	5810	6145	6515
	10H	2705	3140	3570	3995	4290	4550		
	25	2805	3255	3705	4145	4450	4720		
	30	2705	3140	3570	3995	4290	4550		
	40		2935	3335	3735	4010	4250		
	50		2935	3335	3735	4010	4250		

For remarks and the explanation of abbreviations, see inside of the last page.

480/80 R 50 159 A8/B TL Traxion 85													
EAN			8714692327216				Section width			500 mm			
Nominal tyre pressure			2,4 bar				Overall diameter			2045 mm			
Tyre construction			Radial				Static loaded radius			950 mm			
Recommended rim width			DW16L				Rolling circumference			6225 mm			
Permitted rim width			DWL14L,				SRI			975			
			W/DW15L, W16L				Tread depth			49 mm			
Alternative size description			18.4 R 50				75% of the tyre volume			550 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10L	3080	3495	3925	4340	4770	5105	5400	5725	5965	6175	6425	6565
	10H	2375	2760	3135	3510	3770	4015	4210	4395	4550	4680		
	25	2465	2860	3255	3640	3910	4165	4370	4560	4720	4855		
	30	2375	2760	3135	3510	3770	4015	4210	4395	4550	4680		
	40			2930	3280	3525	3750	3935	4105	4250	4375		
	50			2930	3280	3525	3750	3935	4105	4250	4375		

For remarks and the explanation of abbreviations, see inside of the last page.

TRACTOR TYRES - DRIVE BIAS



FAKTOR-S

THE PERFECT CHOICE
FOR LIGHT TRACTORS

FEATURES	BENEFITS
Strong nylon carcass	Durability, reliability and stability
Wide, long cleats	Very comfortable ride
Sturdy sidewall structure	Resistance to external damage



Ø	Tyre size	TT/TL	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
24	9.5 - 24	TT	8	112 A8	2,8	W8	240	1050	490	3150	82
	11.2 - 24	TT	8	116 A8	2,4	DW10	290	1100	515	3305	82
	12.4 - 24	TT	8	121 A8	2,3	W11	315	1160	540	3475	82
	13.6 - 24	TT	8	123 A8	2,0	W12	345	1205	560	3615	82
	14.9 - 24	TT	8	128 A8	1,8	W13	375	1260	590	3780	82
28	11.2 - 28	TT	8	118 A8	2,4	DW10	285	1205	560	3615	83
	12.4 - 28	TT	8	123 A8	2,3	W11	315	1260	590	3780	83
	13.6 - 28	TT	8	125 A8	2,0	W12	340	1305	610	3920	83
	14.9 - 28	TT	8	130 A8	1,8	W13	375	1360	635	4080	83
	16.9 - 28	TT	10	139 A8	2,0	DW15L	430	1435	670	4305	83
30	16.9 - 30	TT	8	137 A8	1,7	DW15L	430	1485	690	4450	84
	18.4 - 30	TT	12	149 A8	1,4	DW16L	465	1545	720	4630	84
32	12.4 - 32	TT	8	125 A8	2,2	W11	315	1360	635	4080	84
34	16.9 - 34	TT	8	139 A8	1,7	DW15L	430	1580	735	4745	84
	18.4 - 34	TT	8	142 A8	1,4	DW16L	465	1645	765	4940	84

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES - DRIVE BIAS

9.5 - 24 8 PR / 112 A8 TT FAKTOR-S

EAN	8714692291920	Section width	240 mm
Nominal tyre pressure	2,8 bar	Overall diameter	1050 mm
Tyre construction	Bias	Static loaded radius	490 mm
Recommended rim width	W8	Rolling circumference	3150 mm
Permitted rim width	W7	Load capacity at 10 km/h	1800 kg
Tread depth	29 mm	Load capacity at 30 km/h	1200 kg
EAN Tube	8714692320569	Load capacity at 40 km/h	1120 kg

11.2 - 24 8 PR / 116 A8 TT FAKTOR-S

EAN	8714692291937	Section width	290 mm
Nominal tyre pressure	2,4 bar	Overall diameter	1100 mm
Tyre construction	Bias	Static loaded radius	515 mm
Recommended rim width	DW10	Rolling circumference	3305 mm
Permitted rim width	W9, W10	Load capacity at 10 km/h	2010 kg
Tread depth	29 mm	Load capacity at 30 km/h	1340 kg
EAN Tube	8714692239724	Load capacity at 40 km/h	1250 kg

12.4 - 24 8 PR / 121 A8 TT FAKTOR-S

EAN	8714692291944	Section width	315 mm
Nominal tyre pressure	2,3 bar	Overall diameter	1160 mm
Tyre construction	Bias	Static loaded radius	540 mm
Recommended rim width	W11	Rolling circumference	3475 mm
Permitted rim width	W9, W/DW10	Load capacity at 10 km/h	2325 kg
Tread depth	33 mm	Load capacity at 30 km/h	1550 kg
EAN Tube	8714692239731	Load capacity at 40 km/h	1450 kg

13.6 - 24 8 PR / 123 A8 TT FAKTOR-S

EAN	8714692319686	Section width	345 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1205 mm
Tyre construction	Bias	Static loaded radius	560 mm
Recommended rim width	W12	Rolling circumference	3615 mm
Permitted rim width	W11, W12L	Load capacity at 10 km/h	2490 kg
Tread depth	36 mm	Load capacity at 30 km/h	1660 kg
EAN Tube	8714692239748	Load capacity at 40 km/h	1550 kg

14.9 - 24 8 PR / 128 A8 TT FAKTOR-S

EAN	8714692291951	Section width	375 mm
Nominal tyre pressure	1,8 bar	Overall diameter	1260 mm
Tyre construction	Bias	Static loaded radius	590 mm
Recommended rim width	W13	Rolling circumference	3780 mm
Permitted rim width	W11, W12(L), DW13(L)	Load capacity at 10 km/h	2890 kg
Tread depth	36 mm	Load capacity at 30 km/h	1925 kg
EAN Tube	8714692239755	Load capacity at 40 km/h	1800 kg

11.2 - 28 8 PR / 118 A8 TT FAKTOR-S

EAN	8714692291968	Section width	285 mm
Nominal tyre pressure	2,4 bar	Overall diameter	1205 mm
Tyre construction	Bias	Static loaded radius	560 mm
Recommended rim width	DW10	Rolling circumference	3615 mm
Permitted rim width	W9, W10	Load capacity at 10 km/h	2115 kg
Tread depth	34 mm	Load capacity at 30 km/h	1410 kg
EAN Tube	8714692239762	Load capacity at 40 km/h	1320 kg

12.4 - 28 8 PR / 123 A8 TT FAKTOR-S

EAN	8714692291975	Section width	315 mm
Nominal tyre pressure	2,3 bar	Overall diameter	1260 mm
Tyre construction	Bias	Static loaded radius	590 mm
Recommended rim width	W11	Rolling circumference	3780 mm
Permitted rim width	W9, W/DW10	Load capacity at 10 km/h	2490 kg
Tread depth	33 mm	Load capacity at 30 km/h	1660 kg
EAN Tube	8714692239779	Load capacity at 40 km/h	1550 kg

13.6 - 28 8 PR / 125 A8 TT FAKTOR-S

EAN	8714692291982	Section width	340 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1305 mm
Tyre construction	Bias	Static loaded radius	610 mm
Recommended rim width	W12	Rolling circumference	3920 mm
Permitted rim width	W11, W12L	Load capacity at 10 km/h	2650 kg
Tread depth	36 mm	Load capacity at 30 km/h	1765 kg
EAN Tube	8714692239786	Load capacity at 40 km/h	1650 kg

14.9 - 28 8 PR / 130 A8 TT FAKTOR-S

EAN	8714692291999	Section width	375 mm
Nominal tyre pressure	1,8 bar	Overall diameter	1360 mm
Tyre construction	Bias	Static loaded radius	635 mm
Recommended rim width	W13	Rolling circumference	4080 mm
Permitted rim width	W11, W12(L), DW13(L)	Load capacity at 10 km/h	3055 kg
Tread depth	36 mm	Load capacity at 30 km/h	2035 kg
EAN Tube	8714692239793	Load capacity at 40 km/h	1900 kg

16.9 - 28 10 PR / 139 A8 TT FAKTOR-S

EAN	8714692322273	Section width	430 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1435 mm
Tyre construction	Bias	Static loaded radius	670 mm
Recommended rim width	DW15L	Rolling circumference	4305 mm
Permitted rim width	W/DW14L, W15L	Load capacity at 10 km/h	3900 kg
Tread depth	37 mm	Load capacity at 30 km/h	2600 kg
EAN Tube	8714692239809	Load capacity at 40 km/h	2430 kg

TRACTOR TYRES - DRIVE BIAS

16.9 - 30 8 PR / 137 A8 TT FAKTOR-S

EAN	8714692292002	Section width	430 mm
Nominal tyre pressure	1,7 bar	Overall diameter	1485 mm
Tyre construction	Bias	Static loaded radius	690 mm
Recommended rim width	DW15L	Rolling circumference	4450 mm
Permitted rim width	W/DW14L, W15L	Load capacity at 10 km/h	3690 kg
Tread depth	39 mm	Load capacity at 30 km/h	2460 kg
EAN Tube	8714692331381	Load capacity at 40 km/h	2300 kg

18.4 - 30 12 PR / 149 A8 TT FAKTOR-S

EAN	8714692292026	Section width	465 mm
Nominal tyre pressure	2,3 bar	Overall diameter	1545 mm
Tyre construction	Bias	Static loaded radius	720 mm
Recommended rim width	DW16L	Rolling circumference	4630 mm
Permitted rim width	W/DW15L, W16L	Load capacity at 10 km/h	5220 kg
Tread depth	41 mm	Load capacity at 30 km/h	3480 kg
EAN Tube	8714692331527	Load capacity at 40 km/h	3250 kg

12.4 - 32 8 PR / 125 A8 TT FAKTOR-S

EAN	8714692292033	Section width	315 mm
Nominal tyre pressure	2,2 bar	Overall diameter	1360 mm
Tyre construction	Bias	Static loaded radius	635 mm
Recommended rim width	W11	Rolling circumference	4080 mm
Permitted rim width	W9, W/DW10	Load capacity at 10 km/h	2650 kg
Tread depth	33 mm	Load capacity at 30 km/h	1765 kg
EAN Tube	8714692331398	Load capacity at 40 km/h	1650 kg

16.9 - 34 8 PR / 139 A8 TT FAKTOR-S

EAN	8714692292040	Section width	430 mm
Nominal tyre pressure	1,7 bar	Overall diameter	1580 mm
Tyre construction	Bias	Static loaded radius	735 mm
Recommended rim width	DW15L	Rolling circumference	4745 mm
Permitted rim width	W/DW14L, W15L	Load capacity at 10 km/h	3900 kg
Tread depth	39 mm	Load capacity at 30 km/h	2600 kg
EAN Tube	8714692331404	Load capacity at 40 km/h	2430 kg

18.4 - 34 8 PR / 142 A8 TT FAKTOR-S

EAN	8714692292057	Section width	465 mm
Nominal tyre pressure	1,4 bar	Overall diameter	1645 mm
Tyre construction	Bias	Static loaded radius	765 mm
Recommended rim width	DW16L	Rolling circumference	4940 mm
Permitted rim width	W/DW15L, W16L	Load capacity at 10 km/h	4255 kg
Tread depth	41 mm	Load capacity at 30 km/h	2835 kg
EAN Tube	8714692331411	Load capacity at 40 km/h	2650 kg



TRACTOR TYRES - FRONT



MULTI RILL

FRONT TYRE FOR
GRASS AND CROP

FEATURES	BENEFITS
Ribbed tread	Good self-cleaning
Wide, longitudinal grooves	Excellent course stability
Rounded contour	Prevents damage to the grass

Ø	Tyre size	TT/TL	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	Page
15.3	11.5/80 - 15.3	TT	8	119 A8	2,7	9.00	300	875	400	87
16	5.50 - 16	TT	6	86 A8	3,8	4.00E	160	720	340	87
	6.00 - 16	TT	6	88 A8	3,4	4.50E	175	750	355	87
	6.50 - 16	TT	6	91 A8	3,2	4.50E	185	780	375	87
	7.50 - 16	TT	6	98 A8	2,8	5.50F	210	825	390	87
	7.50 - 16	TT	8	103 A8	3,8	5.50F	210	825	390	88
	9.00 - 16	TT	10	116 A8	4,0	W8	265	885	420	88
	10.00 - 16	TT	8	115 A8	2,8	W8	285	915	430	88
	11.00 - 16	TT	10	122 A8	3,2	W10L	330	990	465	88
18	7.50 - 18	TT	8	106 A8	3,8	5.50F	215	880	415	88
19	6.00 - 19	TT	6	93 A8	3,4	4.50E	170	830	390	89
20	7.50 - 20	TT	8	109 A8	3,4	5.50F	215	935	445	89

For the explanation of the symbols and abbreviations, see the inside of the last page.

11.5/80 - 15.3 8 PR / 119 A8 TT MULTI RILL

EAN	8714692051814	Section width	300 mm
Nominal tyre pressure	2,7 bar	Overall diameter	875 mm
Tyre construction	Bias	Static loaded radius	400 mm
Recommended rim width	9.00	Load capacity at 30 km/h	1510 kg
Permitted rim width		Load capacity at 40 km/h	1360 kg
EAN Tube	8714692239014	Tread depth	18 mm

5.50 - 16 6 PR / 86 A8 TT MULTI RILL

EAN	8714692051852	Section width	160 mm
Nominal tyre pressure	3,8 bar	Overall diameter	720 mm
Tyre construction	Bias	Static loaded radius	340 mm
Recommended rim width	4.00E	Load capacity at 30 km/h	590 kg
Permitted rim width	3.50D, 4.50E	Load capacity at 40 km/h	530 kg
EAN Tube	8714692239137	Tread depth	15 mm

6.00 - 16 6 PR / 88 A8 TT MULTI RILL

EAN	8714692051876	Section width	175 mm
Nominal tyre pressure	3,4 bar	Overall diameter	750 mm
Tyre construction	Bias	Static loaded radius	355 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	620 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	560 kg
EAN Tube	8714692239137	Tread depth	16 mm

6.50 - 16 6 PR / 91 A8 TT MULTI RILL

EAN	8714692051890	Section width	185 mm
Nominal tyre pressure	3,2 bar	Overall diameter	780 mm
Tyre construction	Bias	Static loaded radius	375 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	680 kg
Permitted rim width	4.00E, 5.00F, 5.50F	Load capacity at 40 km/h	615 kg
EAN Tube	8714692239144	Tread depth	18 mm

7.50 - 16 6 PR / 98 A8 TT MULTI RILL

EAN	8714692051913	Section width	210 mm
Nominal tyre pressure	2,8 bar	Overall diameter	825 mm
Tyre construction	Bias	Static loaded radius	390 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	830 kg
Permitted rim width	5.00F, 6.00F	Load capacity at 40 km/h	750 kg
EAN Tube	8714692239151	Tread depth	20 mm

TRACTOR TYRES - FRONT

7.50 - 16 8 PR / 103 A8 TT MULTI RILL

EAN	8714692051937	Section width	210 mm
Nominal tyre pressure	3,8 bar	Overall diameter	825 mm
Tyre construction	Bias	Static loaded radius	390 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	970 kg
Permitted rim width	5.00F, 6.00F	Load capacity at 40 km/h	875 kg
EAN Tube	8714692239151	Tread depth	20 mm

9.00 - 16 10 PR / 116 A8 TT MULTI RILL

EAN	8714692051951	Section width	265 mm
Nominal tyre pressure	4,0 bar	Overall diameter	885 mm
Tyre construction	Bias	Static loaded radius	420 mm
Recommended rim width	W8	Load capacity at 30 km/h	1385 kg
Permitted rim width	6.00F, W8L	Load capacity at 40 km/h	1250 kg
EAN Tube	8714692239168	Tread depth	22 mm

10.00 - 16 8 PR / 115 A8 TT MULTI RILL

EAN	8714692051975	Section width	285 mm
Nominal tyre pressure	2,8 bar	Overall diameter	915 mm
Tyre construction	Bias	Static loaded radius	430 mm
Recommended rim width	W8	Load capacity at 30 km/h	1350 kg
Permitted rim width	W8L	Load capacity at 40 km/h	1215 kg
EAN Tube	8714692239175	Tread depth	24 mm

11.00 - 16 10 PR / 122 A8 TT MULTI RILL

EAN	8714692051999	Section width	330 mm
Nominal tyre pressure	3,2 bar	Overall diameter	990 mm
Tyre construction	Bias	Static loaded radius	465 mm
Recommended rim width	W10L	Load capacity at 30 km/h	1665 kg
Permitted rim width	W8, W8L	Load capacity at 40 km/h	1500 kg
EAN Tube	8714692239182	Tread depth	26 mm

7.50 - 18 8 PR / 106 A8 TT MULTI RILL

EAN	8714692052033	Section width	215 mm
Nominal tyre pressure	3,8 bar	Overall diameter	880 mm
Tyre construction	Bias	Static loaded radius	415 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1055 kg
Permitted rim width		Load capacity at 40 km/h	950 kg
EAN Tube	8714692239199	Tread depth	21 mm

6.00 - 19 6 PR / 93 A8 TT MULTI RILL

EAN	8714692052057	Section width	170 mm
Nominal tyre pressure	3,4 bar	Overall diameter	830 mm
Tyre construction	Bias	Static loaded radius	390 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	720 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	650 kg
EAN Tube	8714692239700	Tread depth	16 mm

7.50 - 20 8 PR / 109 A8 TT MULTI RILL

EAN	8714692052071	Section width	215 mm
Nominal tyre pressure	3,4 bar	Overall diameter	935 mm
Tyre construction	Bias	Static loaded radius	445 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1145 kg
Permitted rim width	5.00F	Load capacity at 40 km/h	1030 kg
EAN Tube	8714692239717	Tread depth	21 mm



TRACTOR TYRES - FRONT



LUG RING

FRONT TYRE FOR
LAND AND ROAD

FEATURES	BENEFITS
Robust shoulder bars	Protection against punctures
Wide tread	Large tread surface
Good rolling capacity	Also suitable for planting & sowing machines

Ø	Tyre size	TT/TL	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	Page
16	5.50 - 16	TT	6	86 A8	3,75	4.00E	160	720	340	91
	6.00 - 16	TT	6	88 A8	3,40	4.50E	175	750	355	91
	6.50 - 16	TT	6	91 A8	3,20	4.50E	185	780	375	91
	7.50 - 16	TT	6	98 A8	2,80	5.50F	210	825	390	91
18	7.50 - 18	TT	6	101 A8	2,75	5.50F	215	880	415	91
	7.50 - 18	TT	8	106 A8	3,75	5.50F	215	880	415	92
19	6.00 - 19	TT	6	93 A8	3,40	4.50E	170	830	390	92

For the explanation of the symbols and abbreviations, see the inside of the last page.

5.50 - 16 6 PR / 86 A8 TT LUG RING

EAN	8714692052095	Section width	160 mm
Nominal tyre pressure	3,8 bar	Overall diameter	720 mm
Tyre construction	Bias	Static loaded radius	340 mm
Recommended rim width	4.00E	Load capacity at 30 km/h	590 kg
Permitted rim width	3.50D, 4.50E	Load capacity at 40 km/h	530 kg
EAN Tube	8714692239137	Tread depth	13 mm

6.00 - 16 6 PR / 88 A8 TT LUG RING

EAN	8714692052118	Section width	175 mm
Nominal tyre pressure	3,4 bar	Overall diameter	750 mm
Tyre construction	Bias	Static loaded radius	355 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	620 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	560 kg
EAN Tube	8714692239137	Tread depth	15 mm

6.50 - 16 6 PR / 91 A8 TT LUG RING

EAN	8714692052132	Section width	185 mm
Nominal tyre pressure	3,2 bar	Overall diameter	780 mm
Tyre construction	Bias	Static loaded radius	375 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	680 kg
Permitted rim width	4.00E, 5.00F, 5.50F	Load capacity at 40 km/h	615 kg
EAN Tube	8714692239144	Tread depth	17 mm

7.50 - 16 6 PR / 98 A8 TT LUG RING

EAN	8714692052156	Section width	210 mm
Nominal tyre pressure	2,8 bar	Overall diameter	825 mm
Tyre construction	Bias	Static loaded radius	390 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	830 kg
Permitted rim width	5.00F, 6.00F	Load capacity at 40 km/h	750 kg
EAN Tube	8714692239151	Tread depth	20 mm

7.50 - 18 6 PR / 101 A8 TT LUG RING

EAN	8714692052170	Section width	215 mm
Nominal tyre pressure	2,8 bar	Overall diameter	880 mm
Tyre construction	Bias	Static loaded radius	415 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	915 kg
Permitted rim width		Load capacity at 40 km/h	825 kg
EAN Tube	8714692239199	Tread depth	20 mm

TRACTOR TYRES - FRONT

7.50 - 18 8 PR / 106 A8 TT LUG RING

EAN	8714692052194	Section width	215 mm
Nominal tyre pressure	3,8 bar	Overall diameter	880 mm
Tyre construction	Bias	Static loaded radius	415 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1055 kg
Permitted rim width		Load capacity at 40 km/h	950 kg
EAN Tube	8714692239199	Tread depth	20 mm

6.00 - 19 6 PR / 93 A8 TT LUG RING

EAN	8714692052217	Section width	170 mm
Nominal tyre pressure	3,4 bar	Overall diameter	830 mm
Tyre construction	Bias	Static loaded radius	390 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	720 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	650 kg
EAN Tube	8714692239700	Tread depth	15 mm



FAKTOR-F

THE TRACTOR FRONT TYRE
FOR THE COST CONSCIOUS FARMER



FEATURES	BENEFITS
Wide longitudinal grooves	Good self-cleaning
Strong nylon carcass	Good resistance to peak loads, e.g. using front loader
A8-rated	Suitable for driving speeds up to 40 km/h

Ø	Tyre size	TT/TL	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	Page
15	5.00 - 15	TT	6	82 A8	3,70	4.00E	140	655	305	94
16	5.50 - 16	TT	6	86 A8	3,70	4.00E	155	715	335	94
	6.00 - 16	TT	8	94 A8	4,50	4.50E	170	735	345	94
	6.50 - 16	TT	8	98 A8	4,20	4.50E	180	765	355	94
	7.50 - 16	TT	8	103 A8	3,70	5.50F	205	810	380	94
	10.00 - 16	TT	8	115 A8	2,80	W8	280	905	425	95
	11.00 - 16	TT	10	122 A8	3,10	W10L	330	975	455	95
18	7.50 - 18	TT	8	106 A8	3,65	5.50F	205	860	400	95
19	4.00 - 19	TT	4	72 A8	3,40	3.00D	110	715	335	95
20	7.50 - 20	TT	8	109 A8	3,40	5.50F	205	915	425	95

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES - FRONT

5.00 - 15 6 PR / 82 A8 TT FAKTOR-F

EAN	8714692335075	Section width	140 mm
Nominal tyre pressure	3,7 bar	Overall diameter	655 mm
Tyre construction	Bias	Static loaded radius	305 mm
Recommended rim width	4.00E	Load capacity at 30 km/h	525 kg
Permitted rim width	3.00D, 4J, 4.5J	Load capacity at 40 km/h	475 kg
EAN Tube		Tread depth	11 mm

5.50 - 16 6 PR / 86 A8 TT FAKTOR-F

EAN	8714692327278	Section width	155 mm
Nominal tyre pressure	3,7 bar	Overall diameter	715 mm
Tyre construction	Bias	Static loaded radius	335 mm
Recommended rim width	4.00E	Load capacity at 30 km/h	585 kg
Permitted rim width	3.50D, 4.50E	Load capacity at 40 km/h	530 kg
EAN Tube	8714692239137	Tread depth	13 mm

6.00 - 16 8 PR / 94 A8 TT FAKTOR-F

EAN	8714692327315	Section width	170 mm
Nominal tyre pressure	4,5 bar	Overall diameter	735 mm
Tyre construction	Bias	Static loaded radius	345 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	740 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	670 kg
EAN Tube	8714692239137	Tread depth	13 mm

6.50 - 16 8 PR / 98 A8 TT FAKTOR-F

EAN	8714692335082	Section width	180 mm
Nominal tyre pressure	4,2 bar	Overall diameter	765 mm
Tyre construction	Bias	Static loaded radius	355 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	830 kg
Permitted rim width	4.00E, 5.00F, 5.50F	Load capacity at 40 km/h	750 kg
EAN Tube	8714692239144	Tread depth	16 mm

7.50 - 16 8 PR / 103 A8 TT FAKTOR-F

EAN	8714692327353	Section width	205 mm
Nominal tyre pressure	3,7 bar	Overall diameter	810 mm
Tyre construction	Bias	Static loaded radius	380 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	970 kg
Permitted rim width	5.00F, 6.00F	Load capacity at 40 km/h	875 kg
EAN Tube	8714692239151	Tread depth	18 mm

10.00 - 16 8 PR / 115 A8 TT FAKTOR-F

EAN	8714692327377	Section width	280 mm
Nominal tyre pressure	2,8 bar	Overall diameter	905 mm
Tyre construction	Bias	Static loaded radius	425 mm
Recommended rim width	W8	Load capacity at 30 km/h	1345 kg
Permitted rim width	W8L	Load capacity at 40 km/h	1215 kg
EAN Tube	8714692239175	Tread depth	21 mm

11.00 - 16 10 PR / 122 A8 TT FAKTOR-F

EAN	8714692335099	Section width	330 mm
Nominal tyre pressure	3,1 bar	Overall diameter	975 mm
Tyre construction	Bias	Static loaded radius	455 mm
Recommended rim width	W10L	Load capacity at 30 km/h	1665 kg
Permitted rim width	W8, W8L	Load capacity at 40 km/h	1500 kg
EAN Tube	8714692239182	Tread depth	22 mm

7.50 - 18 8 PR / 106 A8 TT FAKTOR-F

EAN	8714692327414	Section width	205 mm
Nominal tyre pressure	3,7 bar	Overall diameter	860 mm
Tyre construction	Bias	Static loaded radius	400 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1050 kg
Permitted rim width		Load capacity at 40 km/h	950 kg
EAN Tube	8714692239199	Tread depth	18 mm

4.00 - 19 4 PR / 72 A8 TT FAKTOR-F

EAN	8714692327438	Section width	110 mm
Nominal tyre pressure	3,4 bar	Overall diameter	715 mm
Tyre construction	Bias	Static loaded radius	335 mm
Recommended rim width	3.00D	Load capacity at 30 km/h	390 kg
Permitted rim width		Load capacity at 40 km/h	355 kg
		Tread depth	10 mm

7.50 - 20 8 PR / 109 A8 TT FAKTOR-F

EAN	8714692327452	Section width	205 mm
Nominal tyre pressure	3,4 bar	Overall diameter	915 mm
Tyre construction	Bias	Static loaded radius	425 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1140 kg
Permitted rim width	5.00F	Load capacity at 40 km/h	1030 kg
EAN Tube	8714692239177	Tread depth	18 mm



TRAXION HARVEST

THE HIGHEST PRODUCTIVITY WITH MODERN HARVESTING EQUIPMENT

Unique tread design of
TRAXION HARVEST ensures maximum
traction and optimal stability.

CHO technology allows lower
inflation pressure for maximum soil
preservation and highest yield.



REDESTEIN
YOUR PERFORMANCE TYRES SINCE 1909



HARVESTER TYRES

DRIVE WHEEL

pag.

Traxion Harvest	98
Traxion Optimall	108
TraxionXXL	109

STEERING WHEEL

Traxion Harvest	110
Traxion Versa	116
TraxionXXL / Traxion 65	117



HARVESTER TYRES - DRIVE WHEEL



TRAXION HARVEST

PROVIDING HIGHEST PRODUCTIVITY
WITH MODERN
HARVESTING EQUIPMENT


FEATURES	BENEFITS
Unique curved cleats	High traction, stability & comfort
Strong yet flexible carcass	High load capacity and durability
CHO technology	Maximum soil preservation



TRAXION HARVEST

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
26	620/75 R 26	166 A8/B	3,2	DW20B	610	1585	710	4720	100
32	650/75 R 32	172 A8/B	3,2	DW20B	630	1790	825	5350	100
	680/85 R 32	173 A8/B	2,4	DW21B	665	1950	875	5805	101
	680/85 R 32	179 A8/B	3,2	DW21B	670	1950	875	5805	101
	680/85 R 32 CHO	179 A8/B	3,2	DW21B	670	1950	875	5805	102
	800/65 R 32	172 A8/B	2,4	DW27B	770	1830	835	5450	102
	800/65 R 32 CHO	172 A8/B	2,4	DW27B	770	1830	835	5450	103
	800/65 R 32	178 A8/B	3,2	DW27B	760	1840	835	5500	103
	800/70 R 32	175 A8/B	2,4	DW27B	770	1925	870	5700	104
	800/70 R 32 CHO	175 A8/B	2,4	DW27B	770	1925	870	5700	104
	800/70 R 32	181 A8/B	3,2	DW27B	780	1925	870	5700	105
	900/60 R 32	176 A8/B	2,4	DW27B	835	1885	850	5610	105
	900/60 R 32 CHO	176 A8/B	2,4	DW27B	835	1885	850	5610	106
	900/60 R 32	181 A8/B	3,2	DW27B	835	1885	850	5610	106
38	800/70 R 38	181 D	2,8	DW25B	755	2050	920	6080	107
	800/70 R 38 CHO	181 D	2,8	DW25B	755	2050	920	6080	107

For the explanation of the symbols and abbreviations, see the inside of the last page.

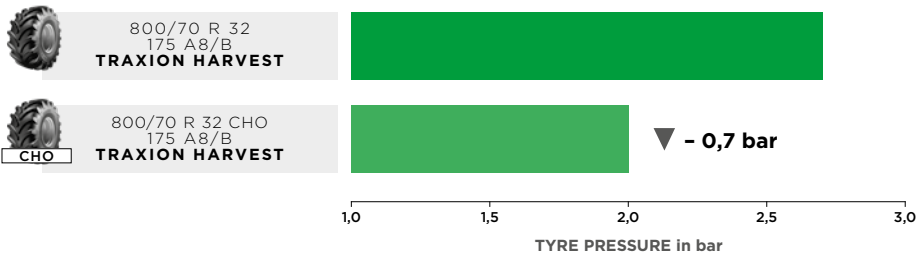

MAXIMUM CYCLIC TYRE LOAD OF 11,500 KG IN HARVESTING OPERATIONS

HARVESTER TYRES - DRIVE WHEEL

620/75 R 26 166 A8/B TL TRAXION HARVEST

EAN		8714692311314				Section width		610 mm		
Nominal tyre pressure		3,2 bar				Overall diameter		1585 mm		
Tyre construction		Radial				Static loaded radius		710 mm		
Recommended rim width		DW20B				Rolling circumference		4720 mm		
Permitted rim width						SRI		750		
						Tread depth		46 mm		
						75% of the tyre volume		457 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10C	4175	4970	5775	6675	7195	7650	8135	8720	9010
	10L	3685	4385	5095	5890	6350	6750	7175	7695	7950
	10H	2920	3465	4145	4520	4815	5275	5670		
	25	3030	3595	4300	4690	4995	5470	5885		
	30	2920	3465	4145	4520	4815	5275	5670		
	40			3875	4225	4500	4930	5300		
	50			3875	4225	4500	4930	5300		

For remarks and the explanation of abbreviations, see inside of the last page.

650/75 R 32 172 A8/B TL TRAXION HARVEST

EAN		8714692309632				Section width		630 mm		
Nominal tyre pressure		3,2 bar				Overall diameter		1790 mm		
Tyre construction		Radial				Static loaded radius		825 mm		
Recommended rim width		DW20B				Rolling circumference		5350 mm		
Permitted rim width		DW21B, DW23B				SRI		825		
						Tread depth		56 mm		
						75% of the tyre volume		566 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10C	4960	5905	6860	7930	8550	9010	9665	10360	10710
	10L	4380	5210	6050	7000	7545	7950	8525	9140	9450
	10H	3470	4120	4950	5370	5670	6265	6740		
	25	3600	4270	5135	5570	5885	6500	6995		
	30	3470	4120	4950	5370	5670	6265	6740		
	40			4625	5020	5300	5855	6300		
	50			4625	5020	5300	5855	6300		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION HARVEST

680/85 R 32 173 A8/B TL TRAXION HARVEST

EAN		8714692335495					Section width				665 mm			
Nominal tyre pressure		2,4 bar					Overall diameter				1950 mm			
Tyre construction		Radial					Static loaded radius				875 mm			
Recommended rim width		DW21B					Rolling circumference				5805 mm			
Permitted rim width		DW20B, DW23B					SRI				925			
							Tread depth				44 mm			
							75% of the tyre volume				758 l			
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre (kg)												
Speed (km/h)	10C	5230	5990	6750	7125	7700	8280	8950	9575	9975	10325	10745	11050	
	10L	4615	5285	5955	6290	6795	7305	7900	8450	8805	9110	9480	9750	
	10H	3590	4190	4545	4970	5450	5830	6215	6485	6715	6955			
	25	3725	4345	4710	5160	5650	6050	6450	6725	6965	7215			
	30	3590	4190	4545	4970	5450	5830	6215	6485	6715	6955			
	40			4245	4645	5090	5450	5810	6060	6275	6500			
	50			4245	4645	5090	5450	5810	6060	6275	6500			

For remarks and the explanation of abbreviations, see inside of the last page.

680/85 R 32 179 A8/B TL TRAXION HARVEST

EAN		8714692344886		Section width		670 mm					
Nominal tyre pressure		3,2 bar		Overall diameter		1950 mm					
Tyre construction		Radial		Static loaded radius		875 mm					
Recommended rim width		DW21B		Rolling circumference		5805 mm					
Permitted rim width		DW20B, DW23B		SRI		925					
				Tread depth		44 mm					
				75% of the tyre volume		755 l					
		Tyre pressure (bar)									
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre (kg)									
Speed (km/h)	10C	5990	7125	8280	9575	10325	11050	11665	12510	13175	
	10L	5285	6290	7305	8450	9110	9750	10295	11035	11625	
	10H	4190	4970	5830	6485	6955	7565	8295			
	25	4345	5160	6050	6725	7215	7850	8605			
	30	4190	4970	5830	6485	6955	7565	8295			
	40		4645	5450	6060	6500	7070	7750			
	50		4645	5450	6060	6500	7070	7750			

For remarks and the explanation of abbreviations, see inside of the last page.

HARVESTER TYRES - DRIVE WHEEL

680/85 R 32 CHO 179 A8/B TL TRAXION HARVEST

EAN		8714692344879			Section width		670 mm								
Nominal tyre pressure		3,2 bar			Overall diameter		1950 mm								
Tyre construction		Radial			Static loaded radius		875 mm								
Recommended rim width		DW21B			Rolling circumference		5805 mm								
Permitted rim width		DW20B, DW23B			SRI		925								
					Tread depth		44 mm								
					75% of the tyre volume		755 l								
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre (kg)													
Speed (km/h)	10CHO	6345	7545	8770	10140	10930	11700	12355							
	15CHO	5815	6915	8035	9295	10020	10725	11325							
	25	4345	5160	6050	6725	7215	7850	8605							
	30	4190	4970	5830	6485	6955	7565	8295							
	40		4645	5450	6060	6500	7070	7750							
	50		4645	5450	6060	6500	7070	7750							

For remarks and the explanation of abbreviations, see inside of the last page.

800/65 R 32 172 A8/B TL TRAXION HARVEST

EAN		8714692309656				Section width				770 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				1830 mm			
Tyre construction		Radial				Static loaded radius				835 mm			
Recommended rim width		DW27B				Rolling circumference				5450 mm			
Permitted rim width		DW25B				SRI				875			
						Tread depth				56 mm			
						75% of the tyre volume				747 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10C	5145	5895	6570	7000	7550	8065	8600	9135	9530	9970	10410	10710
	10L	4540	5200	5800	6270	6890	7370	7775	8255	8405	8795	9185	9450
	10H	3530	4120	4530	4995	5395	5830	5950	6245	6505	6740		
	25	3665	4275	4700	5185	5595	6050	6170	6475	6750	6995		
	30	3530	4120	4530	4995	5395	5830	5950	6245	6505	6740		
	40			4235	4670	5040	5450	5560	5835	6080	6300		
	50			4235	4670	5040	5450	5560	5835	6080	6300		

For remarks and the explanation of abbreviations, see inside of the last page.

800/65 R 32 CHO 172 A8/B TL TRAXION HARVEST

EAN				8714692324192				Section width				770 mm							
Nominal tyre pressure				2,4 bar				Overall diameter				1830 mm							
Tyre construction				Radial				Static loaded radius				835 mm							
Recommended rim width				DW27B				Rolling circumference				5450 mm							
Permitted rim width				DW25B				SRI				875							
								Tread depth				56 mm							
								75% of the tyre volume				737 l							
		Tyre pressure (bar)																	
		0,80		1,00		1,20		1,40		1,60		1,80		2,00		2,20		2,40	
		Load capacity per tyre (kg)																	
Speed (km/h)	10CHO	6935	7505	8210	8860	9540	10010	10505	10945	11340									
	15CHO	6355	6880	7525	8125	8745	9175	9630	10035	10395									
	25	4275	4700	5185	5595	6050	6170	6475	6750	6995									
	30	4120	4530	4995	5395	5830	5950	6245	6505	6740									
	40		4235	4670	5040	5450	5560	5835	6080	6300									
	50		4235	4670	5040	5450	5560	5835	6080	6300									

For remarks and the explanation of abbreviations, see inside of the last page.

800/65 R 32 178 A8/B TL TRAXION HARVEST

EAN				8714692336652		Section width				760 mm									
Nominal tyre pressure				3,2 bar		Overall diameter				1840 mm									
Tyre construction				Radial		Static loaded radius				835 mm									
Recommended rim width				DW27B		Rolling circumference				5500 mm									
Permitted rim width				DW25B		SRI				875									
						Tread depth				56 mm									
						75% of the tyre volume				737 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10C	5895	7000	8065	9135	9970	10710	11370	12185	12750									
	10L	5200	6270	7370	8255	8795	9450	10035	10750	11250									
	10H	4120	4995	5830	6245	6740	7375	8025											
	25	4275	5185	6050	6475	6995	7650	8325											
	30	4120	4995	5830	6245	6740	7375	8025											
	40		4670	5450	5835	6300	6890	7500											
	50		4670	5450	5835	6300	6890	7500											

For remarks and the explanation of abbreviations, see inside of the last page.

HARVESTER TYRES - DRIVE WHEEL

800/70 R 32 175 A8/B TL TRAXION HARVEST

EAN		8714692309670				Section width		770 mm					
Nominal tyre pressure		2,4 bar				Overall diameter		1925 mm					
Tyre construction		Radial				Static loaded radius		870 mm					
Recommended rim width		DW27B				Rolling circumference		5700 mm					
Permitted rim width		DW30B				SRI		925					
						Tread depth		56 mm					
						75% of the tyre volume		844 l					
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10C	5660	6480	7305	7710	8330	8960	9685	10360	10790	11170	11620	11730
	10L	4990	5720	6445	6805	7350	7905	8545	9140	9520	9855	10255	10350
	10H	3885	4530	4915	5380	5895	6420	6725	7015	7265	7385		
	25	4030	4700	5100	5580	6115	6660	6975	7275	7535	7660		
	30	3885	4530	4915	5380	5895	6420	6725	7015	7265	7385		
	40			4595	5025	5510	6000	6285	6555	6790	6900		
	50			4595	5025	5510	6000	6285	6555	6790	6900		

For remarks and the explanation of abbreviations, see inside of the last page.

800/70 R 32 CHO 175 A8/B TL TRAXION HARVEST

EAN		8714692324215				Section width		770 mm		
Nominal tyre pressure		2,4 bar				Overall diameter		1925 mm		
Tyre construction		Radial				Static loaded radius		870 mm		
Recommended rim width		DW27B				Rolling circumference		5700 mm		
Permitted rim width		DW30B				SRI		925		
						Tread depth		56 mm		
						75% of the tyre volume		844 l		
		Tyre pressure (bar)								
		0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)								
Speed (km/h)	10CHO	7625	8265	9050	9915	10800	11310	11800	12220	12420
	15CHO	6990	7580	8295	9090	9900	10370	10815	11200	11385
	25	4700	5100	5580	6115	6660	6975	7275	7535	7660
	30	4530	4915	5380	5895	6420	6725	7015	7265	7385
	40		4595	5025	5510	6000	6285	6555	6790	6900
	50		4595	5025	5510	6000	6285	6555	6790	6900

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION HARVEST

800/70 R 32 181 A8/B TL TRAXION HARVEST

EAN		8714692309694				Section width		780 mm		
Nominal tyre pressure		3,2 bar				Overall diameter		1925 mm		
Tyre construction		Radial				Static loaded radius		870 mm		
Recommended rim width		DW27B				Rolling circumference		5700 mm		
Permitted rim width		DW30B				SRI		925		
						Tread depth		56 mm		
						75% of the tyre volume		856 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10C	6480	7710	8960	10360	11170	11730	12620	13530	14025
	10L	5720	6805	7905	9140	9855	10350	11135	11940	12375
	10H	4530	5380	6420	7015	7385	8185	8830		
	25	4700	5580	6660	7275	7660	8490	9160		
	30	4530	5380	6420	7015	7385	8185	8830		
	40			6000	6555	6900	7650	8250		
	50			6000	6555	6900	7650	8250		

For remarks and the explanation of abbreviations, see inside of the last page.

900/60 R 32 176 A8/B TL TRAXION HARVEST

EAN		8714692309717					Section width			835 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			1885 mm			
Tyre construction		Radial					Static loaded radius			850 mm			
Recommended rim width		DW27B					Rolling circumference			5610 mm			
Permitted rim width		DW28B, DW30B					SRI			925			
							Tread depth			56 mm			
							75% of the tyre volume			873 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre (kg)											
Speed (km/h)	10C	5765	6600	7360	7845	8460	9040	9635	10235	10675	11170	11665	12070
	10L	5085	5825	6495	6920	7465	7975	8500	9030	9420	9855	10290	10650
	10H	3955	4615	5000	5465	5900	6205	6665	6995	7290	7595		
	25	4105	4790	5185	5670	6120	6440	6915	7255	7560	7880		
	30	3955	4615	5000	5465	5900	6205	6665	6995	7290	7595		
	40			4670	5110	5515	5800	6230	6535	6815	7100		
	50			4670	5110	5515	5800	6230	6535	6815	7100		

For remarks and the explanation of abbreviations, see inside of the last page.

HARVESTER TYRES - DRIVE WHEEL

900/60 R 32 CHO 176 A8/B TL TRAXION HARVEST

EAN		8714692327629				Section width		835 mm		
Nominal tyre pressure		2,4 bar				Overall diameter		1885 mm		
Tyre construction		Radial				Static loaded radius		850 mm		
Recommended rim width		DW27B				Rolling circumference		5610 mm		
Permitted rim width		DW28B, DW30B				SRI		925		
						Tread depth		56 mm		
						75% of the tyre volume		925 l		
		Tyre pressure (bar)								
		0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre (kg)								
Speed (km/h)	10CHO	7765	8410	9195	9925	10440	11210	11765	12265	12780
	15CHO	7120	7710	8430	9100	9570	10280	10785	11240	11715
	25	4790	5185	5670	6120	6440	6915	7255	7560	7880
	30	4615	5000	5465	5900	6205	6665	6995	7290	7595
	40		4670	5110	5515	5800	6230	6535	6815	7100
	50		4670	5110	5515	5800	6230	6535	6815	7100

For remarks and the explanation of abbreviations, see inside of the last page.

900/60 R 32 181 A8/B TL TRAXION HARVEST

EAN		8714692309731				Section width		835 mm		
Nominal tyre pressure		2,4 bar				Overall diameter		1885 mm		
Tyre construction		Radial				Static loaded radius		850 mm		
Recommended rim width		DW27B				Rolling circumference		5610 mm		
Permitted rim width		DW28B, DW30B				SRI		925		
						Tread depth		56 mm		
						75% of the tyre volume		870 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10C	6600	7845	9040	10235	11170	12070	12740	13650	14025
	10L	5825	6920	7975	9030	9855	10650	11240	12045	12375
	10H	4615	5465	6205	6995	7595	8260	8830		
	25	4790	5670	6440	7255	7880	8570	9160		
	30	4615	5465	6205	6995	7595	8260	8830		
	40		5110	5800	6535	7100	7720	8250		
	50		5110	5800	6535	7100	7720	8250		

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION HARVEST

800/70 R 38 181 D TL TRAXION HARVEST

EAN				8714692344923		Section width			755 mm								
Nominal tyre pressure				2,8 bar		Overall diameter			2050 mm								
Tyre construction				Radial		Static loaded radius			920 mm								
Recommended rim width				DW25B		Rolling circumference			6080 mm								
Permitted rim width				DW27B		SRI			975								
						Tread depth			57 mm								
						75% of the tyre volume			887 l								
		Tyre pressure (bar)															
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,40	
		Load capacity per tyre (kg)															
Speed (km/h)	10C	6950	8270	9610	11110	11980	12565	13745	14025								
	10L	6135	7295	8480	9805	10570	11640	12125	12375								
	10H	5225	6200	7475	8085	8625	9490										
	25	5385	6390	7705	8335	8890	9775										
	30	5225	6200	7475	8085	8625	9490										
	40	4975	5905	7120	7700	8215	9035										
	50	4770	5660	6825	7385	7875	8665										
	65		5390	6500	7030	7500	8250										
70		4905	5915	6400	6825	7510											

For remarks and the explanation of abbreviations, see inside of the last page.

800/70 R 38 CHO 181 D TL TRAXION HARVEST

EAN		8714692344916				Section width				755 mm			
Nominal tyre pressure		2,8 bar				Overall diameter				2050 mm			
Tyre construction		Radial				Static loaded radius				920 mm			
Recommended rim width		DW25B				Rolling circumference				6080 mm			
Permitted rim width		DW27B				SRI				975			
						Tread depth				57 mm			
						75% of the tyre volume				887 l			
		Tyre pressure (bar)											
		0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre (kg)											
Speed (km/h)	10 CHO	8180	8870	9705	10635	11700	12135	12655	13105	13500	14550	14850	
	15 CHO	7495	8130	8900	9750	10725	11120	11605	12015	12375	13340	13615	
	25	5385	5840	6390	7000	7705	7990	8335	8630	8890	9580	9775	
	30	5225	5665	6200	6795	7475	7750	8085	8375	8625	9295	9490	
	40	4975	5395	5905	6470	7120	7380	7700	7975	8215	8855	9035	
	50	4770	5175	5660	6205	6825	7080	7385	7645	7875	8490	8665	
	65		4925	5390	5910	6500	6740	7030	7280	7500	8085	8250	
	70		4485	4905	5375	5915	6135	6400	6625	6825	7355	7510	

For remarks and the explanation of abbreviations, see inside of the last page.

HARVESTER TYRES - DRIVE WHEEL



TRAXION^{OPTIMAL}

THE NEXT GENERATION VF TYRE

FEATURES	BENEFITS
Innovative carcass construction enabling up to 25% lower inflation pressure in the field	7%* higher productivity and 7%* lower fuel consumption 15%** larger footprint for less soil compaction and higher yield
Traxion concept with unique tread compound and high rubber content for 30% better wear resistance	30% longer life***
10% higher radial stiffness**	Maximum stability at heavy road transport

- * According to tests conducted by DLG, compared to premium European IF competitor tyre.
- ** According to measurements by Vredestein testing dept, compared to premium European VF competitor tyre.
- *** According to Vredestein R&D compared to premium European IF and VF competitor tyres.

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
38	VF 650/85 R 38 PFO	182 D	2,0	DW23B	670*	2060*	900*	6105*	17
	VF 800/70 R 38 PFO	187 D	2,0	DW27B	805	2060	900	6100	17
42	VF 650/85 R 42 PFO	183 D	2,0	DW23B	670*	2160*	950*	6395*	18
	VF 710/70 R 42 PFO	182 D	2,0	DW25B	730	2060	910	6110	18
	VF 710/75 R 42 PFO	184 D	2,0	DW25B	730	2160	965	6390	19
	VF 800/70 R 42 PFO	189 D	2,0	DW27B	800	2165	930	6380	19
	VF 900/60 R 42 PFO NRO	189 D	2,0	DW30B	875	2145	920	6315	20

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values

PFO (Pressure Field Operation)

Vredestein Very high Flexion (VF) tractor tyres with the marking Pressure Field Operation (PFO) are in conformity with a new Experimental Standard registered by the European Tyre and Rim Technical Organisation (ETRTO) in 2019. PFO tyres - marked with PFO as a suffix after the size designation - are allowed to be operated at lower inflation pressures at lower speeds (especially in the field) compared to standard VF tyres.



TRAXION^{XXL}

OFFERING HIGHEST EFFICIENCY AND
LONGEST LIFE FOR HIGH HP TRACTORS

FEATURES	BENEFITS
Unique curved cleats and compound properties	Extended lifespan
Dedicated traction and comfort zone	Maximized traction and excellent comfort
Largest volume	High load capacity



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
38	710/70 R 38	166 D	1,6	DW23B	730	1930	870	5760	29
	710/75 R 38	174 D	2,4	DW23B	715	2000	910	5950	30
	800/70 R 38	178 D	2,4	DW25B	825	2065	940	6160	30
	900/60 R 38	178 D	2,4	DW27B	870	2040	925	6100	31
42	710/70 R 42	173 D	2,4	DW23B	730	2060	940	6140	31
	710/75 R 42	175 D	2,4	DW23B	735	2150	980	6395	32

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES - STEERING WHEEL



TRAXION HARVEST

PROVIDING HIGHEST PRODUCTIVITY
WITH MODERN
HARVESTING EQUIPMENT

FEATURES	BENEFITS
Unique curved cleats	High traction, stability & comfort
Strong yet flexible carcass	High load capacity and durability
IMP technology	Maximum soil preservation



TRAXION HARVEST

Ø	Tyre size	Service description	Nominal inflation pressure (bar)						Page
24	460/70 R 24 IMP	163 A8	3,2	W15L	455	1235	555	3745	111
	500/70 R 24 IMP	164 A8	2,8	W15L	480	1305	580	3925	112
	500/85 R 24 IMP	171 A8	2,8	W15L	505	1450	645	4360	112
28	500/80 R 28 IMP	176 A8	3,2	W15L	490	1490	665	4520	113
	600/65 R 28 IMP	168 A8	2,0	DW18L	580	1470	650	4300	113
30	500/85 R 30 IMP	176 A8	2,8	W16L	505	1600	715	4750	114
	620/70 R 30 IMP	178 A8	2,8	DW20B	590	1600	715	4760	114

For the explanation of the symbols and abbreviations, see the inside of the last page.



460/70 R 24 IMP 163 A8 / 151 A8 TL TRAXION HARVEST

EAN		8714692335426			Section width		455 mm	
Nominal tyre pressure		3,2 bar			Overall diameter		1235 mm	
Tyre construction		Radial			Static loaded radius		555 mm	
Recommended rim width		W15L			Rolling circumference		3745 mm	
Permitted rim width		W14L, W16L			SRI		600	
Very important: When these are fitted on a steered axle, see***					Tread depth		34 mm	
					75% tyre volume		169 l	
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)						
Speed (km/h)	10 ➡	2805	3610	4410	5110	5600	6125	6825
	10 ⦿	1965	2525	3050	3605	3920	4305	4830
	25 ➡	2385	3070	3750	4345	4760	5205	5800
	25 ⦿	1670	2145	2595	3065	3330	3660	4105
	30 ➡	2245	2885	3530	4090	4480	4900	5460
	30 ⦿	1570	2020	2440	2885	3135	3445	3865
	40 ➡	2005	2580	3150	3650	4000	4375	4875
	40 ⦿	1405	1805	2180	2575	2800	3075	3450
	50 ➡	1805	2320	2835	3285	3600	3940	4390

For remarks and the explanation of abbreviations, see inside of the last page.

HARVESTER TYRES - STEERING WHEEL

500/70 R 24 IMP 164 A8 / 155 A8 TL TRAXION HARVEST

EAN		8714692335433		Section width		480 mm							
Nominal tyre pressure		2,8 bar		Overall diameter		1305 mm							
Tyre construction		Radial		Static loaded radius		580 mm							
Recommended rim width		W15L		Rolling circumference		3925 mm							
Permitted rim width		W16L		SRI		625							
Very important: When these are fitted on a steered axle, see***				Tread depth		37 mm							
				75% tyre volume		211 l							
		Tyre pressure (bar)											
		0,80		1,20		1,60		2,00		2,40		2,80	
		Load capacity per tyre (kg)											
Speed (km/h)	10 ➡	3200	4115	4970	5775	6475	7000						
	10 ⦿	2480	3190	3920	4550	4970	5425						
	25 ➡	2720	3495	4225	4910	5505	5950						
	25 ⦿	2110	2710	3330	3870	4225	4610						
	30 ➡	2560	3290	3975	4620	5180	5600						
	30 ⦿	1985	2550	3135	3640	3975	4340						
	40 ➡	2285	2940	3550	4125	4625	5000						
	40 ⦿	1770	2275	2800	3250	3550	3875						
50 ➡	2055	2645	3195	3715	4165	4500							

For remarks and the explanation of abbreviations, see inside of the last page.

500/85 R 24 IMP 171 A8 / 158 A8 TL TRAXION HARVEST

EAN		8714692335440		Section width		505 mm	
Nominal tyre pressure		2,8 bar		Overall diameter		1450 mm	
Tyre construction		Radial		Static loaded radius		645 mm	
Recommended rim width		W15L		Rolling circumference		4360 mm	
Permitted rim width		W16L		SRI		700	
Very important: When these are fitted on a steered axle, see***				Tread depth		37 mm	
				75% tyre volume		302 l	
		Tyre pressure (bar)					
		0,80	1,20	1,60	2,00	2,40	2,80
		Load capacity per tyre (kg)					
Speed (km/h)	10 ➡	3830	4925	5950	6650	7630	8610
	10 ⦿	2680	3445	4200	4690	5250	5950
	25 ➡	3255	4185	5060	5655	6485	7320
	25 ⦿	2280	2930	3570	3985	4465	5060
	30 ➡	3065	3940	4760	5320	6105	6890
	30 ⦿	2145	2755	3360	3750	4200	4760
	40 ➡	2735	3515	4250	4750	5450	6150
	40 ⦿	1915	2460	3000	3350	3750	4250
	50 ➡	2460	3165	3825	4275	4905	5535

For remarks and the explanation of abbreviations, see inside of the last page.

500/80 R 28 IMP 176 A8 / 164 A8 TL TRAXION HARVEST

EAN		8714692335457			Section width		490 mm	
Nominal tyre pressure		3,2 bar			Overall diameter		1490 mm	
Tyre construction		Radial			Static loaded radius		665 mm	
Recommended rim width		W15L			Rolling circumference		4520 mm	
Permitted rim width		W16L			SRI		725	
Very important: When these are fitted on a steered axle, see***					Tread depth		37 mm	
					75% tyre volume		283 l	
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)						
Speed (km/h)	10 ➡	3855	4960	6125	7000	8120	9100	9940
	10 ⌚	2740	3520	4305	4970	5775	6475	7000
	25 ➡	3280	4215	5205	5950	6900	7735	8450
	25 ⌚	2330	2995	3660	4225	4910	5505	5950
	30 ➡	3085	3965	4900	5600	6495	7280	7950
	30 ⌚	2190	2815	3445	3975	4620	5180	5600
	40 ➡	2755	3540	4375	5000	5800	6500	7100
	40 ⌚	1955	2515	3075	3550	4125	4625	5000
	50 ➡	2480	3190	3940	4500	5220	5850	6390

For remarks and the explanation of abbreviations, see inside of the last page.

600/65 R 28 IMP 168 A8 / 156 A8 TL TRAXION HARVEST

EAN		8714692335471		Section width		580 mm	
Nominal tyre pressure		2,0 bar		Overall diameter		1470 mm	
Tyre construction		Radial		Static loaded radius		650 mm	
Recommended rim width		DW18L		Rolling circumference		4300 mm	
Permitted rim width		DW16L,W18L		SRI		700	
Very important: When these are fitted on a steered axle, see***				Tread depth		52 mm	
				75% tyre volume		315 l	
		Tyre pressure (bar)					
		0,80		1,20		1,60	
		Load capacity per tyre (kg)					
Speed (km/h)	10 ➡	4255	5475	6650	7840		
	10 ⌚	3085	3970	4830	5600		
	25 ➡	3620	4650	5655	6665		
	25 ⌚	2625	3375	4105	4760		
	30 ➡	3405	4380	5320	6270		
	30 ⌚	2470	3175	3865	4480		
	40 ➡	3040	3910	4750	5600		
	40 ⌚	2205	2835	3450	4000		
50 ➡	2735	3520	4275	5040			

For remarks and the explanation of abbreviations, see inside of the last page.

HARVESTER TYRES - STEERING WHEEL

500/85 R 30 IMP 176 A8 / 164 A8 TL TRAXION HARVEST

EAN	8714692335464	Section width	505 mm				
Nominal tyre pressure	2,8 bar	Overall diameter	1600 mm				
Tyre construction	Radial	Static loaded radius	715 mm				
Recommended rim width	W16L	Rolling circumference	4750 mm				
Permitted rim width	W15L	SRI	775				
Very important: When these are fitted on a steered axle, see***		Tread depth	37 mm				
		75% tyre volume	344 l				
		Tyre pressure (bar)					
		0,80	1,20	1,60	2,00	2,40	2,80
		Load capacity per tyre (kg)					
Speed (km/h)	10 ➡	4195	5395	6650	7630	8820	9940
	10 ⦿	2940	3775	4550	5425	6125	7000
	25 ➡	3565	4585	5655	6485	7495	8450
	25 ⦿	2495	3210	3870	4610	5205	5950
	30 ➡	3355	4315	5320	6105	7055	7950
	30 ⦿	2350	3020	3640	4340	4900	5600
	40 ➡	3000	3855	4750	5450	6300	7100
	40 ⦿	2100	2700	3250	3875	4375	5000
	50 ➡	2700	3470	4275	4905	5670	6390

For remarks and the explanation of abbreviations, see inside of the last page.

620/70 R 30 IMP 178 A8 / 166 A8 TL TRAXION HARVEST

EAN	8714692335488	Section width	590 mm			
Nominal tyre pressure	2,4 bar	Overall diameter	1600 mm			
Tyre construction	Radial	Static loaded radius	715 mm			
Recommended rim width	DW20L	Rolling circumference	4760 mm			
Permitted rim width	DW18L	SRI	775			
Very important: When these are fitted on a steered axle, see***		Tread depth	52 mm			
		75% tyre volume	392 l			
		Tyre pressure (bar)				
		0,80	1,20	1,60	2,00	2,40
		Load capacity per tyre (kg)				
Speed (km/h)	10 ➡	4935	6345	7840	9100	10500
	10 ⦿	3505	4505	5425	6300	7420
	25 ➡	4195	5395	6665	7735	8925
	25 ⦿	2980	3830	4610	5355	6305
	30 ➡	3950	5080	6270	7280	8400
	30 ⦿	2805	3605	4340	5040	5935
	40 ➡	3525	4535	5600	6500	7500
	40 ⦿	2505	3220	3875	4500	5300
	50 ➡	3175	4080	5040	5850	6750

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION HARVEST



HARVESTER TYRES - STEERING WHEEL



TRAXION^{VERSA}

UNBEATABLE ON
SOFT SURFACES

FEATURES	BENEFITS
Large cleat surface in comfort zone	Flat and large contact surface
Extended curved cleats in traction zone	Maximum traction
Reinforced sidewall & stabiliser ring	Maximum damage protection

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
18	340/80 R 18 IND	143 A8/B	4,0	11	355	1000	455	3000	122
20	400/70 R 20 IND	149 A8/B	4,0	13	405	1075	475	3250	122
24	400/70 R 24 IND	152 A8/B	4,0	13	405	1170	535	3510	123
	400/80 R 24 IND	162 A8/B	5,0	DW13	405	1240	570	3740	123
	460/70 R 24 IND	159 A8/B	4,0	DW15L	480	1255	570	3800	124
	500/70 R 24 IND	164 A8/B	4,0	DW16L	515	1320	595	4020	124
26	480/80 R 26 IND	160 A8/B	3,2	DW15L	495	1440	645	4320	125
28	440/80 R 28 IND	156 A8/B	4,0	DW14L	450	1415	640	4270	125

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRAXIONXXL / TRAXION 65



TRAXION^{XXL}

OFFERING HIGHEST EFFICIENCY AND
LONGEST LIFE FOR HIGH HP TRACTORS

FEATURES	BENEFITS
Unique curved cleats and compound properties	Extended lifespan
Dedicated traction and comfort zone	Maximized traction and excellent comfort
Largest volume	High load capacity



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
28	600/65 R 28	154 D	2,4	DW18L	595	1480	670	4405	24
	600/70 R 28	157 D	2,4	DW20B	610	1540	700	4590	25
30	540/65 R 30 ¹	150 D	2,4	DW16L	540	1460	670	4400	41
	600/70 R 30	158 D	2,4	DW20B	630	1590	725	4750	26
	710/60 R 30	162 D	2,4	DW23B	705	1610	730	4800	26

For the explanation of the symbols and abbreviations, see the inside of the last page.

¹ = Traxion 65



ENDURION

THE EFFICIENCY CHAMPION ON HARD SURFACES

High rubber content of
ENDURION ensures longest
service life.

Sophisticated compound and robust
carcass design offer best return on
investment.




VREDESTEIN
YOUR PERFORMANCE TYRES SINCE 1909



AGRI INDUSTRIAL TYRES

SOFT SURFACE

pag.

Traxion Versa

120

HARD SURFACE

Endurion

126



AGRI INDUSTRIAL TYRES FOR SOFT SURFACES



TRAXION^{VERSA}

UNBEATABLE ON
SOFT SURFACES

FEATURES	BENEFITS
Large cleat surface in comfort zone	Flat and large contact surface
Extended curved cleats in traction zone	Maximum traction
Reinforced sidewall & stabiliser ring	Maximum damage protection



TRAXION VERSA

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
18	340/80 R 18 IND	143 A8/B	4,0	11	355	1000	455	3000	122
20	400/70 R 20 IND	149 A8/B	4,0	13	405	1075	475	3250	122
24	400/70 R 24 IND	152 A8/B	4,0	13	405	1170	535	3510	123
	400/80 R 24 IND	162 A8/B	5,0	DW13	405	1240	570	3740	123
	460/70 R 24 IND	159 A8/B	4,0	DW15L	480	1255	570	3800	124
	500/70 R 24 IND	164 A8/B	4,0	DW16L	515	1320	595	4020	124
26	480/80 R 26 IND	160 A8/B	3,2	DW15L	495	1440	645	4320	125
28	440/80 R 28 IND	156 A8/B	3,2	DW14L	450	1415	640	4270	125

For the explanation of the symbols and abbreviations, see the inside of the last page.



AGRI INDUSTRIAL TYRES FOR SOFT SURFACES

340/80 R 18 IND 143 A8/B TL TRAXION VERSA

EAN		8714692335341		Section width		355 mm			
Nominal tyre pressure		4,0 bar		Overall diameter		1000 mm			
Tyre construction		Radial		Static loaded radius		455 mm			
Recommended rim width		11		Rolling circumference		3000 mm			
Permitted rim width		W10, W11,		SRI		475			
		11SDC, 12, 12SC		Tread depth (including tie bar)		32 mm			
Alternative size description(s)		335/80 R 18		Tie bar height		3 mm			
		12.5 R 18		75% of the tyre volume		86 l			
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	2430	2970	3505	4045	4585	5150	5665	6265
	10C	1585	1935	2285	2640	2990	3360	3695	4090
	25	1370	1615	1865	2115	2375	2610	2890	
	30	1340	1585	1830	2075	2330	2560	2835	
	40	1290	1525	1760	1995	2240	2465	2725	
	50	1290	1525	1760	1995	2240	2465	2725	

For remarks and the explanation of abbreviations, see inside of the last page.

400/70 R 20 IND 149 A8/B TL TRAXION VERSA

EAN	8714692309922	Section width	405 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1075 mm						
Tyre construction	Radial	Static loaded radius	475 mm						
Recommended rim width	13	Rolling circumference	3250 mm						
Permitted rim width	12SDC, 13SDC, 14	SRI	525						
Alternative size description(s)	405/70 R 20	Tread depth (including tie bar)	36 mm						
	16.0/70 R 20	Tie bar height	3 mm						
		75% of the tyre volume	115 l						
Tyre pressure (bar)									
1,602,002,402,803,203,604,004,40									
Load capacity per tyre (kg)									
Speed (km/h)	0	2915	3590	4260	4860	5530	6205	6840	7475
	10C	1900	2340	2780	3170	3610	4045	4460	4875
	25	1640	1955	2245	2640	2970	3150	3445	
	30	1610	1920	2205	2590	2910	3095	3380	
	40	1550	1845	2120	2490	2800	2975	3250	
	50	1550	1845	2120	2490	2800	2975	3250	

For remarks and the explanation of abbreviations, see inside of the last page.

400/70 R 24 IND 152 A8/B TL TRAXION VERSA

EAN		8714692335358				Section width			405 mm
Nominal tyre pressure		4,0 bar				Overall diameter			1170 mm
Tyre construction		Radial				Static loaded radius			535 mm
Recommended rim width		13				Rolling circumference			3510 mm
Permitted rim width		12SDC, 13SDC, 14				SRI			575
Alternative size description(s)		405/70 R 24				Tread depth (including tie bar)			35 mm
		16.0/70 R 24				Tie bar height			3 mm
						75% of the tyre volume			124 l
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	3150	3850	4550	5250	5950	6670	7350	8165
	10C	2055	2510	2965	3425	3880	4350	4795	5325
	25	1775	2095	2420	2740	3075	3385	3765	
	30	1740	2055	2375	2690	3015	3325	3690	
	40	1675	1980	2285	2585	2900	3195	3550	
	50	1675	1980	2285	2585	2900	3195	3550	

For remarks and the explanation of abbreviations, see inside of the last page.

400/80 R 24 IND 162 A8/B TL TRAXION VERSA

EAN		8714692335365					Section width		405 mm										
Nominal tyre pressure		5,0 bar					Overall diameter		1240 mm										
Tyre construction		Radial					Static loaded radius		570 mm										
Recommended rim width		DW13					Rolling circumference		3740 mm										
Permitted rim width		13					SRI		600										
Alternative size description(s)		15.5/80 R 24					Tread depth (including tie bar)		39 mm										
							Tie bar height		3 mm										
							75% of the tyre volume		151 l										
		Tyre pressure (bar)																	
		1,60		2,00		2,40		2,80		3,20		3,60		4,00		4,40		5,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	0	3545	4335	5120	5910	6695	7475	8275	9200	10240									
	10C	2310	2825	3340	3855	4365	4875	5395	6000	6680									
	25	1995	2360	2725	3085	3445	3815	4240	4540	5035									
	30	1960	2315	2670	3030	3380	3740	4160	4455	4940									
	40	1885	2225	2570	2910	3250	3595	4000	4280	4750									
	50	1885	2225	2570	2910	3250	3595	4000	4280	4750									

For remarks and the explanation of abbreviations, see inside of the last page.

AGRI INDUSTRIAL TYRES FOR SOFT SURFACES

460/70 R 24 IND 159 A8/B TL TRAXION VERSA

EAN		8714692309946		Section width		480 mm			
Nominal tyre pressure		4,0 bar		Overall diameter		1255 mm			
Tyre construction		Radial		Static loaded radius		570 mm			
Recommended rim width		DW15L		Rolling circumference		3800 mm			
Permitted rim width		DW14L, DW16L		SRI		600			
Alternative size description(s)		17.5 LR 24		Tread depth (including tie bar)		38 mm			
EAN Tube		8714692332685		Tie bar height		3 mm			
				75% of the tyre volume		191 l			
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	3915	4785	5655	6520	7390	8165	9130	10065
	10CI	2550	3120	3685	4255	4820	5325	5955	6565
	25	2205	2605	3005	3405	3765	4210	4640	
	30	2165	2555	2950	3340	3690	4130	4550	
	40	2080	2460	2835	3215	3550	3970	4375	
	50	2080	2460	2835	3215	3550	3970	4375	

For remarks and the explanation of abbreviations, see inside of the last page.

500/70 R 24 IND 164 A8/B TL TRAXION VERSA

EAN		8714692309960			Section width		515 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1320 mm		
Tyre construction		Radial			Static loaded radius		595 mm		
Recommended rim width		DW16L			Rolling circumference		4020 mm		
Permitted rim width		DW15L, DW18L			SRI		625		
Alternative size description(s)		19.5 LR 24			Tread depth (including tie bar)		39 mm		
EAN Tube		8714692332692			Tie bar height		3 mm		
					75% of the tyre volume		234 l		
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	4460	5450	6445	7435	8425	9490	10410	11500
	10CI	2910	3555	4200	4850	5495	6190	6790	7500
	25	2515	2970	3425	3885	4375	4795	5300	
	30	2465	2915	3360	3810	4290	4705	5200	
	40	2370	2800	3230	3665	4125	4525	5000	
	50	2370	2800	3230	3665	4125	4525	5000	

For remarks and the explanation of abbreviations, see inside of the last page.

TRAXION VERSA

480/80 R 26 IND 160 A8/B TL TRAXION VERSA

EAN		8714692309984			Section width		495 mm						
Nominal tyre pressure		3,2 bar			Overall diameter		1440 mm						
Tyre construction		Radial			Static loaded radius		645 mm						
Recommended rim width		DW15L			Rolling circumference		4320 mm						
Permitted rim width		DW16L			SRI		675						
Alternative size description(s)		18.4 R 26			Tread depth (including tie bar)		39 mm						
					Tie bar height		3 mm						
					75% of the tyre volume		273 l						
		Tyre pressure (bar)											
		1,60		2,00		2,40		2,80		3,20		3,60	
		Load capacity per tyre (kg)											
Speed (km/h)	0	4885	5970	7055	8145	9230	10350						
	10C	3185	3895	4605	5310	6020	6750						
	25	2750	3255	3755	4255	4770							
	30	2700	3190	3680	4175	4680							
	40	2595	3070	3540	4015	4500							
	50	2595	3070	3540	4015	4500							

For remarks and the explanation of abbreviations, see inside of the last page.

440/80 R 28 IND 156 A8/B TL TRAXION VERSA

EAN		8714692336416		Section width		450 mm							
Nominal tyre pressure		3,2 bar		Overall diameter		1415 mm							
Tyre construction		Radial		Static loaded radius		640 mm							
Recommended rim width		DW14L		Rolling circumference		4270 mm							
Permitted rim width		DW15L		SRI		675							
Alternative size description(s)		16.9 R 28		Tread depth (including tie bar)		39 mm							
				Tie bar height		3 mm							
				75% of the tyre volume		219 l							
		Tyre pressure (bar)											
		1,60		2,00		2,40		2,80		3,20		3,60	
		Load capacity per tyre (kg)											
Speed (km/h)	0	4405	5380	6360	7340	8315	9200						
	10C	2870	3510	4150	4785	5425	6000						
	25	2480	2930	3380	3835	4240							
	30	2435	2875	3320	3760	4160							
	40	2340	2765	3190	3615	4000							
	50	2340	2765	3190	3615	4000							

For remarks and the explanation of abbreviations, see inside of the last page.

AGRI INDUSTRIAL TYRES FOR HARD SURFACES



ENDURIION

THE EFFICIENCY CHAMPION
ON HARD SURFACES

FEATURES	BENEFITS
High rubber content in profile (44%)	Exceptionally long service life
Broad-based 45-degree cleats	Optimal self-cleaning and traction
Sophisticated compound and robust carcass design	High durability, maximum return on investment



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
18	340/80 R 18 IND	143 A8/B	4,0	11	355	1000	460	3000	128
	400/70 R 18 IND	147 A8/B	4,0	13	410	1015	465	3050	128
20	340/80 R 20 IND	144 A8/B	4,0	11	355	1055	490	3180	129
	400/70 R 20 IND	149 A8/B	4,0	13	405	1070	490	3245	129
24	400/70 R 24 IND	152 A8/B	4,0	13	405	1170	540	3510	130
	400/80 R 24 IND	162 A8/B	5,0	DW13	410	1245	570	3720	130
	460/70 R 24 IND	159 A8/B	4,0	DW15L	480	1265	570	3820	131
	500/70 R 24 IND	164 A8/B	4,0	DW16L	520	1315	595	4000	131
26	480/80 R 26 IND	160 A8/B	3,2	DW15L	495	1440	645	4320	132
28	440/80 R 28 IND	156 A8/B	3,2	DW14L	455	1420	640	4290	132

For the explanation of the symbols and abbreviations, see the inside of the last page.



AGRI INDUSTRIAL TYRES FOR HARD SURFACES

340/80 R 18 IND 143 A8/B TL ENDURION

EAN		8714692335372			Section width		355 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1000 mm		
Tyre construction		Radial			Static loaded radius		460 mm		
Recommended rim width		11			Rolling circumference		3000 mm		
Permitted rim width		W10, W11, 11SDC, 12, 12SC			SRI		475		
Alternative size description(s)		335/80 R 18			Tread depth (including tie bar)		26 mm		
		12.5 R 18			Tie bar height		3 mm		
					75% of the tyre volume		89 l		
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	2430	2970	3505	4045	4585	5150	5665	6265
	10C	1585	1935	2285	2640	2990	3360	3695	4090
	25	1370	1615	1865	2115	2375	2610	2890	
	30	1340	1585	1830	2075	2330	2560	2835	
	40	1290	1525	1760	1995	2240	2465	2725	
	50	1290	1525	1760	1995	2240	2465	2725	

For remarks and the explanation of abbreviations, see inside of the last page.

400/70 R 18 IND 147 A8/B TL ENDURION

EAN		8714692335389			Section width			410 mm									
Nominal tyre pressure		4,0 bar			Overall diameter			1015 mm									
Tyre construction		Radial			Static loaded radius			465 mm									
Recommended rim width		13			Rolling circumference			3050 mm									
Permitted rim width		12SDC, 13SDC, 14			SRI			475									
Alternative size description(s)		405/70 R 18			Tread depth (including tie bar)			25 mm									
		16.0/70 R 18			Tie bar height			3 mm									
					75% of the tyre volume			109 l									
		Tyre pressure (bar)															
		1,60		2,00		2,40		2,80		3,20		3,60		4,00		4,40	
		Load capacity per tyre (kg)															
Speed (km/h)	0	2780	3395	4015	4630	5250	5920	6485	7070								
	10C	1810	2215	2620	3020	3425	3865	4230	4615								
	25	1565	1850	2135	2420	2730	2990	3260									
	30	1535	1815	2095	2375	2680	2930	3200									
	40	1475	1745	2015	2280	2575	2820	3075									
	50	1475	1745	2015	2280	2575	2820	3075									

For remarks and the explanation of abbreviations, see inside of the last page.

340/80 R 20 IND 144 A8/B TL ENDURION

EAN	8714692336584	Section width	355 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1055 mm						
Tyre construction	Radial	Static loaded radius	490 mm						
Recommended rim width	11	Rolling circumference	3180 mm						
Permitted rim width	W10, W11, 11SDC, 12, 12SC	SRI	500						
Alternative size description(s)	335/80 R 20	Tread depth (including tie bar)	26 mm						
	12.5 R 20	Tie bar height	3 mm						
		75% of the tyre volume	96 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	2540	3105	3670	4235	4795	5430	5925	6440
	10C	1655	2025	2390	2760	3130	3540	3865	4200
	25	1430	1690	1950	2210	2500	2730	2970	
	30	1405	1660	1915	2170	2455	2680	2910	
	40	1350	1595	1840	2085	2360	2575	2800	
	50	1350	1595	1840	2085	2360	2575	2800	

For remarks and the explanation of abbreviations, see inside of the last page.

400/70 R 20 IND 149 A8/B TL ENDURION

EAN		8714692335396		Section width		405 mm			
Nominal tyre pressure		4,0 bar		Overall diameter		1070 mm			
Tyre construction		Radial		Static loaded radius		490 mm			
Recommended rim width		13		Rolling circumference		3245 mm			
Permitted rim width		12SDC, 13SDC, 14		SRI		525			
Alternative size description(s)		405/70 R 20		Tread depth (including tie bar)		25 mm			
		16.0/70 R 20		Tie bar height		3 mm			
				75% of the tyre volume		116 l			
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	2905	3550	4195	4840	5485	6095	6780	7475
	10C	1895	2315	2735	3160	3580	3975	4420	4875
	25	1635	1935	2230	2530	2810	3125	3445	
	30	1605	1895	2190	2480	2755	3065	3380	
	40	1545	1825	2105	2385	2650	2945	3250	
	50	1545	1825	2105	2385	2650	2945	3250	

For remarks and the explanation of abbreviations, see inside of the last page.

AGRI INDUSTRIAL TYRES FOR HARD SURFACES

400/70 R 24 IND 152 A8/B TL ENDURION

EAN		8714692335402			Section width		405 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1170 mm		
Tyre construction		Radial			Static loaded radius		540 mm		
Recommended rim width		13			Rolling circumference		3510 mm		
Permitted rim width		W10, W11,			SRI		500		
		12SDC, 13SDC, 14			Tread depth (including tie bar)		25 mm		
Alternative size description(s)		405/70 R 24			Tie bar height		3 mm		
		16.0/70 R 24			75% of the tyre volume		130 l		
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	3150	3850	4550	5250	5950	6670	7350	8165
	10C	2055	2510	2965	3425	3880	4350	4795	5325
	25	1775	2095	2420	2740	3075	3385	3765	
	30	1740	2055	2375	2690	3015	3325	3690	
	40	1675	1980	2285	2585	2900	3195	3550	
	50	1675	1980	2285	2585	2900	3195	3550	

For remarks and the explanation of abbreviations, see inside of the last page.

400/80 R 24 IND 162 A8/B TL ENDURION

EAN		8714692335419				Section width		410 mm		
Nominal tyre pressure		5,0 bar				Overall diameter		1245 mm		
Tyre construction		Radial				Static loaded radius		570 mm		
Recommended rim width		DW13				Rolling circumference		3720 mm		
Permitted rim width		13				SRI		600		
Alternative size description(s)		15.5/80 R 24				Tread depth (including tie bar)		30 mm		
						Tie bar height		3 mm		
						75% of the tyre volume		158 l		
		Tyre pressure (bar)								
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	5,00
		Load capacity per tyre (kg)								
Speed (km/h)	0	3545	4335	5120	5910	6695	7475	8275	9200	10240
	10C	2310	2825	3340	3855	4365	4875	5395	6000	6680
	25	1995	2360	2725	3085	3445	3815	4240	4540	5035
	30	1960	2315	2670	3030	3380	3740	4160	4455	4940
	40	1885	2225	2570	2910	3250	3595	4000	4280	4750
	50	1885	2225	2570	2910	3250	3595	4000	4280	4750

For remarks and the explanation of abbreviations, see inside of the last page.

460/70 R 24 IND 159 A8/B TL ENDURION

EAN	8714692310003	Section width	480 mm
Nominal tyre pressure	4,0 bar	Overall diameter	1265 mm
Tyre construction	Radial	Static loaded radius	570 mm
Recommended rim width	DW15L	Rolling circumference	3820 mm
Permitted rim width	DW14L, DW16L	SRI	600
Alternative size description(s)	17.5 LR 24	Tread depth (including tie bar)	30 mm
EAN Tube	8714692332685	Tie bar height	3 mm
		75% of the tyre volume	199 l
		Tyre pressure (bar)	
		1,60	2,00 2,40 2,80 3,20 3,60 4,00 4,40
		Load capacity per tyre (kg)	
Speed (km/h)	0	3915	4785 5655 6520 7390 8165 9130 10065
	10C	2550	3120 3685 4255 4820 5325 5955 6565
	25	2205	2605 3005 3405 3765 4210 4640
	30	2165	2555 2950 3340 3690 4130 4550
	40	2080	2460 2835 3215 3550 3970 4375
	50	2080	2460 2835 3215 3550 3970 4375

For remarks and the explanation of abbreviations, see inside of the last page.

500/70 R 24 IND 164 A8/B TL ENDURION

EAN	8714692310027	Section width	520 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1315 mm						
Tyre construction	Radial	Static loaded radius	595 mm						
Recommended rim width	DW16L	Rolling circumference	4000 mm						
Permitted rim width	DW15L, DW18L	SRI	625						
Alternative size description(s)	19.5 LR 24	Tread depth (including tie bar)	30 mm						
EAN Tube	8714692332692	Tie bar height	3 mm						
		75% of the tyre volume	246 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre (kg)							
Speed (km/h)	0	4460	5450	6445	7435	8425	9490	10410	11500
	10C	2910	3555	4200	4850	5495	6190	6790	7500
	25	2515	2970	3425	3885	4375	4795	5300	
	30	2465	2915	3360	3810	4290	4705	5200	
	40	2370	2800	3230	3665	4125	4525	5000	
	50	2370	2800	3230	3665	4125	4525	5000	

For remarks and the explanation of abbreviations, see inside of the last page.

AGRI INDUSTRIAL TYRES FOR HARD SURFACES

480/80 R 26 IND 160 A8/B TL ENDURION													
EAN		8714692310041		Section width		495 mm							
Nominal tyre pressure		3,2 bar		Overall diameter		1440 mm							
Tyre construction		Radial		Static loaded radius		645 mm							
Recommended rim width		DW15L		Rolling circumference		4320 mm							
Permitted rim width		DW16L		SRI		675							
Alternative size description(s)		18.4 R 26		Tread depth (including tie bar)		30 mm							
				Tie bar height		3 mm							
				75% of the tyre volume		283 l							
		Tyre pressure (bar)											
		1,60		2,00		2,40		2,80		3,20		3,60	
		Load capacity per tyre (kg)											
Speed (km/h)	0	4885	5970	7055	8145	9230	10350						
	10Ci	3185	3895	4605	5310	6020	6750						
	25	2750	3255	3755	4255	4770							
	30	2700	3190	3680	4175	4680							
	40	2595	3070	3540	4015	4500							
	50	2595	3070	3540	4015	4500							

For remarks and the explanation of abbreviations, see inside of the last page.

440/80 R 28 IND 156 A8/B TL ENDURION													
EAN		8714692310065		Section width		455 mm							
Nominal tyre pressure		3,2 bar		Overall diameter		1420 mm							
Tyre construction		Radial		Static loaded radius		640 mm							
Recommended rim width		DW14L		Rolling circumference		4290 mm							
Permitted rim width		DW13L, DW15L		SRI		675							
Alternative size description(s)		16.9 R 28		Tread depth (including tie bar)		30 mm							
				Tie bar height		3 mm							
				75% of the tyre volume		238 l							
		Tyre pressure (bar)											
		1,60		2,00		2,40		2,80		3,20		3,60	
		Load capacity per tyre (kg)											
Speed (km/h)	0	4405	5380	6360	7340	8315	9200						
	10Ci	2870	3510	4150	4785	5425	6000						
	25	2480	2930	3380	3835	4240							
	30	2435	2875	3320	3760	4160							
	40	2340	2765	3190	3615	4000							
	50	2340	2765	3190	3615	4000							

For remarks and the explanation of abbreviations, see inside of the last page.





FLOTATION TRAC

THE ALL ROUND FLOTATION TYRE FOR MAXIMUM SOIL PRESERVATION

Special carcass construction of **FLOTATION TRAC** allows low inflation pressure, preserving soil and maximizing yield.

Tread design is optimized to keep rolling even under the most difficult conditions.



REDESTEIN
YOUR PERFORMANCE TYRES SINCE 1909



TRAILER AND IMPLEMENT TYRES

	pag.
Radial implement tyre conversion table	136
RADIAL	
Flotation Trac	138
Flotation Pro	158
BIAS	
Flotation+	168
A.W.	180
A.S.	190
V61	194



RADIAL IMPLEMENT TYRE CONVERSION TABLE

		Section width (mm)													
		480	500	520	560	580	600	620	650	680	710	750	800	850	900
Diameter (mm)	860	480/45 R 17													
	960			520/50 R 17											
	1030		500/45 R 22.5												
	1070				560/45 R 22.5 560/45 R 22.5			620/40 R 22.5	650/40 R 22.5						
	1150			520/55 R 22.5			600/50 R 22.5	620/50 R 22.5			710/40 R 22.5 710/40 R 22.5				
	1250				560/60 R 22.5 560/60 R 22.5				650/50 R 22.5	680/50 R 22.5	710/45 R 22.5		800/40 R 22.5		
	1300					580/65 R 22.5									
	1360						600/55 R 26.5	620/55 R 26.5	650/55 R 26.5		710/50 R 26.5 710/50 R 26.5	750/45 R 26.5	800/45 R 26.5 800/45 R 26.5		
	1500						600/60 R 30.5		650/65 R 26.5		710/50 R 30.5		800/45 R 30.5		
	1550										710/65 R 26				
	1650								650/65 R 30.5			750/60 R 30.5		850/50 R 30.5	
	1800												800/60 R 32		
	1980														900/65 R 32
	2150														900/65 R 38

FLotation
TRAC

FLotation
PRO

NEW
ADDITION

Today there is an ever increasing range of large capacity machinery that is setting the tone for professional farming. The increased weight of these machines, means that soil compaction and the resulting structural soil damage represents a serious threat to achieving the best results. Vredestein tyres can make a substantial contribution to solving such problems. As agriculture has increased in scale, these tyres have been developed with special emphasis given to the extra demands being placed on both fieldwork and transportation.

TRAILER AND IMPLEMENT TYRES

High load capacity and low rolling resistance

The Vredestein range consists of the Vredestein **Flotation Trac**, **Flotation Pro**, **Flotation+**, **A.W.**, **A.S.** and **V61** implement tyres. All six are the result of the very latest developments in the field of agricultural machinery and tyre construction. Providing first-class performance, the tyres combine a high load capacity with a relatively low tyre pressure. In addition, they offer a large contact surface with a low rolling resistance. Each of these agricultural tyres is exceptionally safe when used at relatively high speeds and are guaranteed to have a long lifespan.

Unique tread profile

The tread profile of the Flotation Trac is immediately recognisable by the stable central section with the open shoulder profiling for extra comfort, long life and low rolling resistance. What is more, the unique tread profile ensures perfect self-cleaning characteristics. Yet another important characteristic of the Flotation Trac is the flat tread contour with the rounded shoulders, giving optimal load distribution across the contact surface. By spreading the load evenly, the Flotation Trac ensures minimal rutting and so the soil structure is preserved as far as possible.

Open shoulder profiling



- Good self-cleaning
- Turf preservation
- Traction

Stable central section

- High comfort
- Long life-span
- Low rolling resistance

Fuel saving with radial tyres

Radial implement tyres have a lower rolling resistance, so less traction power is needed and fuel savings of as much as 15% can be achieved.

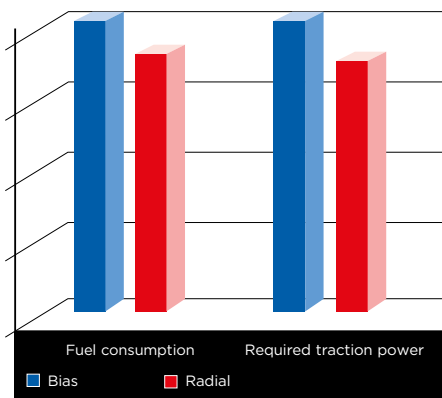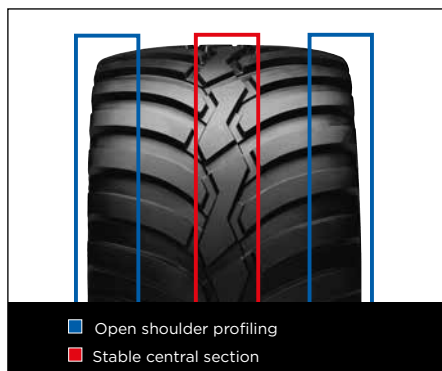

IMPLEMENT RADIAL



FLOTATION ^{TRAC}

THE ALL ROUND FLOTATION TYRE FOR
MAXIMUM SOIL PROTECTION

FEATURES	BENEFITS
Stable central tread and rounded shoulders	Keeps rolling even in the most difficult conditions
Highly flexible carcass & sturdy belt design	Optimized footprint under varying inflation pressures
Robust bead construction	High degree of reliability



FLOTATION TRAC

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page	
17	480/45 R 17 IMP	140 D	4,0	16.00	480*	860*	390*	2645*	140	N
	520/50 R 17 IMP	141 D	3,2	16.00	505	965	445	2970	140	
	520/50 R 17 IMP	147 D	4,0	16.00	505	965	445	2970	141	
22.5	500/45 R 22.5 IMP	136 D	2,8	AG 16.00	500*	1030*	470*	3165*	141	N
	520/55 R 22.5 IMP	148 D	3,2	AG 16.00	515	1155	530	3560	142	
	520/55 R 22.5 IMP	154 D	4,0	AG 16.00	515	1155	530	3560	142	
	560/45 R 22.5 IMP	152 D	4,0	AG 16.00	545	1085	490	3295	143	
	560/45 R 22.5 IMP	160 D	6,0	AG 16.00	530	1080	500	3350	143	
	560/60 R 22.5 IMP	161 D	4,0	AG 16.00	550	1245	560	3820	144	
	560/60 R 22.5 IMP	165 D	5,0	AG 16.00	550	1245	560	3820	144	
	580/65 R 22.5 IMP	166 D	4,0	AG 18.00	585	1300	585	3985	145	
	600/50 R 22.5 IMP	159 D	4,0	AG 20.00	600	1170	530	3615	145	
	650/40 R 22.5 IMP	150 D	3,2	AG 20.00	635	1080	495	3360	146	
	650/40 R 22.5 IMP	156 D	4,0	AG 20.00	635	1080	495	3360	146	
	680/50 R 22.5 IMP	156 D	2,8	AG 20.00	670	1260	565	3880	147	
	680/50 R 22.5 IMP	166 D	4,0	AG 20.00	670	1260	565	3880	147	
	710/40 R 22.5 IMP	161 D	4,0	AG 24.00	700	1140	515	3470	148	
	710/45 R 22.5 IMP	165 D	4,0	AG 24.00	730	1230	570	3780	148	
	800/40 R 22.5 IMP	168 D	4,0	AG 28.00	790	1220	550	3700	149	
26	710/65 R 26 IMP	179 D	4,0	DW 25B	735	1565	715	4855	149	
26.5	600/55 R 26.5 IMP	165 D	4,0	AG 20.00	620	1350	625	4170	150	
	650/55 R 26.5 IMP	169 D	4,0	AG 20.00	650	1400	635	4300	150	
	650/65 R 26.5 IMP	174 D	4,0	AG 20.00	660	1520	700	4680	151	
	710/50 R 26.5 IMP	170 D	4,0	AG 24.00	725	1380	635	4265	151	
	750/45 R 26.5 IMP	170 D	4,0	AG 24.00	740	1365	620	4180	152	
	800/45 R 26.5 IMP	174 D	4,0	AG 28.00	800	1380	640	4300	152	
30.5	600/60 R 30.5 IMP	169 D	4,0	AG 20.00	610	1505	710	4675	153	
	650/65 R 30.5 IMP	176 D	4,0	AG 20.00	645	1635	755	5075	153	
	710/50 R 30.5 IMP	173 D	4,0	AG 24.00	730	1495	680	4530	154	
	750/60 R 30.5 IMP	181 D	4,0	AG 24.00	785	1675	775	5075	154	
	800/45 R 30.5 IMP	176 D	4,0	AG 28.00	810	1510	700	4710	155	
	850/50 R 30.5 IMP	182 D	4,0	AG 28.00	870	1655	725	4910	155	
32	800/60 R 32 IMP	185 D	4,0	DW 27B	810	1795	810	5550	156	
	900/65 R 32 IMP	188 D	3,2	DW30B	910*	1980*	895*	6120*	156	N
38	900/65 R 38 IMP	191 D	3,2	DW30B	910*	2130*	960*	6585*	157	N

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values

IMPLEMENT RADIAL

480/45 R 17 IMP 140 D TL FLOTATION TRAC

EAN		8714692360435				Section width				480 mm
Nominal tyre pressure		4,0 bar				Overall diameter				860 mm
Tyre construction		Radial				Static loaded radius				390 mm
Recommended rim width		16.00				Rolling circumference				2645 mm
						SRI				410
						Tread depth				23 mm
						Tie bar height				8 mm
						75% tyre volume				88 l
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	1430	1955	2315	2655	3015	3365	3710	4085	4500
	25	1255	1715	2035	2330	2645	2950	3255	3585	3950
	30	1200	1640	1945	2225	2530	2820	3110	3430	3775
	40	1080	1475	1750	2005	2280	2540	2800	3090	3400
	50	960	1315	1555	1785	2025	2260	2495	2745	3025
	65	795	1085	1285	1475	1675	1870	2060	2270	2500
	70	725	985	1170	1340	1525	1700	1875	2065	2275

For remarks and the explanation of abbreviations, see inside of the last page.

520/50 R 17 IMP 141 D TL FLOTATION TRAC

EAN		8714692291586			Section width		505 mm
Nominal tyre pressure		3,2 bar			Overall diameter		965 mm
Tyre construction		Radial			Static loaded radius		445 mm
Recommended rim width		16.00			Rolling circumference		2970 mm
					SRI		450
					Tread depth		17 mm
					Tie bar height		6 mm
					75% tyre volume		133 l
		Tyre pressure (bar)					
		1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)					
Speed (km/h)	10	2435	2890	3310	3760	4195	4635
	25	2135	2535	2905	3300	3680	4070
	30	2045	2425	2775	3155	3520	3890
	40	1840	2180	2500	2840	3170	3500
	50	1635	1940	2225	2525	2820	3115
	65	1355	1605	1840	2090	2330	2575
	70	1230	1460	1675	1900	2120	2345

For remarks and the explanation of abbreviations, see inside of the last page.

520/50 R 17 IMP 147 D TL FLOTATION TRAC

EAN				8714692291593	Section width				505 mm
Nominal tyre pressure				4,0 bar	Overall diameter				965 mm
Tyre construction				Radial	Static loaded radius				445 mm
Recommended rim width				16.00	Rolling circumference				2970 mm
					SRI				450
					Tread depth				17 mm
					Tie bar height				6 mm
					75% tyre volume				133 l
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	2435	2890	3310	3760	4195	4635	5095	5535
	25	2135	2535	2905	3300	3680	4070	4475	4860
	30	2045	2425	2775	3155	3520	3890	4275	4645
	40	1840	2180	2500	2840	3170	3500	3850	4180
	50	1635	1940	2225	2525	2820	3115	3425	3720
	65	1355	1605	1840	2090	2330	2575	2830	3075
	70	1230	1460	1675	1900	2120	2345	2575	2800

For remarks and the explanation of abbreviations, see inside of the last page.

500/45 R 22.5 IMP 136 D TL FLOTATION TRAC

EAN		8714692360442			Section width		500* mm						
Nominal tyre pressure		2,8 bar			Overall diameter		1030* mm						
Tyre construction		Radial			Static loaded radius		460* mm						
Recommended rim width		16.00			Rolling circumference		3110* mm						
					SRI		500						
					Tread depth		23 mm						
					Tie bar height		8 mm						
					75% tyre volume		127 l						
		Tyre pressure (bar)											
		0,80		1,20		1,60		2,00		2,40		2,80	
		Load capacity per tyre (kg)											
Speed (km/h)	10	1730	2365	2805	3215	3710	4030						
	25	1520	2075	2465	2825	3260	3540						
	30	1455	1985	2355	2700	3115	3380						
	40	1310	1790	2120	2430	2805	3045						
	50	1165	1590	1885	2160	2495	2710						
	65	960	1315	1560	1785	2060	2240						
	70	875	1195	1420	1625	1875	2040						

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

IMPLEMENT RADIAL

520/55 R 22.5 IMP 148 D TL FLOTATION TRAC

EAN		8714692291609			Section width		515 mm	
Nominal tyre pressure		3,2 bar			Overall diameter		1155 mm	
Tyre construction		Radial			Static loaded radius		530 mm	
Recommended rim width		AG 16.00			Rolling circumference		3560 mm	
					SRI		575	
					Tread depth		17 mm	
					Tie bar height		6 mm	
					75% tyre volume		193 l	
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)						
Speed (km/h)	10	2190	2995	3550	4070	4625	5155	5670
	25	1925	2630	3120	3575	4060	4525	4975
	30	1840	2510	2980	3415	3880	4325	4755
	40	1655	2260	2685	3075	3495	3895	4285
	50	1475	2015	2385	2735	3110	3465	3810
	65	1220	1665	1975	2260	2570	2865	3150
	70	1110	1515	1795	2060	2335	2605	2865

For remarks and the explanation of abbreviations, see inside of the last page.

520/55 R 22.5 IMP 154 D TL FLOTATION TRAC

EAN				8714692291616		Section width				515 mm									
Nominal tyre pressure				4,0 bar		Overall diameter				1155 mm									
Tyre construction				Radial		Static loaded radius				530 mm									
Recommended rim width				AG 16.00		Rolling circumference				3560 mm									
						SRI				575									
						Tread depth				17 mm									
						Tie bar height				6 mm									
						75% tyre volume				193 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10	2190	2995	3550	4070	4625	5155	5670	6265	6750									
	25	1925	2630	3120	3575	4060	4525	4975	5500	5925									
	30	1840	2510	2980	3415	3880	4325	4755	5255	5665									
	40	1655	2260	2685	3075	3495	3895	4285	4735	5100									
	50	1475	2015	2385	2735	3110	3465	3810	4215	4540									
	65	1220	1665	1975	2260	2570	2865	3150	3480	3750									
	70	1110	1515	1795	2060	2335	2605	2865	3170	3415									

For remarks and the explanation of abbreviations, see inside of the last page.

560/45 R 22.5 IMP 152 D TL FLOTATION TRAC

EAN				8714692335532		Section width				545 mm										
Nominal tyre pressure				4,0 bar		Overall diameter				1085 mm										
Tyre construction				Radial		Static loaded radius				490 mm										
Recommended rim width				AG 16.00		Rolling circumference				3295 mm										
						SRI				525										
						Tread depth				23 mm										
						Tie bar height				8 mm										
						75% tyre volume				154 l										
		Tyre pressure (bar)																		
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00		
		Load capacity per tyre (kg)																		
Speed (km/h)	10	2060	2815	3340	3825	4345	4845	5400	5890	6390										
	25	1810	2470	2930	3360	3815	4255	4740	5170	5610										
	30	1730	2360	2800	3210	3645	4065	4530	4940	5360										
	40	1555	2125	2520	2890	3285	3660	4080	4450	4830										
	50	1385	1890	2245	2570	2920	3260	3630	3960	4295										
	65	1145	1565	1855	2125	2415	2695	3000	3270	3550										
	70	1040	1425	1690	1935	2195	2450	2730	2980	3230										

For remarks and the explanation of abbreviations, see inside of the last page.

560/45 R 22.5 IMP 160 D TL FLOTATION TRAC

EAN				8714692350634				Section width				545 mm			
Nominal tyre pressure				6,0 bar				Overall diameter				1085 mm			
Tyre construction				Radial				Static loaded radius				490 mm			
Recommended rim width				AG 16.00				Rolling circumference				3295 mm			
								SRI				525			
								Tread depth				23 mm			
								Tie bar height				8 mm			
								75% tyre volume				154 l			
		Tyre pressure (bar)													
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,20	5,60	6,00		
		Load capacity per tyre (kg)													
Speed (km/h)	10	3235	3755	4305	4845	5400	5890	6390	6715	7050	7200	7810	8100		
	25	2840	3295	3780	4255	4740	5170	5610	5895	6190	6320	6855	7110		
	30	2715	3150	3610	4065	4530	4940	5360	5630	5915	6040	6555	6795		
	40	2445	2835	3250	3660	4080	4450	4830	5070	5330	5440	5900	6120		
	50	2175	2525	2895	3260	3630	3960	4295	4515	4740	4840	5250	5445		
	65	1800	2085	2390	2695	3000	3270	3550	3730	3920	4000	4340	4500		
	70	1635	1900	2175	2450	2730	2980	3230	3395	3565	3640	3950	4095		

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

560/60 R 22.5 IMP 161 D TL FLOTATION TRAC

EAN		8714692291623		Section width		550 mm				
Nominal tyre pressure		4,0 bar		Overall diameter		1245 mm				
Tyre construction		Radial		Static loaded radius		560 mm				
Recommended rim width		AG 16.00		Rolling circumference		3820 mm				
				SRI		600				
Tube EAN		8714692285044		Tread depth		19 mm				
				Tie bar height		7 mm				
				75% tyre volume		251 l				
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	2660	3635	4315	4945	5615	6265	6975	7615	8325
	25	2335	3195	3785	4340	4930	5500	6125	6680	7310
	30	2235	3050	3620	4150	4710	5255	5850	6385	6985
	40	2010	2750	3260	3735	4245	4735	5270	5750	6290
	50	1790	2445	2900	3325	3775	4210	4690	5120	5595
	65	1480	2020	2395	2745	3120	3480	3875	4230	4625
	70	1345	1840	2180	2500	2840	3165	3525	3850	4210

For remarks and the explanation of abbreviations, see inside of the last page.

560/60 R 22.5 IMP 165 D TL FLOTATION TRAC

EAN		8714692342653				Section width		550 mm				
Nominal tyre pressure		5,0 bar				Overall diameter		1245 mm				
Tyre construction		Radial				Static loaded radius		560 mm				
Recommended rim width		AG 16.00				Rolling circumference		3820 mm				
						SRI		600				
Tube EAN		8714692285044				Tread depth		19 mm				
						Tie bar height		7 mm				
						75% tyre volume		251 l				
		Tyre pressure (bar)										
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00
		Load capacity per tyre (kg)										
Speed (km/h)	10	3425	4185	4850	5565	6265	6975	7615	8325	8675	9115	9270
	25	3005	3670	4260	4885	5500	6125	6680	7310	7615	8000	8135
	30	2870	3510	4070	4665	5255	5850	6385	6985	7280	7645	7775
	40	2585	3160	3665	4205	4735	5270	5750	6290	6555	6885	7005
	50	2300	2810	3260	3740	4210	4690	5120	5595	5835	6125	6230
	65	1900	2325	2695	3090	3480	3875	4230	4625	4820	5065	5150
	70	1730	2115	2455	2810	3165	3525	3850	4210	4385	4610	4685

For remarks and the explanation of abbreviations, see inside of the last page.

580/65 R 22.5 IMP 166 D TL FLOTATION TRAC

EAN				8714692186622			Section width				585 mm								
Nominal tyre pressure				4,0 bar			Overall diameter				1300 mm								
Tyre construction				Radial			Static loaded radius				585 mm								
Recommended rim width				AG 18.00			Rolling circumference				3985 mm								
Permitted rim width				AG 16.00			SRI				625								
							Tread depth				23 mm								
							Tie bar height				6 mm								
							75% tyre volume				310 l								
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10	3075	4200	4980	5705	6480	7230	7950	8785	9540									
	25	2695	3685	4370	5010	5690	6345	6980	7710	8375									
	30	2580	3520	4175	4785	5435	6065	6670	7370	8005									
	40	2320	3170	3760	4310	4895	5460	6005	6640	7210									
	50	2065	2820	3345	3835	4355	4860	5345	5905	6415									
	65	1705	2330	2765	3170	3600	4015	4415	4880	5300									
	70	1555	2120	2515	2885	3275	3655	4020	4440	4825									

For remarks and the explanation of abbreviations, see inside of the last page.

600/50 R 22.5 IMP 159 D TL FLOTATION TRAC

EAN				8714692335549		Section width				600 mm									
Nominal tyre pressure				4,0 bar		Overall diameter				1170 mm									
Tyre construction				Radial		Static loaded radius				530 mm									
Recommended rim width				AG 20.00		Rolling circumference				3615 mm									
						SRI				550									
						Tread depth				23 mm									
						Tie bar height				6 mm									
						75% tyre volume				226 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10	2515	3435	4075	4675	5305	5920	6570	7195	7875									
	25	2210	3015	3580	4100	4660	5195	5765	6315	6915									
	30	2110	2885	3420	3920	4450	4965	5510	6035	6605									
	40	1900	2595	3080	3530	4010	4475	4965	5435	5950									
	50	1690	2310	2740	3140	3570	3980	4415	4835	5295									
	65	1400	1910	2265	2595	2950	3290	3650	3995	4375									
	70	1270	1740	2060	2360	2685	2995	3320	3635	3980									

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

650/40 R 22.5 IMP 150 D TL FLOTATION TRAC

EAN		8714692291524			Section width		635 mm	
Nominal tyre pressure		3,2 bar			Overall diameter		1080 mm	
Tyre construction		Radial			Static loaded radius		495 mm	
Recommended rim width		AG 20.00			Rolling circumference		3360 mm	
					SRI		525	
					Tread depth		21 mm	
					Tie bar height		8 mm	
					75% tyre volume		191 l	
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)						
Speed (km/h)	10	2340	3195	3790	4340	4930	5500	6030
	25	2050	2805	3325	3810	4330	4830	5295
	30	1960	2680	3180	3645	4135	4615	5060
	40	1765	2415	2865	3280	3725	4155	4555
	50	1570	2145	2545	2920	3315	3700	4055
	65	1300	1775	2105	2410	2740	3055	3350
	70	1180	1615	1915	2195	2495	2780	3050

For remarks and the explanation of abbreviations, see inside of the last page.

650/40 R 22.5 IMP 156 D TL FLOTATION TRAC

EAN		8714692291531		Section width		635 mm				
Nominal tyre pressure		4,0 bar		Overall diameter		1080 mm				
Tyre construction		Radial		Static loaded radius		495 mm				
Recommended rim width		AG 20.00		Rolling circumference		3360 mm				
				SRI		525				
				Tread depth		21 mm				
				Tie bar height		8 mm				
				75% tyre volume		191 l				
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	2340	3195	3790	4340	4930	5500	6050	6685	7200
	25	2050	2805	3325	3810	4330	4830	5310	5870	6320
	30	1960	2680	3180	3645	4135	4615	5075	5610	6040
	40	1765	2415	2865	3280	3725	4155	4570	5050	5440
	50	1570	2145	2545	2920	3315	3700	4065	4495	4840
	65	1300	1775	2105	2410	2740	3055	3360	3715	4000
	70	1180	1615	1915	2195	2495	2780	3060	3380	3640

For remarks and the explanation of abbreviations, see inside of the last page.

FLOTATION TRAC

680/50 R 22.5 IMP 156 D TL FLOTATION TRAC

EAN		8714692335556			Section width		670 mm
Nominal tyre pressure		2,8 bar			Overall diameter		1260 mm
Tyre construction		Radial			Static loaded radius		565 mm
Recommended rim width		AG 20.00			Rolling circumference		3880 mm
					SRI		600
					Tread depth		23 mm
					Tie bar height		8 mm
					75% tyre volume		319 l
		Tyre pressure (bar)					
		0,80	1,20	1,60	2,00	2,40	2,80
		Load capacity per tyre (kg)					
Speed (km/h)	10	3065	4185	4965	5690	6565	7200
	25	2690	3675	4355	4995	5760	6320
	30	2570	3510	4165	4770	5505	6040
	40	2315	3160	3750	4300	4960	5440
	50	2060	2815	3335	3825	4415	4840
	65	1700	2325	2760	3160	3645	4000
	70	1550	2115	2510	2875	3320	3640

For remarks and the explanation of abbreviations, see inside of the last page.

680/50 R 22.5 IMP 166 D TL FLOTATION TRAC

EAN				8714692335563		Section width				670 mm									
Nominal tyre pressure				4,0 bar		Overall diameter				1260 mm									
Tyre construction				Radial		Static loaded radius				565 mm									
Recommended rim width				AG 20.00		Rolling circumference				3880 mm									
						SRI				600									
						Tread depth				23 mm									
						Tie bar height				8 mm									
						75% tyre volume				319 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10	3065	4185	4965	5690	6565	7200	7925	8760	9540									
	25	2690	3675	4355	4995	5760	6320	6955	7690	8375									
	30	2570	3510	4165	4770	5505	6040	6650	7350	8005									
	40	2315	3160	3750	4300	4960	5440	5990	6620	7210									
	50	2060	2815	3335	3825	4415	4840	5325	5890	6415									
	65	1700	2325	2760	3160	3645	4000	4405	4865	5300									
	70	1550	2115	2510	2875	3320	3640	4005	4430	4825									

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

710/40 R 22.5 IMP 161 D TL FLOTATION TRAC

EAN		8714692335570				Section width		700 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1140 mm		
Tyre construction		Radial				Static loaded radius		515 mm		
Recommended rim width		AG 24.00				Rolling circumference		3470 mm		
						SRI		550		
						Tread depth		23 mm		
						Tie bar height		8 mm		
						75% tyre volume		253 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	2680	3660	4345	4980	5655	6305	6975	7665	8325
	25	2355	3215	3815	4370	4965	5535	6125	6730	7310
	30	2250	3070	3645	4175	4745	5290	5850	6430	6985
	40	2025	2765	3280	3760	4270	4765	5270	5790	6290
	50	1800	2460	2920	3345	3800	4240	4690	5150	5595
	65	1490	2035	2415	2765	3140	3505	3875	4260	4625
	70	1355	1850	2195	2515	2860	3190	3525	3875	4210

For remarks and the explanation of abbreviations, see inside of the last page.

710/45 R 22.5 IMP 165 D TL FLOTATION TRAC

EAN		8714692183454				Section width		730 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1230 mm		
Tyre construction		Radial				Static loaded radius		570 mm		
Recommended rim width		AG 24.00				Rolling circumference		3780 mm		
						SRI		575		
EAN Tube		8714692335020				Tread depth		23 mm		
						Tie bar height		5 mm		
						75% tyre volume		325 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	2980	4070	4830	5535	6285	7010	7705	8520	9270
	25	2615	3570	4240	4855	5515	6150	6765	7475	8135
	30	2500	3415	4050	4640	5270	5880	6465	7145	7775
	40	2250	3075	3650	4180	4750	5295	5825	6435	7005
	50	2005	2735	3245	3720	4225	4710	5180	5725	6230
	65	1655	2260	2680	3075	3490	3895	4280	4735	5150
	70	1505	2060	2440	2795	3175	3545	3895	4305	4685

For remarks and the explanation of abbreviations, see inside of the last page.

800/40 R 22.5 IMP 168 D TL FLOTATION TRAC

EAN		8714692335587					Section width		790 mm										
Nominal tyre pressure		4,0 bar					Overall diameter		1220 mm										
Tyre construction		Radial					Static loaded radius		550 mm										
Recommended rim width		AG 28.00					Rolling circumference		3700 mm										
							SRI		575										
							Tread depth		23 mm										
							Tie bar height		8 mm										
							75% tyre volume		348 l										
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10	3230	4415	5235	6000	6815	7600	8355	9235	10080									
	25	2835	3875	4595	5265	5980	6670	7335	8110	8850									
	30	2710	3700	4390	5035	5715	6375	7010	7750	8455									
	40	2440	3335	3955	4535	5150	5740	6315	6980	7615									
	50	2170	2965	3520	4035	4580	5110	5620	6210	6775									
	65	1795	2450	2910	3335	3785	4220	4645	5130	5600									
	70	1635	2230	2645	3035	3445	3840	4225	4670	5095									

For remarks and the explanation of abbreviations, see inside of the last page.

710/65 R 26 IMP 179 D TL FLOTATION TRAC

EAN				8714692335594		Section width			735 mm								
Nominal tyre pressure				4,0 bar		Overall diameter			1565 mm								
Tyre construction				Radial		Static loaded radius			715 mm								
Recommended rim width				DW 25B		Rolling circumference			4855 mm								
Alternative size description(s)				28 LR 26		SRI			750								
						Tread depth			26 mm								
						Tie bar height			9 mm								
						75% tyre volume			563 l								
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10	6065	7195	8245	9365	10445	11485	12695	13950								
	25	5325	6315	7235	8220	9165	10080	11140	12245								
	30	5085	6035	6915	7855	8760	9635	10650	11705								
	40	4580	5435	6230	7075	7890	8675	9590	10540								
	50	4075	4835	5540	6295	7020	7720	8530	9380								
	65	3370	3995	4580	5200	5800	6380	7050	7750								
	70	3065	3635	4170	4735	5280	5805	6415	7055								

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

600/55 R 26.5 IMP 165 D TL FLOTATION TRAC

EAN		8714692309885				Section width		620 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1350 mm		
Tyre construction		Radial				Static loaded radius		625 mm		
Recommended rim width		AG 20.00				Rolling circumference		4170 mm		
						SRI		650		
						Tread depth		25 mm		
						Tie bar height		9 mm		
						75% tyre volume		307 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	3060	4635	5560	6490	7415	7890	8345	8805	9270
	25	2685	4070	4880	5695	6510	6915	7320	7730	8135
	30	2565	3890	4665	5445	6220	6610	7000	7385	7775
	40	2310	3505	4205	4905	5605	5955	6305	6655	7005
	50	2055	3115	3740	4360	4985	5295	5605	5920	6230
	65	1700	2575	3090	3605	4120	4380	4635	4895	5150
	70	1545	2345	2810	3280	3750	3980	4215	4450	4685

For remarks and the explanation of abbreviations, see inside of the last page.

650/55 R 26.5 IMP 169 D TL FLOTATION TRAC

EAN		8714692186691		Section width		650 mm				
Nominal tyre pressure		4,0 bar		Overall diameter		1400 mm				
Tyre construction		Radial		Static loaded radius		635 mm				
Recommended rim width		AG 20.00		Rolling circumference		4300 mm				
				SRI		650				
				Tread depth		26 mm				
				Tie bar height		8 mm				
				75% tyre volume		368 l				
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	3375	4610	5470	6270	7120	7945	8735	9655	10440
	25	2965	4050	4800	5505	6250	6970	7665	8475	9165
	30	2830	3870	4590	5260	5975	6665	7325	8100	8760
	40	2550	3485	4135	4735	5380	6000	6600	7295	7890
	50	2270	3100	3680	4215	4785	5340	5870	6490	7020
	65	1875	2560	3040	3485	3955	4415	4850	5365	5800
	70	1705	2330	2765	3170	3600	4015	4415	4880	5280

For remarks and the explanation of abbreviations, see inside of the last page.

650/65 R 26.5 IMP 174 D TL FLOTATION TRAC

EAN				8714692309892		Section width				660 mm									
Nominal tyre pressure				4,0 bar		Overall diameter				1520 mm									
Tyre construction				Radial		Static loaded radius				700 mm									
Recommended rim width				AG 20.00		Rolling circumference				4680 mm									
						SRI				725									
						Tread depth				26 mm									
						Tie bar height				9 mm									
						75% tyre volume				464 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10	3980	6030	7235	8440	9650	10250	10855	11455	12060									
	25	3495	5292	6350	7410	8470	8995	9525	10055	10585									
	30	3340	5060	6070	7080	8090	8600	9105	9610	10115									
	40	3005	4555	5465	6375	7290	7745	8200	8655	9110									
	50	2675	4055	4865	5675	6485	6890	7295	7700	8105									
	65	2210	3350	4020	4690	5360	5695	6030	6365	6700									
	70	2010	3050	3655	4265	4875	5180	5485	5790	6095									

For remarks and the explanation of abbreviations, see inside of the last page.

710/50 R 26.5 IMP 170 D TL FLOTATION TRAC

EAN				8714692309915		Section width				725 mm									
Nominal tyre pressure				4,0 bar		Overall diameter				1380 mm									
Tyre construction				Radial		Static loaded radius				635 mm									
Recommended rim width				AG 24.00		Rolling circumference				4265 mm									
						SRI				650									
						Tread depth				25 mm									
						Tie bar height				9 mm									
						75% tyre volume				392 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)																	
Speed (km/h)	10	3565	5400	6480	7560	8640	9180	9720	10260	10800									
	25	3130	4740	5690	6635	7585	8060	8530	9005	9480									
	30	2990	4530	5435	6340	7250	7700	8155	8605	9060									
	40	2695	4080	4895	5710	6530	6935	7345	7750	8160									
	50	2395	3630	4355	5080	5810	6170	6535	6895	7260									
	65	1980	3000	3600	4200	4800	5100	5400	5700	6000									
	70	1800	2730	3275	3820	4370	4640	4915	5185	5460									

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

750/45 R 26.5 IMP 170 D TL FLOTATION TRAC

EAN		8714692186721				Section width		740 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1365 mm		
Tyre construction		Radial				Static loaded radius		620 mm		
Recommended rim width		AG 24.00				Rolling circumference		4180 mm		
						SRI		650		
						Tread depth		26 mm		
						Tie bar height		7 mm		
						75% tyre volume		397 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)								
Speed (km/h)	10	3485	4760	5650	6475	7355	8200	9020	9965	10800
	25	3060	4180	4960	5680	6455	7200	7915	8750	9480
	30	2925	3995	4740	5430	6170	6880	7565	8360	9060
	40	2635	3600	4270	4890	5555	6195	6815	7530	8160
	50	2345	3200	3795	4350	4945	5515	6060	6700	7260
	65	1935	2645	3140	3595	4085	4555	5010	5535	6000
	70	1760	2405	2855	3275	3715	4145	4560	5040	5460

For remarks and the explanation of abbreviations, see inside of the last page.

800/45 R 26.5 IMP 174 D TL FLOTATION TRAC

EAN				8714692309908		Section width			800 mm		
Nominal tyre pressure				4,0 bar		Overall diameter			1380 mm		
Tyre construction				Radial		Static loaded radius			640 mm		
Recommended rim width				AG 28.00		Rolling circumference			4300 mm		
						SRI			675		
						Tread depth			25 mm		
						Tie bar height			9 mm		
						75% tyre volume			430 l		
		Tyre pressure (bar)									
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre (kg)									
Speed (km/h)	10	3980	5425	6635	7840	8925	9710	10490	11275	12060	
	25	3495	4765	5820	6880	7835	8520	9210	9895	10585	
	30	3340	4550	5565	6575	7485	8145	8800	9460	10115	
	40	3005	4100	5010	5920	6740	7335	7925	8520	9110	
	50	2675	3645	4460	5270	6000	6525	7050	7580	8105	
	65	2210	3015	3685	4355	4960	5395	5830	6265	6700	
	70	2010	2745	3350	3960	4510	4905	5305	5700	6095	

For remarks and the explanation of abbreviations, see inside of the last page.

FLOTATION TRAC

600/60 R 30.5 IMP 169 D TL FLOTATION TRAC

EAN		8714692244568		Section width		610 mm			
Nominal tyre pressure		4,0 bar		Overall diameter		1505 mm			
Tyre construction		Radial		Static loaded radius		710 mm			
Recommended rim width		AG 20.00		Rolling circumference		4675 mm			
				SRI		725			
				Tread depth		26 mm			
				Tie bar height		9 mm			
				75% tyre volume		371 l			
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	4630	5490	6290	7145	7970	8775	9685	10440
	25	4060	4820	5525	6275	6995	7705	8505	9165
	30	3880	4605	5280	5995	6685	7360	8125	8760
	40	3495	4150	4755	5400	6020	6630	7320	7890
	50	3110	3690	4230	4805	5360	5900	6510	7020
	65	2570	3050	3495	3970	4430	4875	5380	5800
	70	2340	2775	3180	3615	4030	4435	4895	5280

For remarks and the explanation of abbreviations, see inside of the last page.

650/65 R 30.5 IMP 176 D TL FLOTATION TRAC

EAN				8714692244582	Section width				660 mm
Nominal tyre pressure				4,0 bar	Overall diameter				1635 mm
Tyre construction				Radial	Static loaded radius				755 mm
Recommended rim width				AG 20.00	Rolling circumference				5075 mm
					SRI				775
					Tread depth				26 mm
					Tie bar height				9 mm
					75% tyre volume				502 l
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	5630	6680	7655	8690	9695	10800	11780	12780
	25	4940	5860	6715	7630	8510	9480	10340	11220
	30	4720	5600	6420	7290	8135	9060	9885	10720
	40	4255	5045	5780	6565	7325	8160	8900	9655
	50	3785	4490	5145	5845	6515	7260	7920	8590
	65	3125	3710	4250	4830	5385	6000	6545	7100
	70	2845	3375	3870	4395	4900	5460	5955	6460

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

710/50 R 30.5 IMP 173 D TL FLOTATION TRAC

EAN		8714692175435			Section width		730 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1495 mm		
Tyre construction		Radial			Static loaded radius		680 mm		
Recommended rim width		AG 24.00			Rolling circumference		4530 mm		
					SRI		700		
					Tread depth		28 mm		
					Tie bar height		9 mm		
					75% tyre volume		430 l		
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	5115	6065	6955	7895	8810	9810	10705	11700
	25	4490	5325	6105	6930	7730	8610	9395	10270
	30	4290	5090	5835	6625	7390	8230	8980	9815
	40	3865	4585	5255	5965	6655	7410	8090	8840
	50	3440	4080	4675	5310	5920	6595	7195	7865
	65	2840	3370	3865	4385	4895	5450	5945	6500
	70	2585	3065	3515	3995	4455	4960	5410	5915

For remarks and the explanation of abbreviations, see inside of the last page.

750/60 R 30.5 IMP 181 D TL FLOTATION TRAC

EAN		8714692174926			Section width		785 mm											
Nominal tyre pressure		4,0 bar			Overall diameter		1675 mm											
Tyre construction		Radial			Static loaded radius		775 mm											
Recommended rim width		AG 24.00			Rolling circumference		5075 mm											
					SRI		800											
					Tread depth		28 mm											
					Tie bar height		9 mm											
					75% tyre volume		654 l											
		Tyre pressure (bar)																
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00		
		Load capacity per tyre (kg)																
Speed (km/h)	10	6555	7780	8915	10125	11295	12420	13725	14850									
	25	5755	6830	7825	8885	9910	10900	12045	13035									
	30	5500	6525	7480	8495	9475	10420	11515	12460									
	40	4955	5875	6735	7650	8530	9385	10370	11220									
	50	4410	5230	5990	6805	7590	8350	9225	9985									
	65	3645	4320	4950	5625	6275	6900	7625	8250									
	70	3315	3930	4505	5120	5710	6280	6940	7510									

For remarks and the explanation of abbreviations, see inside of the last page.

FLOTATION TRAC

800/45 R 30.5 IMP 176 D TL FLOTATION TRAC

EAN				8714692244605		Section width				810 mm							
Nominal tyre pressure				4,0 bar		Overall diameter				1510 mm							
Tyre construction				Radial		Static loaded radius				700 mm							
Recommended rim width				AG 28.00		Rolling circumference				4710 mm							
Permitted rim width				AG 24.00		SRI				725							
						Tread depth				26 mm							
						Tie bar height				9 mm							
						75% tyre volume				498 l							
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10	5605	6650	7620	8655	9655	10615	11735	12780								
	25	4920	5840	6690	7600	8475	9320	10300	11220								
	30	4705	5580	6395	7260	8100	8905	9845	10720								
	40	4235	5025	5760	6540	7295	8020	8865	9655								
	50	3770	4470	5125	5820	6490	7135	7890	8590								
	65	3115	3695	4235	4810	5365	5900	6520	7100								
	70	2835	3360	3855	4375	4880	5370	5935	6460								

For remarks and the explanation of abbreviations, see inside of the last page.

850/50 R 30.5 IMP 182 D TL FLOTATION TRAC

EAN				8714692174940		Section width				870 mm							
Nominal tyre pressure				4,0 bar		Overall diameter				1655 mm							
Tyre construction				Radial		Static loaded radius				725 mm							
Recommended rim width				AG 28.00		Rolling circumference				4910 mm							
						SRI				775							
						Tread depth				28 mm							
						Tie bar height				9 mm							
						75% tyre volume				676 l							
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10	6765	8030	9200	10450	11655	12815	14165	15300								
	25	5940	7045	8075	9170	10230	11250	12435	13430								
	30	5675	6735	7720	8765	9775	10750	11885	12835								
	40	5115	6065	6950	7895	8805	9685	10700	11560								
	50	4550	5395	6185	7025	7835	8615	9520	10285								
	65	3760	4460	5110	5805	6475	7120	7870	8500								
	70	3420	4060	4650	5285	5890	6480	7160	7735								

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

800/60 R 32 IMP 185 D TL FLOTATION TRAC

EAN		8714692291548			Section width			810 mm									
Nominal tyre pressure		4,0 bar			Overall diameter			1795 mm									
Tyre construction		Radial			Static loaded radius			810 mm									
Recommended rim width		DW 27B			Rolling circumference			5550 mm									
					SRI			825									
					Tread depth			28 mm									
					Tie bar height			9 mm									
					75% tyre volume			777 l									
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10	7410	8790	10070	11440	12760	14030	15505	16650								
	25	6505	7715	8840	10040	11200	12315	13610	14615								
	30	6215	7375	8450	9595	10705	11770	13010	13970								
	40	5600	6640	7610	8645	9640	10600	11715	12580								
	50	4980	5910	6770	7690	8575	9430	10425	11195								
	65	4115	4885	5595	6355	7090	7795	8615	9250								
	70	3745	4445	5090	5785	6450	7095	7840	8420								

For remarks and the explanation of abbreviations, see inside of the last page.

900/65 R 32 IMP 188 D TL FLOTATION TRAC

EAN		8714692360879			Section width		910* mm	
Nominal tyre pressure		3,2 bar			Overall diameter		1980* mm	
Tyre construction		Radial			Static loaded radius		895* mm	
Recommended rim width		DW 30B			Rolling circumference		6120* mm	
Permitted rim width		DH31, DW31			SRI		925	
Alternative size description (s)		35.5 LR 32			Tread depth (including tie bar)		31 mm	
					75% tyre volume		1078* l	
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)						
Speed (km/h)	10	7050	9630	11425	13095	14875	16590	18000
	25	6190	8455	10030	11495	13055	14560	15800
	30		8080	9585	10985	12475	13915	15100
	40		7280	8635	9895	11235	12535	13600
	50		6475	7680	8805	10000	11150	12100
	65		5350	6350	7275	8265	9215	10000
	70		4870	5775	6620	7520	8385	9100

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values

FLOTATION TRAC

900/65 R 38 IMP 191 D TL FLOTATION TRAC

EAN	8714692360893	Section width	910* mm
Nominal tyre pressure	3,2 bar	Overall diameter	2130* mm
Tyre construction	Radial	Static loaded radius	960* mm
Recommended rim width	DW 30B	Rolling circumference	6585* mm
Permitted rim width	DH31, DW31	SRI	1025
Alternative size description (s)	35.5 LR 38	Tread depth (including tie bar)	31 mm
		75% tyre volume	1189* l

		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)						
Speed (km/h)	10	7555	10320	12245	14030	15935	17775	19620
	25	6630	9060	10745	12315	13990	15600	17220
	30		8660	10270	11770	13370	14910	16460
	40		7795	9250	10600	12040	13430	14825
	50		6935	8230	9430	10710	11950	13190
	65		5735	6800	7795	8855	9875	10900
	70		5215	6190	7095	8055	8985	9920

For remarks and the explanation of abbreviations, see inside of the last page.

* = Calculated values



IMPLEMENT RADIAL



FLOTATION ^{PRO}

MEETS THE HIGH DEMANDS
OF PROFESSIONALS

FEATURES	BENEFITS
High rubber content in profile	Minimal rutting, long lifespan
Flexible and strong carcass	Good flotation properties, high comfort level
Flat contour & rounded shoulders	No damage to vulnerable crops



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
22.5	560/45 R 22.5 IMP	146 D	3,2	AG 16.00	545	1085	490	3295	160
	560/45 R 22.5 IMP	152 D	4,0	AG 16.00	545	1085	490	3295	160
	560/60 R 22.5 IMP	155 D	3,2	AG 16.00	565	1250	560	3850	161
	560/60 R 22.5 IMP	161 D	4,0	AG 16.00	565	1250	560	3850	161
	560/60 R 22.5 IMP	165 D	5,0	AG 16.00	565	1250	560	3850	162
	620/40 R 22.5 IMP	148 D	3,2	AG 20.00	610	1080	495	3330	162
	620/40 R 22.5 IMP	154 D	4,0	AG 20.00	610	1080	495	3330	163
	620/50 R 22.5 IMP	154 D	3,2	AG 20.00	610	1185	540	3640	163
	620/50 R 22.5 IMP	161 D	4,0	AG 20.00	610	1185	540	3640	164
	650/50 R 22.5 IMP	157 D	3,2	AG 20.00	645	1250	560	3850	164
	650/50 R 22.5 IMP	163 D	4,0	AG 20.00	645	1250	560	3850	165
	710/40 R 22.5 IMP	161 D	4,0	AG 24.00	705	1140	520	3520	165
	620/55 R 26.5 IMP	166 D	4,0	AG 20.00	625	1360	620	4200	166
26.5	710/50 R 26.5 IMP	170 D	4,0	AG 24.00	710	1360	620	4200	166
	800/45 R 26.5 IMP	174 D	4,0	AG 28.00	800	1370	625	4200	167
	800/45 R 26.5 IMP	174 D	4,0	AG 28.00	800	1370	625	4200	167

For the explanation of the symbols and abbreviations, see the inside of the last page.



IMPLEMENT RADIAL

560/45 R 22.5 IMP 146 D TL FLOTATION PRO

EAN		8714692080845		Section width		545 mm							
Nominal tyre pressure		3,2 bar		Overall diameter		1085 mm							
Tyre construction		Radial		Static loaded radius		490 mm							
Recommended rim width		AG 16.00		Rolling circumference		3295 mm							
				SRI		525							
				Tread depth		17 mm							
				75% tyre volume		170 l							
		Tyre pressure (bar)											
		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre (kg)											
Speed (km/h)	10	2650	3235	3755	4305	4845	5400						
	25	2325	2840	3295	3780	4255	4740						
	30	2220	2715	3150	3610	4065	4530						
	40	2000	2445	2835	3250	3660	4080						
	50	1780	2175	2525	2895	3260	3630						
	65	1470	1800	2085	2390	2695	3000						
	70	1340	1635	1900	2175	2450	2730						

For remarks and the explanation of abbreviations, see inside of the last page.

560/45 R 22.5 IMP 152 D TL FLOTATION PRO

EAN		8714692080869			Section width			545 mm		
Nominal tyre pressure		4,0 bar			Overall diameter			1085 mm		
Tyre construction		Radial			Static loaded radius			490 mm		
Recommended rim width		AG 16.00			Rolling circumference			3295 mm		
					SRI			525		
					Tread depth			17 mm		
					75% tyre volume			170 l		
		Tyre pressure (bar)								
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre (kg)								
Speed (km/h)	10	2650	3235	3755	4305	4845	5400	5890	6390	
	25	2325	2840	3295	3780	4255	4740	5170	5610	
	30	2220	2715	3150	3610	4065	4530	4940	5360	
	40	2000	2445	2835	3250	3660	4080	4450	4830	
	50	1780	2175	2525	2895	3260	3630	3960	4295	
	65	1470	1800	2085	2390	2695	3000	3270	3550	
	70	1340	1635	1900	2175	2450	2730	2980	3230	

For remarks and the explanation of abbreviations, see inside of the last page.

560/60 R 22.5 IMP 155 D TL FLOTATION PRO

EAN	8714692080883	Section width	565 mm				
Nominal tyre pressure	3,2 bar	Overall diameter	1260 mm				
Tyre construction	Radial	Static loaded radius	560 mm				
Recommended rim width	AG 16.00	Rolling circumference	3850 mm				
		SRI	600				
EAN Tube	8714692285044	Tread depth	17 mm				
		75% tyre volume	264 l				
		Tyre pressure (bar)					
		1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)					
Speed (km/h)	10	3425	4185	4850	5565	6265	6975
	25	3005	3670	4260	4885	5500	6125
	30	2870	3510	4070	4665	5255	5850
	40	2585	3160	3665	4205	4735	5270
	50	2300	2810	3260	3740	4210	4690
	65	1900	2325	2695	3090	3480	3875
	70	1730	2115	2455	2810	3165	3525

For remarks and the explanation of abbreviations, see inside of the last page.

560/60 R 22.5 IMP 161 D TL FLOTATION PRO

EAN	8714692080906	Section width	565 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1260 mm						
Tyre construction	Radial	Static loaded radius	560 mm						
Recommended rim width	AG 16.00	Rolling circumference	3850 mm						
		SRI	600						
EAN Tube	8714692285044	Tread depth	17 mm						
		75% tyre volume	264 l						
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	3425	4185	4850	5565	6265	6975	7615	8325
	25	3005	3670	4260	4885	5500	6125	6680	7310
	30	2870	3510	4070	4665	5255	5850	6385	6985
	40	2585	3160	3665	4205	4735	5270	5750	6290
	50	2300	2810	3260	3740	4210	4690	5120	5595
	65	1900	2325	2695	3090	3480	3875	4230	4625
	70	1730	2115	2455	2810	3165	3525	3850	4210

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

560/60 R 22.5 IMP 165 D TL FLOTATION PRO

EAN		8714692342646				Section width				565 mm	
Nominal tyre pressure		5,0 bar				Overall diameter				1260 mm	
Tyre construction		Radial				Static loaded radius				560 mm	
Recommended rim width		AG 16.00				Rolling circumference				3850 mm	
EAN Tube		8714692285044				SRI				600	
						Tread depth				17 mm	
						75% tyre volume				264 l	
		Tyre pressure (bar)									
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	5,00
		Load capacity per tyre (kg)									
Speed (km/h)	10	3425	4185	4850	5565	6265	6975	7615	8325	8675	9270
	25	3005	3670	4260	4885	5500	6125	6680	7310	7615	8135
	30	2870	3510	4070	4665	5255	5850	6385	6985	7280	7775
	40	2585	3160	3665	4205	4735	5270	5750	6290	6555	7005
	50	2300	2810	3260	3740	4210	4690	5120	5595	5835	6230
	65	1900	2325	2695	3090	3480	3875	4230	4625	4820	5150
	70	1730	2115	2455	2810	3165	3525	3850	4210	4385	4685

For remarks and the explanation of abbreviations, see inside of the last page.

620/40 R 22.5 IMP 148 D TL FLOTATION PRO

EAN		8714692106842		Section width		610 mm							
Nominal tyre pressure		3,2 bar		Overall diameter		1090 mm							
Tyre construction		Radial		Static loaded radius		495 mm							
Recommended rim width		AG 20.00		Rolling circumference		3330 mm							
Permitted rim width				SRI		525							
				Tread depth		17 mm							
				75% tyre volume		190 l							
		Tyre pressure (bar)											
		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre (kg)											
Speed (km/h)	10	2795	3415	3960	4540	5115	5670						
	25	2455	3000	3480	3985	4490	4975						
	30	2345	2865	3325	3810	4290	4755						
	40	2110	2580	2995	3430	3865	4285						
	50	1880	2295	2665	3055	3440	3810						
	65	1555	1900	2200	2525	2840	3150						
	70	1415	1725	2005	2295	2585	2865						

For remarks and the explanation of abbreviations, see inside of the last page.

620/40 R 22.5 IMP 154 D TL FLOTATION PRO

EAN		8714692155178			Section width			610 mm		
Nominal tyre pressure		4,0 bar			Overall diameter			1080 mm		
Tyre construction		Radial			Static loaded radius			495 mm		
Recommended rim width		AG 20.00			Rolling circumference			3330 mm		
					SRI			525		
					Tread depth			17 mm		
					75% tyre volume			190 l		
		Tyre pressure (bar)								
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre (kg)								
Speed (km/h)	10	2795	3415	3960	4540	5115	5670	6215	6750	
	25	2455	3000	3480	3985	4490	4975	5455	5925	
	30	2345	2865	3325	3810	4290	4755	5215	5665	
	40	2110	2580	2995	3430	3865	4285	4695	5100	
	50	1880	2295	2665	3055	3440	3810	4180	4540	
	65	1555	1900	2200	2525	2840	3150	3455	3750	
	70	1415	1725	2005	2295	2585	2865	3145	3415	

For remarks and the explanation of abbreviations, see inside of the last page.

620/50 R 22.5 IMP 154 D TL FLOTATION PRO

EAN		8714692106859		Section width		610 mm	
Nominal tyre pressure		3,2 bar		Overall diameter		1185 mm	
Tyre construction		Radial		Static loaded radius		540 mm	
Recommended rim width		AG 20.00		Rolling circumference		3640 mm	
				SRI		575	
				Tread depth		17 mm	
				75% tyre volume		239 l	
		Tyre pressure (bar)					
		1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)					
Speed (km/h)	10	3405	4160	4825	5535	6230	6750
	25	2990	3655	4235	4855	5470	5925
	30	2855	3490	4050	4640	5225	5665
	40	2575	3145	3645	4180	4710	5100
	50	2290	2800	3245	3720	4190	4540
	65	1890	2310	2680	3075	3460	3750
	70	1720	2105	2440	2800	3150	3415

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

620/50 R 22.5 IMP TL 161 D FLOTATION PRO

EAN		8714692159855			Section width			610 mm									
Nominal tyre pressure		4,0 bar			Overall diameter			1185 mm									
Tyre construction		Radial			Static loaded radius			540 mm									
Recommended rim width		AG 20.00			Rolling circumference			3640 mm									
					SRI			575									
					Tread depth			17 mm									
					75% tyre volume			239 l									
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10	3405	4160	4825	5535	6230	6750	7575	8325								
	25	2990	3655	4235	4855	5470	5925	6650	7310								
	30	2855	3490	4050	4640	5225	5665	6355	6985								
	40	2575	3145	3645	4180	4710	5100	5720	6290								
	50	2290	2800	3245	3720	4190	4540	5090	5595								
	65	1890	2310	2680	3075	3460	3750	4205	4625								
	70	1720	2105	2440	2800	3150	3415	3830	4210								

For remarks and the explanation of abbreviations, see inside of the last page.

650/50 R 22.5 IMP 157 D TL FLOTATION PRO

EAN		8714692055942		Section width		645 mm	
Nominal tyre pressure		3,2 bar		Overall diameter		1250 mm	
Tyre construction		Radial		Static loaded radius		560 mm	
Recommended rim width		AG 20.00		Rolling circumference		3850 mm	
				SRI		575	
				Tread depth		17 mm	
				75% tyre volume		304 l	
		Tyre pressure (bar)					
		1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre (kg)					
Speed (km/h)	10	3670	4485	5200	5960	6710	7425
	25	3220	3935	4565	5230	5890	6520
	30	3075	3760	4360	5000	5630	6230
	40	2770	3385	3930	4505	5070	5610
	50	2465	3015	3495	4005	4510	4990
	65	2040	2490	2890	3310	3730	4125
	70	1855	2265	2630	3015	3395	3755

For remarks and the explanation of abbreviations, see inside of the last page.

650/50 R 22.5 IMP 163 D TL FLOTATION PRO

EAN		8714692080920			Section width		645 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1250 mm		
Tyre construction		Radial			Static loaded radius		560 mm		
Recommended rim width		AG 20.00			Rolling circumference		3850 mm		
					SRI		575		
					Tread depth		17 mm		
					Tie bar height		0 mm		
					75% tyre volume		304 l		
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	3670	4485	5200	5960	6710	7425	8155	8775
	25	3220	3935	4565	5230	5890	6520	7160	7705
	30	3075	3760	4360	5000	5630	6230	6845	7360
	40	2770	3385	3930	4505	5070	5610	6165	6630
	50	2465	3015	3495	4005	4510	4990	5485	5900
	65	2040	2490	2890	3310	3730	4125	4530	4875
	70	1855	2265	2630	3015	3395	3755	4125	4435

For remarks and the explanation of abbreviations, see inside of the last page.

710/40 R 22.5 IMP 161 D TL FLOTATION PRO

EAN		8714692295560			Section width		705 mm										
Nominal tyre pressure		4,0 bar			Overall diameter		1140 mm										
Tyre construction		Radial			Static loaded radius		520 mm										
Recommended rim width		AG 24.00			Rolling circumference		3520 mm										
					SRI		550										
					Tread depth		17 mm										
					75% tyre volume		250 l										
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre (kg)															
Speed (km/h)	10	3445	4210	4885	5600	6305	6975	7665	8325								
	25	3025	3695	4290	4915	5535	6125	6730	7310								
	30	2890	3535	4100	4700	5290	5850	6430	6985								
	40	2605	3185	3690	4230	4765	5270	5790	6290								
	50	2315	2830	3285	3765	4240	4690	5150	5595								
	65	1915	2340	2715	3110	3505	3875	4260	4625								
	70	1740	2130	2470	2830	3190	3525	3875	4210								

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT RADIAL

620/55 R 26.5 IMP 166 D TL FLOTATION PRO

EAN		8714692110221			Section width			625 mm										
Nominal tyre pressure		4,0 bar			Overall diameter			1360 mm										
Tyre construction		Radial			Static loaded radius			620 mm										
Recommended rim width		AG 20.00			Rolling circumference			4200 mm										
					SRI			650										
					Tread depth			19 mm										
					75% tyre volume			327 l										
		Tyre pressure (bar)																
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00		
		Load capacity per tyre (kg)																
Speed (km/h)	10	3985	4870	5645	6475	7290	8100	8860	9540									
	25	3495	4275	4955	5685	6400	7110	7775	8375									
	30	3340	4085	4735	5430	6115	6795	7435	8005									
	40	3010	3680	4265	4890	5510	6120	6695	7210									
	50	2680	3275	3795	4350	4900	5445	5955	6415									
	65	2215	2705	3135	3595	4050	4500	4920	5300									
	70	2015	2460	2855	3275	3685	4095	4480	4825									

For remarks and the explanation of abbreviations, see inside of the last page.

710/50 R 26.5 IMP 170 D TL FLOTATION PRO

EAN		8714692198700			Section width		710 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1360 mm		
Tyre construction		Radial			Static loaded radius		620 mm		
Recommended rim width		AG 24.00			Rolling circumference		4200 mm		
					SRI		650		
					Tread depth		19 mm		
					75% tyre volume		374 l		
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	4450	5440	6310	7235	8145	9000	9900	10800
	25	3905	4775	5540	6350	7150	7900	8690	9480
	30	3735	4565	5290	6070	6835	7550	8305	9060
	40	3365	4110	4765	5465	6155	6800	7480	8160
	50	2990	3655	4240	4860	5475	6050	6655	7260
	65	2475	3020	3505	4020	4525	5000	5500	6000
	70	2250	2750	3190	3655	4120	4550	5005	5460

For remarks and the explanation of abbreviations, see inside of the last page.

800/45 R 26.5 IMP 174 D TL FLOTATION PRO

EAN		8714692198724			Section width		800 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1370 mm		
Tyre construction		Radial			Static loaded radius		625 mm		
Recommended rim width		AG 28.00			Rolling circumference		4200 mm		
					SRI		675		
					Tread depth		19 mm		
					75% tyre volume		423 l		
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre (kg)							
Speed (km/h)	10	4955	6060	7025	8055	9070	10080	11025	12060
	25	4350	5320	6165	7070	7960	8850	9675	10585
	30	4160	5080	5895	6755	7610	8455	9250	10115
	40	3745	4575	5310	6085	6855	7615	8330	9110
	50	3330	4070	4725	5415	6095	6775	7410	8105
	65	2755	3365	3905	4475	5040	5600	6125	6700
	70	2505	3065	3550	4070	4585	5095	5575	6095

For remarks and the explanation of abbreviations, see inside of the last page.



IMPLEMENT BIAS



FLOTATION+

IDEAL FOR HEAVY DUTY WORK

FEATURES	BENEFITS
Sophisticated carcass construction	High load capacity
Large contact area	Minimal soil compaction
Good height/width ratio	Exceptional stability



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
15.3	260/70 - 15.3 IMP	122 A8	3,2	9.00	270	755	345	2280	170
	260/70 - 15.3 IMP	126 A8	3,6	9.00	270	755	345	2280	170
	260/70 - 15.3 IMP	131 A8	5,0	9.00	270	755	345	2280	171
	300/80 - 15.3 IMP	132 A8	2,8	9.00	295	865	385	2575	171
	300/80 - 15.3 IMP	138 A8	3,6	9.00	295	865	385	2575	172
	300/80 - 15.3 IMP	141 A8	4,0	9.00	295	865	385	2575	172
15.5	400/60 - 15.5 IMP	145 A8	3,6	AG 13.00	410	850	380	2530	173
16	340/55 - 16 IMP	133 A8	3,2	11	345	780	365	2360	173
17	380/55 - 17 IMP	133 A8	2,4	13.00	380	845	385	2530	174
	380/55 - 17 IMP	138 A8	2,8	13.00	380	845	385	2530	174
	480/45 - 17 IMP	140 A8	2,4	16.00	480	860	400	2565	175
	480/45 - 17 IMP	146 A8	3,2	16.00	480	860	400	2565	175
	500/50 - 17 IMP	140 A8	2,0	16.00	500	950	430	2890	176
	500/50 - 17 IMP	149 A8	2,8	16.00	500	950	430	2890	176
20	400/70 - 20 IMP	150 A8	2,8	14	420	1080	485	3215	177
	460/65 - 20 IMP	155 A8	2,8	14	460	1100	485	3300	177
	500/55 - 20 IMP	150 A8	2,4	16.00	515	1060	475	3160	178
22.5	560/60 - 22.5 IMP	167 A8	2,8	AG 16.00	565	1240	550	3700	178
	600/55 - 22.5 IMP	168 A8	2,8	AG 20.00	625	1230	550	3700	179
	710/45 - 22.5 IMP	171 A8	2,8	AG 24.00	730	1240	550	3700	179

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT BIAS

260/70 - 15.3 IMP 122 A8 TL FLOTATION+									
EAN				8714692174803		Section width		270 mm	
Nominal tyre pressure				3,2 bar		Overall diameter		755 mm	
Tyre construction				Bias		Static loaded radius		345 mm	
Recommended rim width				9.00		Rolling circumference		2280 mm	
						Tread depth		10 mm	
EAN Tube				8714692239007					
		Tyre pressure (bar)							
		1,00	1,40	1,80	2,20	2,60	3,00	3,20	4,00
		LLV	Load capacity per tyre (kg)						HLV
Speed (km/h)	10	885	1110	1330	1550	1770	1990	2100	2550
	25	755	940	1130	1320	1510	1690	1790	2160
	30	710	885	1060	1240	1420	1590	1680	2040
	40		790	950	1110	1260	1420	1500	1820
	50			855	995	1140	1280	1350	1640

For remarks and the explanation of abbreviations, see inside of the last page.

260/70 - 15.3 IMP 126 A8 TL FLOTATION+											
EAN			8714692174810			Section width			270 mm		
Nominal tyre pressure			3,6 bar			Overall diameter			755 mm		
Tyre construction			Bias			Static loaded radius			345 mm		
Recommended rim width			9.00			Rolling circumference			2280 mm		
						Tread depth			10 mm		
EAN Tube			8714692239007								
		Tyre pressure (bar)									
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,60	4,40	
		LLV								HLV	
Speed (km/h)	10	905	1130	1360	1590	1810	2040	2270	2380	2830	
	25	770	965	1160	1350	1540	1730	1930	2020	2410	
	30	725	905	1090	1270	1450	1630	1810	1900	2270	
	40		810	970	1130	1300	1460	1620	1700	2020	
	50			875	1020	1170	1310	1460	1530	1820	

For remarks and the explanation of abbreviations, see inside of the last page.

260/70 - 15.3 IMP 131 A8 TL FLOTATION+

EAN				8714692174827				Section width				270 mm											
Nominal tyre pressure				5,0 bar				Overall diameter				755 mm											
Tyre construction				Bias				Static loaded radius				345 mm											
Recommended rim width				9.00				Rolling circumference				2280 mm											
								Tread depth				10 mm											
EAN Tube				8714692239007																			
												Tyre pressure (bar)											
		1,00		1,50		2,00		2,50		3,00		3,50		4,00		4,50		5,00		6,00			
		LLV																				HLV	
Speed (km/h)	10	780	1020	1270	1510	1760	2000	2240	2490	2730	3220												
	25	665	870	1080	1280	1490	1700	1910	2110	2320	2740												
	30	625	820	1010	1210	1400	1600	1790	1990	2180	2570												
	40		730	905	1080	1250	1430	1600	1780	1950	2300												
	50			815	970	1130	1290	1440	1600	1760	2070												

For remarks and the explanation of abbreviations, see inside of the last page.

300/80 - 15.3 IMP 132 A8 TL FLOTATION+

EAN		8714692174834					Section width				295 mm	
Nominal tyre pressure		2,8 bar					Overall diameter				865 mm	
Tyre construction		Bias					Static loaded radius				385 mm	
Recommended rim width		9.00					Rolling circumference				2575 mm	
							Tread depth				11 mm	
EAN Tube		8714692239014										
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		LLV	Load capacity per tyre (kg)									HLV
Speed (km/h)	10	1320	1480	1650	1810	1980	2140	2310	2470	2630	2800	3300
	25	1120	1260	1400	1540	1680	1820	1960	2100	2240	2380	2800
	30	1050	1190	1320	1450	1580	1710	1840	1980	2110	2240	2630
	40			1180	1290	1410	1530	1650	1760	1880	2000	2350
	50					1270	1380	1480	1590	1690	1800	2120

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS

300/80 - 15.3 IMP 138 A8 TL FLOTATION+											
EAN			8714692174841				Section width			295 mm	
Nominal tyre pressure			3,6 bar				Overall diameter			865 mm	
Tyre construction			Bias				Static loaded radius			385 mm	
Recommended rim width			9.00				Rolling circumference			2575 mm	
							Tread depth			11 mm	
EAN Tube			8714692239014								
		Tyre pressure (bar)									
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,60	4,40	
		LLV Load capacity per tyre (kg)									HLV
Speed (km/h)	10	1260	1570	1890	2200	2520	2830	3140	3300	3940	
	25	1070	1340	1600	1870	2140	2410	2670	2810	3340	
	30	1010	1260	1510	1760	2010	2270	2520	2640	3140	
	40		1120	1350	1570	1800	2020	2250	2360	2810	
	50			1210	1420	1620	1820	2020	2120	2530	

For remarks and the explanation of abbreviations, see inside of the last page.

300/80 - 15.3 IMP 141 A8 TL FLOTATION+												
EAN				8714692174858				Section width				295 mm
Nominal tyre pressure				4,0 bar				Overall diameter				865 mm
Tyre construction				Bias				Static loaded radius				385 mm
Recommended rim width				9.00				Rolling circumference				2575 mm
								Tread depth				11 mm
EAN Tube				8714692239014								
		Tyre pressure (bar)										
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,80	4,00	5,00	
		Load capacity per tyre (kg)										HLV
Speed (km/h)	10	1250	1570	1880	2200	2510	2820	3140	3440	3600	4400	
	25	1070	1330	1600	1870	2130	2400	2670	2930	3060	3740	
	30	1000	1250	1510	1760	2010	2260	2510	2760	2890	3520	
	40		1120	1340	1570	1790	2020	2240	2460	2580	3140	
	50			1210	1410	1610	1810	2020	2220	2320	2820	

For remarks and the explanation of abbreviations, see inside of the last page.

400/60 - 15.5 IMP 145 A8 TL FLOTATION+

EAN		8714692076787		Section width		410 mm				
Nominal tyre pressure		3,6 bar		Overall diameter		850 mm				
Tyre construction		Bias		Static loaded radius		380 mm				
Recommended rim width		AG 13.00		Rolling circumference		2530 mm				
				Tread depth		14 mm				
EAN Tube		8714692239038								
		Tyre pressure (bar)								
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,60	4,40
		Load capacity per tyre (kg)								
		LLV								HLV
Speed (km/h)	10	1550	1940	2320	2710	3100	3480	3880	4060	4840
	25	1320	1640	1970	2300	2630	2960	3280	3460	4120
	30	1240	1550	1860	2170	2480	2790	3100	3260	3880
	40		1380	1660	1940	2210	2490	2760	2900	3460
	50			1490	1740	1990	2240	2490	2610	3120

For remarks and the explanation of abbreviations, see inside of the last page.

340/55 - 16 IMP 133 A8 TL FLOTATION+

EAN		8714692220432				Section width				345 mm
Nominal tyre pressure		3,2 bar				Overall diameter				780 mm
Tyre construction		Bias				Static loaded radius				365 mm
Recommended rim width		11				Rolling circumference				2360 mm
						Tread depth				14 mm
		Tyre pressure (bar)								
		1,00	1,40	1,80	2,20	2,60	3,00	3,20	4,00	
		Load capacity per tyre (kg)								HLV
Speed (km/h)	10	1300	1590	1870	2160	2450	2740	2880	3460	
	25	1100	1350	1590	1840	2080	2330	2450	2940	
	30	1040	1270	1500	1730	1960	2190	2310	2770	
	40		1130	1340	1540	1750	1960	2060	2470	
	50			1210	1390	1580	1760	1850	2220	

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS

380/55 - 17 IMP 133 A8 TL FLOTATION+											
EAN			8714692236396			Section width			380 mm		
Nominal tyre pressure			2,4 bar			Overall diameter			845 mm		
Tyre construction			Bias			Static loaded radius			385 mm		
Recommended rim width			13.00			Rolling circumference			2530 mm		
						Tread depth			15 mm		
EAN Tube			8714692239069								
		Tyre pressure (bar)									
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	3,00	
		LLV Load capacity per tyre (kg)									HLV
Speed (km/h)	10	1540	1730	1920	2110	2310	2500	2690	2880	3460	
	25	1310	1470	1630	1800	1960	2120	2290	2450	2940	
	30	1230	1380	1540	1690	1850	2000	2150	2310	2770	
	40			1370	1510	1650	1790	1920	2060	2470	
	50					1480	1610	1730	1850	2220	

For remarks and the explanation of abbreviations, see inside of the last page.

380/55 - 17 IMP 138 A8 TL FLOTATION+												
EAN		8714692076770					Section width		380 mm			
Nominal tyre pressure		2,8 bar					Overall diameter		845 mm			
Tyre construction		Bias					Static loaded radius		385 mm			
Recommended rim width		13.00					Rolling circumference		2530 mm			
							Tread depth		15 mm			
EAN Tube		8714692239069										
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		LLV Load capacity per tyre (kg) HLV										
Speed (km/h)	10	1560	1760	1950	2150	2340	2540	2740	2930	3120	3320	3900
	25	1330	1490	1660	1830	1990	2160	2330	2490	2660	2820	3320
	30	1250	1410	1560	1720	1880	2030	2190	2340	2500	2660	3120
	40			1400	1540	1670	1810	1950	2090	2230	2370	2790
	50					1510	1630	1760	1880	2010	2140	2510

For remarks and the explanation of abbreviations, see inside of the last page.

480/45 - 17 IMP 140 A8 TL FLOTATION+

EAN				8714692220418		Section width				480 mm	
Nominal tyre pressure				2,4 bar		Overall diameter				860 mm	
Tyre construction				Bias		Static loaded radius				400 mm	
Recommended rim width				16.00		Rolling circumference				2565 mm	
						Tread depth				15 mm	
EAN Tube				8714692239076							
		Tyre pressure (bar)									
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	3,00	
		LLV									HLV
		Load capacity per tyre (kg)									
Speed (km/h)	10	1870	2100	2330	2570	2800	3040	3260	3500	4200	
	25	1590	1780	1980	2180	2380	2580	2780	2970	3580	
	30	1490	1680	1870	2050	2240	2430	2610	2800	3360	
	40			1670	1830	2000	2170	2330	2500	3000	
	50					1800	1950	2100	2250	2700	

For remarks and the explanation of abbreviations, see inside of the last page.

480/45 - 17 IMP 146 A8 TL FLOTATION+

EAN		8714692220425			Section width			480 mm			
Nominal tyre pressure		3,2 bar			Overall diameter			860 mm			
Tyre construction		Bias			Static loaded radius			400 mm			
Recommended rim width		16.00			Rolling circumference			2565 mm			
					Tread depth			15 mm			
EAN Tube		8714692239076									
		Tyre pressure (bar)									
		1,00	1,40	1,80	2,20	2,60	3,00	3,20	4,00		
		LLV							Load capacity per tyre (kg)		
									HLV		
Speed (km/h)	10	1890	2310	2730	3160	3580	4000	4200	5040		
	25	1610	1960	2320	2680	3040	3400	3580	4280		
	30	1510	1850	2180	2520	2860	3200	3360	4040		
	40		1650	1950	2250	2550	2850	3000	3600		
	50			1750	2030	2300	2570	2700	3240		

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS

500/50 - 17 IMP 140 A8 TL FLOTATION+							
EAN			8714692201004		Section width		500 mm
Nominal tyre pressure			2,0 bar		Overall diameter		950 mm
Tyre construction			Bias		Static loaded radius		430 mm
Recommended rim width			16.00		Rolling circumference		2890 mm
					Tread depth		15 mm
EAN Tube			8714692239083				
		Tyre pressure (bar)					
		1,00	1,25	1,50	1,75	2,00	2,50
		LLV					HLV
Speed (km/h)	10	2150	2490	2830	3160	3500	4180
	25	1830	2120	2400	2690	2980	3540
	30	1720	1990	2260	2530	2800	3340
	40			2020	2260	2500	2980
	50					2250	2680

For remarks and the explanation of abbreviations, see inside of the last page.

500/50 - 17 IMP 149 A8 TL FLOTATION+												
EAN		8714692201042				Section width		500 mm				
Nominal tyre pressure		2,8 bar				Overall diameter		950 mm				
Tyre construction		Bias				Static loaded radius		430 mm				
Recommended rim width		16.00				Rolling circumference		2890 mm				
						Tread depth		15 mm				
EAN Tube		8714692239083										
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		LLV Load capacity per tyre (kg)										HLV
Speed (km/h)	10	2140	2410	2680	2940	3220	3480	3740	4020	4280	4540	5360
	25	1820	2050	2270	2500	2730	2960	3180	3420	3640	3860	4540
	30	1710	1930	2140	2360	2570	2780	3000	3220	3420	3640	4280
	40			1910	2100	2290	2490	2680	2870	3060	3240	3820
	50					2060	2240	2410	2580	2750	2920	3440

For remarks and the explanation of abbreviations, see inside of the last page.

400/70 - 20 IMP 150 A8 TL FLOTATION+

EAN		8714692235245		Section width		420 mm						
Nominal tyre pressure		2,8 bar		Overall diameter		1080 mm						
Tyre construction		Bias		Static loaded radius		485 mm						
Recommended rim width		14		Rolling circumference		3215 mm						
				Tread depth		14 mm						
EAN Tube		8714692239113										
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		Load capacity per tyre (kg)										
		LLVHLV										
Speed (km/h)	10	2280	2550	2810	3080	3340	3620	3880	4160	4420	4680	5500
	25	1940	2160	2390	2620	2850	3080	3300	3540	3760	3980	4660
	30	1820	2040	2250	2470	2680	2890	3100	3320	3540	3760	4400
	40			2010	2200	2390	2580	2780	2970	3160	3340	3920
	50					2150	2330	2500	2670	2840	3020	3540

For remarks and the explanation of abbreviations, see inside of the last page.

460/65 - 20 IMP 155 A8 TL FLOTATION+

EAN				8714692235252			Section width				460 mm	
Nominal tyre pressure				2,8 bar			Overall diameter				1100 mm	
Tyre construction				Bias			Static loaded radius				485 mm	
Recommended rim width				14			Rolling circumference				3300 mm	
							Tread depth				14 mm	
EAN Tube				8714692239113								
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		Load capacity per tyre (kg)										
		LLV										
		HLV										
Speed (km/h)	10	2630	2940	3260	3560	3880	4180	4500	4800	5120	5420	6350
	25	2240	2500	2770	3040	3300	3560	3820	4080	4340	4620	5400
	30	2110	2360	2600	2850	3100	3340	3600	3840	4100	4340	5080
	40			2320	2550	2770	2990	3220	3440	3660	3880	4540
	50					2490	2690	2890	3080	3280	3480	4080

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS

500/55 - 20 IMP 150 A8 TL FLOTATION+

EAN		8714692174865				Section width		515 mm		
Nominal tyre pressure		2,4 bar				Overall diameter		1060 mm		
Tyre construction		Bias				Static loaded radius		475 mm		
Recommended rim width		16.00				Rolling circumference		3160 mm		
EAN Tube		8714692239113				Tread depth		14 mm		
		Tyre pressure (bar)								
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	3,00
		LLV								
		Load capacity per tyre (kg)								
		HLV								
Speed (km/h)	10	2500	2810	3120	3440	3760	4060	4380	4680	5620
	25	2130	2390	2660	2920	3180	3460	3720	3980	4780
	30	2000	2250	2500	2750	3000	3260	3500	3760	4500
	40			2230	2460	2680	2900	3120	3340	4020
	50					2410	2610	2810	3020	3620

For remarks and the explanation of abbreviations, see inside of the last page.

560/60 - 22.5 IMP 167 A8 TL FLOTATION+

EAN		8714692220364				Section width		565 mm		
Nominal tyre pressure		2,8 bar				Overall diameter		1240 mm		
Tyre construction		Bias				Static loaded radius		550 mm		
Recommended rim width		AG 16.00				Rolling circumference		3700 mm		
EAN Tube		8714692335044				Tread depth		20 mm		
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,50
		LLV Load capacity per tyre (kg) HLW								
Speed (km/h)	10	3700	4260	4800	5340	5880	6450	7000	7500	9150
	25	3160	3620	4080	4540	5000	5460	5920	6400	7800
	30	2960	3400	3840	4280	4700	5140	5580	6000	7300
	40			3420	3820	4200	4600	4980	5380	6550
	50					3780	4140	4480	4840	5880

For remarks and the explanation of abbreviations, see inside of the last page.

600/55 - 22.5 IMP 168 A8 TL FLOTATION+

EAN		8714692220388		Section width		625 mm				
Nominal tyre pressure		2,8 bar		Overall diameter		1230 mm				
Tyre construction		Bias		Static loaded radius		550 mm				
Recommended rim width		AG 20.00		Rolling circumference		3700 mm				
				Tread depth		20 mm				
EAN Tube		8714692335037								
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,50
		Load capacity per tyre (kg)								
		LLV								HLV
Speed (km/h)	10	3800	4360	4920	5480	6050	6600	7150	7750	9400
	25	3240	3720	4180	4660	5140	5620	6100	6550	8000
	30	3040	3500	3940	4400	4840	5280	5740	6200	7550
	40			3520	3920	4320	4720	5120	5520	6700
	50					3880	4240	4600	4960	6050

For remarks and the explanation of abbreviations, see inside of the last page.

710/45 - 22.5 IMP 171 A8 TL FLOTATION+

EAN		8714692220401				Section width				730 mm
Nominal tyre pressure		2,8 bar				Overall diameter				1240 mm
Tyre construction		Bias				Static loaded radius				550 mm
Recommended rim width		AG 24.00				Rolling circumference				3700 mm
						Tread depth				20 mm
EAN Tube		8714692335020								
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,50
		LLV Load capacity per tyre (kg) HLV								
Speed (km/h)	10	4180	4800	5420	6050	6650	7250	7850	8500	10350
	25	3560	4080	4600	5120	5640	6150	6700	7200	8800
	30	3340	3840	4320	4820	5320	5800	6300	6800	8250
	40			3860	4300	4740	5180	5620	6050	7400
	50					4260	4660	5060	5460	6650

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS



A.W.

FOR GRASSLAND & ARABLE MACHINES

FEATURES	BENEFITS
Strong, flexible nylon carcass	High load capacity at low inflation pressure
Longitudinal tread profile	Good sideways stability
Genuine tread width	Reduced damage to the soil



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
12	7.00 - 12 IMP		2,5	4.25	200	705	315	2050	182
	10.0/80 - 12 IMP	116 A8	3,1	7.00	265	725	330	2185	182
15.3	10.0/75 - 15.3 IMP	123 A8	3,9	9.00	270	775	355	2335	183
	10.0/75 - 15.3 IMP	130 A8	5,5	9.00	270	775	355	2335	183
	11.5/80 - 15.3 IMP	131 A8	3,4	9.00	310	850	385	2560	184
	11.5/80 - 15.3 IMP	139 A8	4,8	9.00	310	850	385	2560	184
	12.5/80 - 15.3 IMP	142 A8	4,3	9.00	320	885	405	2660	185
16	13.0/75 - 16 IMP	135 A8	3,0	11	345	905	405	2725	185
430.9	13.5/75 - 430.9 IMP	145 A8	4,0	11	360	960	435	2900	186
17	15.0/55 - 17 IMP	134 A8	2,6	13.00	385	865	390	2580	186
	19.0/45 - 17 IMP	138 A8	2,0	16.00	455	870	400	2620	187
	500/50 - 17 IMP	140 A8	2,0	16.00	500	950	430	2890	187
18	12.5/80 - 18 IMP	142 A8	3,7	11	340	975	450	2985	188
	15.0/70 - 18 IMP	151 A8	4,3	13	395	1000	460	3030	188

For the explanation of the symbols and abbreviations, see the inside of the last page.



IMPLEMENT BIAS

7.00 - 12 6 PR IMP TT A.W.

EAN		8714692082238			Section width		200 mm		
Nominal tyre pressure		2,5 bar			Overall diameter		705 mm		
Tyre construction		Bias			Static loaded radius		315 mm		
Recommended rim width		4.25			Rolling circumference		2050 mm		
Permitted rim width					Tread depth		7 mm		
EAN Tube		8714692238987							
		Tyre pressure (bar)							
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	3,50
		LLV							HLV
		Load capacity per tyre (kg)							
Speed (km/h)	10	560	640	710	780	840	900	960	1170
	25	475	545	605	660	715	765	815	995
	30	450	510	570	625	675	720	765	935
	40			510	555	600	645	685	835
	50				500	540	580	615	750

For remarks and the explanation of abbreviations, see inside of the last page.

10.0/80 - 12 IMP 116 A8 TL A.W.

EAN		8714692262883				Section width		265 mm			
Nominal tyre pressure		3,1 bar				Overall diameter		725 mm			
Tyre construction		Bias				Static loaded radius		330 mm			
Recommended rim width		7.00				Rolling circumference		2185 mm			
Permitted rim width						Tread depth		10 mm			
EAN Tube		8714692238994									
		Tyre pressure (bar)									
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	4,00
		Load capacity per tyre (kg)									
		LLV									
Speed (km/h)	10	910	1040	1160	1260	1370	1470	1560	1650	1730	2050
	25	775	885	980	1070	1160	1250	1320	1400	1470	1740
	30	730	830	925	1010	1090	1170	1250	1320	1390	1640
	40			825	905	975	1050	1110	1180	1240	1470
	50				815	880	940	1000	1060	1110	1320

For remarks and the explanation of abbreviations, see inside of the last page.

10.0/75 - 15.3 IMP 123 A8 TL A.W.

EAN		8714692262876			Section width		270 mm		
Nominal tyre pressure		3,9 bar			Overall diameter		775 mm		
Tyre construction		Bias			Static loaded radius		355 mm		
Recommended rim width		9.00			Rolling circumference		2335 mm		
Permitted rim width					Tread depth		8 mm		
EAN Tube		8714692239007							
		Tyre pressure (bar)							
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	5,25
		LLV Load capacity per tyre (kg)							HLV
Speed (km/h)	10	970	1230	1460	1660	1850	2020	2190	2560
	25	825	1050	1240	1410	1570	1720	1860	2180
	30	775	985	1170	1330	1480	1620	1750	2050
	40		880	1040	1190	1320	1440	1560	1830
	50			935	1070	1190	1300	1410	1650

For remarks and the explanation of abbreviations, see inside of the last page.

10.0/75 - 15.3 IMP 130 A8 TL A.W.

EAN		8714692309823				Section width				270 mm		
Nominal tyre pressure		5,5 bar				Overall diameter				775 mm		
Tyre construction		Bias				Static loaded radius				355 mm		
Recommended rim width		9.00				Rolling circumference				2335 mm		
Permitted rim width						Tread depth				8 mm		
EAN Tube		8714692239007										
		Tyre pressure (bar)										
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	7,50
		LLV Load capacity per tyre (kg) HLV										
Speed (km/h)	10	990	1250	1480	1690	1880	2060	2220	2380	2530	2680	3220
	25	840	1060	1260	1440	1600	1750	1890	2020	2150	2280	2730
	30	790	1000	1190	1350	1500	1640	1780	1910	2030	2140	2570
	40			1060	1210	1340	1470	1590	1700	1810	1910	2290
	50				1090	1210	1320	1430	1530	1630	1720	2060

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS

11.5/80 - 15.3 IMP 131 A8 TL A.W.

EAN		8714692263187				Section width				310 mm					
Nominal tyre pressure		3,4 bar				Overall diameter				850 mm					
Tyre construction		Bias				Static loaded radius				385 mm					
Recommended rim width		9.00				Rolling circumference				2560 mm					
Permitted rim width						Tread depth				10 mm					
EAN Tube		8714692239014													
		Tyre pressure (bar)													
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	3,25	3,50	4,75		
		Load capacity per tyre (kg)													
		LLV													
Speed (km/h)	10	1330	1510	1680	1840	1990	2130	2270	2400	2530	2650	2760	3300		
	25	1130	1290	1430	1570	1690	1810	1930	2040	2150	2250	2350	2810		
	30	1060	1210	1350	1470	1590	1710	1820	1920	2020	2120	2210	2640		
	40			1200	1320	1420	1520	1620	1710	1800	1890	1970	2360		
	50				1180	1280	1370	1460	1540	1620	1700	1780	2120		

For remarks and the explanation of abbreviations, see inside of the last page.

11.5/80 - 15.3 IMP 139 A8 TL AW

EAN		8714692309847				Section width		310 mm			
Nominal tyre pressure		4,8 bar				Overall diameter		850 mm			
Tyre construction		Bias				Static loaded radius		385 mm			
Recommended rim width		9.00				Rolling circumference		2560 mm			
Permitted rim width						Tread depth		10 mm			
EAN Tube		8714692239014									
		Tyre pressure (bar)									
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	6,50
		Load capacity per tyre (kg)									
		LLV									
Speed (km/h)	10	1380	1750	2070	2360	2630	2870	3100	3320	3540	4120
	25	1170	1490	1760	2010	2230	2440	2640	2830	3000	3500
	30	1100	1400	1660	1890	2100	2300	2490	2660	2830	3300
	40			1480	1690	1880	2050	2220	2380	2530	2950
	50				1520	1690	1850	2000	2140	2280	2650

For remarks and the explanation of abbreviations, see inside of the last page.

12.5/80 - 15.3 IMP 142 A8 TL A.W. SPECIAL

EAN		8714692263255				Section width		320 mm		
Nominal tyre pressure		4,3 bar				Overall diameter		885 mm		
Tyre construction		Bias				Static loaded radius		405 mm		
Recommended rim width		9.00				Rolling circumference		2660 mm		
Permitted rim width						Tread depth		11 mm		
EAN Tube		8714692239021								
		Tyre pressure (bar)								
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,25	5,75
		LLV								
		Load capacity per tyre (kg)								
		HLV								
Speed (km/h)	10	1570	1980	2350	2680	2980	3260	3520	3640	4360
	25	1330	1690	2000	2270	2530	2770	2990	3100	3700
	30	1250	1590	1880	2140	2380	2610	2820	2920	3480
	40		1420	1680	1910	2130	2330	2520	2610	3120
	50			1510	1720	1910	2090	2260	2350	2800

For remarks and the explanation of abbreviations, see inside of the last page.

13.0/75 - 16 IMP 135 A8 TL A.W.

EAN		8714692263279				Section width				345 mm	
Nominal tyre pressure		3,0 bar				Overall diameter				905 mm	
Tyre construction		Bias				Static loaded radius				405 mm	
Recommended rim width		11				Rolling circumference				2725 mm	
Permitted rim width						Tread depth				12 mm	
EAN Tube		8714692239045									
		Tyre pressure (bar)									
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	4,00
		Load capacity per tyre (kg)									
		LLV									
Speed (km/h)	10	1630	1860	2070	2260	2450	2620	2790	2950	3100	3680
	25	1390	1580	1760	1920	2080	2230	2370	2510	2640	3120
	30	1300	1490	1650	1810	1960	2100	2230	2360	2480	2940
	40			1480	1620	1750	1870	1990	2110	2220	2620
	50				1450	1570	1690	1790	1890	1990	2360

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS

13.5/75 - 430.9 IMP 145 A8 TL A.W. SPECIAL

EAN		8714692263286			Section width		360 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		960 mm		
Tyre construction		Bias			Static loaded radius		435 mm		
Recommended rim width		11			Rolling circumference		2900 mm		
Permitted rim width					Tread depth		12 mm		
EAN Tube		8714692239052							
		Tyre pressure (bar)							
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	5,50
		LLV							HLV
		Load capacity per tyre (kg)							
		LLV							
Speed (km/h)	10	1800	2290	2710	3080	3440	3760	4060	4900
	25	1530	1940	2300	2620	2920	3200	3460	4160
	30	1440	1830	2170	2470	2750	3000	3240	3920
	40		1630	1930	2200	2450	2680	2900	3500
	50			1740	1980	2210	2410	2610	3140

For remarks and the explanation of abbreviations, see inside of the last page.

15.0/55 - 17 IMP 134 A8 TL AW

EAN		8714692263293				Section width		385 mm			
Nominal tyre pressure		2,6 bar				Overall diameter		865 mm			
Tyre construction		Bias				Static loaded radius		390 mm			
Recommended rim width		13.00				Rolling circumference		2580 mm			
Permitted rim width						Tread depth		12 mm			
EAN Tube		8714692239069									
		Tyre pressure (bar)									
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	3,60
		Load capacity per tyre (kg)									
		LLV									
Speed (km/h)	10	1530	1720	1910	2105	2250	2435	2625	2810	2970	3775
	25	1300	1465	1625	1790	1910	2070	2230	2390	2525	3210
	30	1225	1375	1530	1680	1800	1950	2100	2250	2375	3020
	40			1365	1500	1605	1740	1875	2005	2120	2695
	50					1445	1565	1685	1805	1910	2425

For remarks and the explanation of abbreviations, see inside of the last page.

19.0/45 - 17 IMP 138 A8 TL A.W.

EAN		8714692263316			Section width		455 mm
Nominal tyre pressure		2,0 bar			Overall diameter		870 mm
Tyre construction		Bias			Static loaded radius		400 mm
Recommended rim width		16.00			Rolling circumference		2620 mm
Permitted rim width					Tread depth		12 mm
EAN Tube		8714692239076					
		Tyre pressure (bar)					
		1,00	1,25	1,50	1,75	2,00	2,75
		LLV					HLV
		Load capacity per tyre (kg)					
Speed (km/h)	10	2210	2520	2810	3080	3320	4000
	25	1880	2140	2390	2610	2820	3400
	30	1770	2020	2250	2460	2660	3200
	40			2000	2190	2370	2860
	50				1970	2140	2570

For remarks and the explanation of abbreviations, see inside of the last page.

500/50 - 17 IMP 140 A8 TL A.W.

EAN		8714692263323			Section width		500 mm
Nominal tyre pressure		2,0 bar			Overall diameter		950 mm
Tyre construction		Bias			Static loaded radius		430 mm
Recommended rim width		16.00			Rolling circumference		2890 mm
Permitted rim width					Tread depth		12 mm
EAN Tube		8714692239083					
		Tyre pressure (bar)					
		1,00	1,25	1,50	1,75	2,00	2,50
		LLV					HLV
		Load capacity per tyre (kg)					
Speed (km/h)	10	2150	2490	2830	3160	3500	4180
	25	1830	2120	2400	2690	2980	3540
	30	1720	1990	2260	2530	2800	3340
	40			2020	2260	2500	2980
	50					2250	2680

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS

12.5/80 - 18 IMP 142 A8 TL A.W.

EAN	8714692263262	Section width	340 mm						
Nominal tyre pressure	3,7 bar	Overall diameter	975 mm						
Tyre construction	Bias	Static loaded radius	450 mm						
Recommended rim width	11	Rolling circumference	2985 mm						
Permitted rim width		Tread depth	11 mm						
EAN Tube	8714692239090								
		Tyre pressure (bar)							
		1,00	1,50	2,00	2,50	3,00	3,50	3,75	5,00
		LLV							
		Load capacity per tyre (kg)							
		HLV							
Speed (km/h)	10	1760	2230	2640	2950	3280	3590	3710	4520
	25	1500	1900	2240	2510	2790	3055	3155	3840
	30	1410	1780	2110	2360	2625	2875	2970	3600
	40		1590	1890	2105	2345	2565	2650	3220
	50			1700	1895	2110	2310	2385	2900

For remarks and the explanation of abbreviations, see inside of the last page.

15.0/70 - 18 IMP 151 A8 TL A.W.

EAN		8714692263309			Section width		395 mm			
Nominal tyre pressure		4,3 bar			Overall diameter		1000 mm			
Tyre construction		Bias			Static loaded radius		460 mm			
Recommended rim width		13			Rolling circumference		3030 mm			
Permitted rim width					Tread depth		13 mm			
EAN Tube		8714692239106								
		Tyre pressure (bar)								
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,25	5,75
		LLV								
		Load capacity per tyre (kg)								
		LLV								
Speed (km/h)	10	2090	2650	3140	3560	3980	4340	4700	4860	5820
	25	1780	2250	2660	3040	3380	3700	4000	4140	4940
	30	1670	2120	2510	2860	3180	3480	3760	3900	4640
	40		1890	2240	2550	2840	3100	3360	3480	4160
	50			2010	2290	2550	2790	3020	3140	3740

For remarks and the explanation of abbreviations, see inside of the last page.



IMPLEMENT BIAS



A.S.

COMFORT AND TRACTION ASSURED

FEATURES	BENEFITS
Sturdy diagonal carcass construction	Excellent stability and high load capacity
Special tread	High traction power
Large cleat surface	Long lifespan

Ø	Tyre size	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
12	7.00 - 12 IMP	95 A8	2,5	4.25	185	685	315	2085	2085	192
15.3	10.0/75 - 15.3 IMP	123 A8	3,9	9.00	260	790	355	2400	2400	192
	11.5/80 - 15.3 IMP	135 A8	4,1	9.00	300	885	385	2675	2675	193
17	15.0/55 - 17 IMP	134 A8	2,6	13.00	380	895	390	2670	2670	193

For the explanation of the symbols and abbreviations, see the inside of the last page.



IMPLEMENT BIAS

7.00 - 12 6 PR IMP 95 A8 TL A.S.

EAN		8714692045172			Section width		185 mm		
Nominal tyre pressure		2,5 bar			Overall diameter		685 mm		
Tyre construction		Bias			Static loaded radius		315 mm		
Recommended rim width		4.25			Rolling circumference		2085 mm		
Permitted rim width					Tread depth		17 mm		
EAN Tube		8714692238987							
		Tyre pressure (bar)							
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	3,50
		LLV							HLV
		Load capacity per tyre (kg)							
Speed (km/h)	10	560	640	710	780	840	900	960	1170
	25	475	545	605	660	715	765	815	995
	30	450	510	570	625	675	720	765	935
	40			510	555	600	645	685	835
	50				500	540	580	615	750

For remarks and the explanation of abbreviations, see inside of the last page.

10.0/75 - 15.3 10 PR IMP 123 A8 TL A.S.

EAN		8714692045196			Section width		260 mm		
Nominal tyre pressure		3,9 bar			Overall diameter		790 mm		
Tyre construction		Bias			Static loaded radius		355 mm		
Recommended rim width		9.00			Rolling circumference		2400 mm		
Permitted rim width					Tread depth		22 mm		
EAN Tube		8714692239007							
		Tyre pressure (bar)							
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	5,25
		LLV							HLV
		Load capacity per tyre (kg)							
		LLV							
Speed (km/h)	10	970	1230	1460	1660	1850	2020	2190	2560
	25	825	1050	1240	1410	1570	1720	1860	2180
	30	775	985	1170	1330	1480	1620	1750	2050
	40		880	1040	1190	1320	1440	1560	1830
	50			935	1070	1190	1300	1410	1650

For remarks and the explanation of abbreviations, see inside of the last page.

11.5/80 - 15.3 12 PR IMP 135 A8 TL A.S.

EAN		8714692045240			Section width		300 mm		
Nominal tyre pressure		4,1 bar			Overall diameter		885 mm		
Tyre construction		Bias			Static loaded radius		385 mm		
Recommended rim width		9.00			Rolling circumference		2675 mm		
Permitted rim width					Tread depth		23 mm		
EAN Tube		8714692239014							
		Tyre pressure (bar)							
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	5,50
		LLV							HLV
		Load capacity per tyre (kg)							
		LLV							
Speed (km/h)	10	1350	1710	2030	2310	2570	2810	3040	3660
	25	1150	1460	1720	1960	2180	2390	2580	3120
	30	1080	1370	1620	1850	2050	2250	2430	2930
	40		1220	1450	1650	1830	2010	2170	2620
	50			1300	1480	1650	1810	1950	2350

For remarks and the explanation of abbreviations, see inside of the last page.

15.0/55-17 IMP TL 134 A8 (10 PR) A.S.

EAN		8714692105869				Section width		380 mm			
Nominal tyre pressure		2,6 bar				Overall diameter		895 mm			
Tyre construction		Bias				Static loaded radius		390 mm			
Recommended rim width		13.00				Rolling circumference		2670 mm			
Permitted rim width						Tread depth		22 mm			
EAN Tube		8714692239069									
		Tyre pressure (bar)									
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	3,60
		Load capacity per tyre (kg)									
		LLV									
		HLV									
Speed (km/h)	10	1530	1720	1910	2105	2250	2435	2625	2810	2970	3775
	25	1300	1465	1625	1790	1910	2070	2230	2390	2525	3210
	30	1225	1375	1530	1680	1800	1950	2100	2250	2375	3020
	40			1365	1500	1605	1740	1875	2005	2120	2695
	50					1445	1565	1685	1805	1910	2425

For remarks and the explanation of abbreviations, see inside of the last page.

IMPLEMENT BIAS



V61

FOR PROFESSIONAL
CULTIVATION MACHINERY

FEATURES	BENEFITS
Robust tread	Highly resistant to punctures
Strong nylon carcass	Long lifespan
Tubeless	Easy to fit

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
14.5	200/60 - 14.5 IMP	106 A8	5,0	AG 6.75	210	615	295	1880	194
	250/65 - 14.5 IMP	121 A8	3,6	AG 8.00	245	680	320	2060	194

For the explanation of the symbols and abbreviations, see the inside of the last page.

200/60 - 14.5 IMP 106 A8 TL V61

EAN		8714692105890				Section width				210 mm		
Nominal tyre pressure		5,0 bar				Overall diameter				615 mm		
Tyre construction		Bias				Static loaded radius				295 mm		
Recommended rim width		AG 6.75				Rolling circumference				1880 mm		
						Tread depth				9 mm		
EAN Tube		8714692238970										
		Tyre pressure (bar)										
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	6,00	
		Load capacity per tyre (kg)										
		LLV										HLV
Speed (km/h)	10	385	510	630	750	870	990	1110	1230	1350	1600	
	25	330	430	535	635	740	845	945	1050	1150	1360	
	30	310	405	505	600	695	795	890	985	1080	1280	
	40		365	450	535	620	710	795	880	970	1140	
	50			405	480	560	640	715	795	870	1030	

For remarks and the explanation of abbreviations, see inside of the last page.

250/65 - 14.5 IMP 121 A8 TL V61

EAN				8714692220449		Section width				245 mm	
Nominal tyre pressure				3,6 bar		Overall diameter				680 mm	
Tyre construction				Bias		Static loaded radius				320 mm	
Recommended rim width				AG 8.00		Rolling circumference				2060 mm	
						Tread depth				9 mm	
EAN Tube				8714692238970							
		Tyre pressure (bar)									
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,60	4,40	
		LLV									HLV
		Load capacity per tyre (kg)									
Speed (km/h)	10	710	915	1120	1320	1520	1730	1930	2030	2440	
	25	605	775	950	1120	1290	1470	1640	1730	2070	
	30	570	730	895	1060	1220	1380	1540	1620	1950	
	40		650	795	940	1090	1230	1380	1450	1740	
	50			720	850	980	1110	1240	1300	1570	

For remarks and the explanation of abbreviations, see inside of the last page.



GREENTRAX

CUT THE COSTS, KEEP IT GREEN

The ideal tyre for professional
lawnmowers

Raised cleats for high traction
and minimal wear



REDESTEIN

YOUR PERFORMANCE TYRES SINCE 1909



SMALL TYRES

AGRICULTURAL

pag.

V50	198
V60	199
V61	199
V64	200
V64+	200
V67	200

LAWN- AND GROUNDSCAPE

Greentrax	208
V71	209
V88	209

UTILITY

V20	214
V25	214
V40	215
V52	215
V76	216

FAST TRAILER

V47	222
V48	222
V49	223
V54	223
V71	224
V90	224



SMALL TYRES AGRICULTURAL



V50

DESIGNED AS FURROW
WHEEL ON PLOUGHS

FEATURES	BENEFITS
Smooth tread	Tyre never becomes clogged
Available in high ply rating	Suitable for heavy applications
Smooth sidewall	Shakes off clinging soil





V60

THE TYRE FOR GRASSLAND &
HORTICULTURE

FEATURES	BENEFITS
Wide lateral grooves	Good sideways stability
Rounded contour	Prevents damage to the turf
Sturdy carcass	Long lifespan



V61

FOR PROFESSIONAL
CULTIVATION MACHINERY

FEATURES	BENEFITS
Robust tread	Highly resistant to punctures
Strong nylon carcass	Long lifespan
Tubeless	Easy to fit



SMALL TYRES AGRICULTURAL



V64/V64+

THE STANDARD FOR
EFFICIENT HAY MAKING

FEATURES	BENEFITS
Extra thick tread	Puncture resistant and long lifespan
Rounded shoulders	Prevents damage to the turf
Wide tread & flat contour	Minimal rutting



V67

THE IDEAL TRACTION TYRE FOR
MARKET GARDENING

FEATURES	BENEFITS
Traction tread with narrow cleats	Excellent grip
Special shape of the cleats	Perfect self-cleaning
Drive/non drive load indication	Load capacity for every application

Profil	Tyre size	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	Page
V50	5.00 - 8	10	66 A6	6,0	3.00D	130	455	202
V50	6.00 - 9	10	94 A6	5,0	4.00 E	165	445	202
V60	3.00 - 4	4	30 A6	3,5	2.10	90	275	202
V60	4.00 - 4	4	43 A6	2,8	2.10	100	315	202
V60	3.50 - 6	4	45 A6	3,0	2.50A	100	355	202
V60	3.50 - 8	4	52 A6	3,0	2.50A	100	395	203
V60	4.00 - 8	4	57 A6	2,8	2.50A	105	425	203
V61	15x 6.00 - 6	4	61 A6	2,5	4.50A	160	380	203
V61	170/60 - 8	6	71 A6	3,0	5.50 A	170	425	203
V61	18x 8.50 - 8	4	77 A6	2,0	7.00 I	210	465	203
V61	18x 8.50 - 8	6	85 A6	3,0	7.00 I	210	465	204
V64	3.50 - 6	4	45 A6	3,0	2.50A	100	355	204
V64+	160/65 - 6		60 A8	2,4	4.50A	160	365	204
V64+	160/65 - 6		66 A8	3,2	4.50A	160	365	204
V64	3.50 - 8	4	52 A6	3,0	2.50A	100	395	204
V64+	170/60 - 8		65 A8	2,4	5.50 A	170	410	205
V64+	170/60 - 8		71 A8	3,2	5.50 A	170	410	205
V64+	210/60 - 8		83 A8	3,2	7.00 I	215	455	205
V67	3.00 - 4	4	30 A6	3,5	2.10	90	275	205
V67	4.00 - 4	4	43 A6	5,0	2.50 C x 4	110	305	205
V67	3.50 - 6	4	45 A6	3,0	2.50A	100	355	206
V67	3.50 - 8	4	52 A6	3,0	2.50A	100	395	206
V67	4.00 - 8	4	57 A6	2,8	2.50A	105	425	206
V67	4.00 - 12	4	66 A6	2,75	3.00 D	110	515	206

For the explanation of the symbols and abbreviations, see the inside of the last page.

SMALL TYRES AGRICULTURAL

5.00 - 8 10 PR 66 A6 TT V50

EAN	8714692081989	Section width	130 mm
Nominal tyre pressure	6,0 bar	Overall diameter	455 mm
Tyre construction	Bias	Load capacity at 10 km/h	390 kg
Recommended rim width	3.00D	Load capacity at 30 km/h	300 kg
Permitted rim width	3.50D	Load capacity at 40 km/h	270 kg
		EAN Tube	8714692285288

6.00 - 9 10 PR 94 A6 TT V50

EAN	8714692082177	Section width	165 mm
Nominal tyre pressure	5,0 bar	Overall diameter	540 mm
Tyre construction	Bias	Load capacity at 10 km/h	865 kg
Recommended rim width	4.00E	Load capacity at 30 km/h	670 kg
Permitted rim width	3.50D	Load capacity at 40 km/h	605 kg
		EAN Tube	8714692285325

3.00 - 4 4 PR 30 A6 TT V60

EAN	8714692081675	Section width	90 mm
Nominal tyre pressure	3,5 bar	Overall diameter	275 mm
Tyre construction	Bias	Load capacity at 10 km/h	135 kg
Recommended rim width	2.10	Load capacity at 30 km/h	105 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	95 kg
		EAN Tube	8714692285202

4.00 - 4 4 PR 43 A6 TT V60

EAN	8714692082047	Section width	100 mm
Nominal tyre pressure	2,8 bar	Overall diameter	315 mm
Tyre construction	Bias	Load capacity at 10 km/h	200 kg
Recommended rim width	2.10	Load capacity at 30 km/h	155 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h	140 kg
		EAN Tube	8714692285219

3.50 - 6 4 PR 45 A6 TT V60

EAN	8714692081705	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	355 mm
Tyre construction	Bias	Load capacity at 10 km/h	215 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	165 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	150 kg
		EAN Tube	8714692285226

3.50 - 8 4 PR 52 A6 TT V60

EAN	8714692081804	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	395 mm
Tyre construction	Bias	Load capacity at 10 km/h	260 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	200 kg
Permitted rim width	2.50 C	Load capacity at 40 km/h	180 kg
		EAN Tube	8714692285257

4.00 - 8 4 PR 57 A6 TT V60

EAN	8714692081767	Section width	105 mm
Nominal tyre pressure	2,8 bar	Overall diameter	425 mm
Tyre construction	Bias	Load capacity at 10 km/h	300 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	230 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h	210 kg
		EAN Tube	8714692285264

15x6.00 - 6 4 PR 61 A6 TT V61

EAN	8714692082139	Section width	160 mm
Nominal tyre pressure	2,5	Overall diameter	380 mm
Tyre construction	Bias	Load capacity at 10 km/h	340 kg
Recommended rim width	4.50A	Load capacity at 30 km/h	260 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h	230 kg
		EAN Tube	8714692285240

170/60 - 8 6 PR 71 A6 TT V61

EAN	8714692082160	Section width	170 mm
Nominal tyre pressure	3,0 bar	Overall diameter	425 mm
Tyre construction	Bias	Load capacity at 10 km/h	445 kg
Recommended rim width	5.50A	Load capacity at 30 km/h	345 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	270 kg
		EAN Tube	8714692285301

18x8.50 - 8 4 PR 77 A6 TT V61

EAN	8714692082443	Section width	210 mm
Nominal tyre pressure	2,0 bar	Overall diameter	465 mm
Tyre construction	Bias	Load capacity at 10 km/h	530 kg
Recommended rim width	7.00I	Load capacity at 30 km/h	410 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	370 kg
		EAN Tube	8714692285318



SMALL TYRES AGRICULTURAL

18x8.50 - 8 6 PR 85 A6 TL V61

EAN	8714692082351	Section width	210 mm
Nominal tyre pressure	3,0 bar	Overall diameter	465 mm
Tyre construction	Bias	Load capacity at 10 km/h	670 kg
Recommended rim width	7.00I	Load capacity at 30 km/h	520 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	465 kg
		EAN Tube	8714692285318

3.50 - 6 4 PR 45 A6 TT V64

EAN	8714692081620	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	355 mm
Tyre construction	Bias	Load capacity at 10 km/h	215 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	165 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	150 kg
		EAN Tube	8714692285226

160/65 - 6 60 A8 TT V64+

EAN	8714692256424	Section width	160 mm
Nominal tyre pressure	2,4 bar	Overall diameter	365 mm
Tyre construction	Bias	Load capacity at 10 km/h	350 kg
Recommended rim width	4.50A	Load capacity at 30 km/h	280 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	250 kg
		EAN Tube	8714692285240

160/65 - 6 66 A8 TT V64+

EAN	8714692244490	Section width	160 mm
Nominal tyre pressure	3,2 bar	Overall diameter	365 mm
Tyre construction	Bias	Load capacity at 10 km/h	420 kg
Recommended rim width	4.50A	Load capacity at 30 km/h	335 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	300 kg
		EAN Tube	8714692285240

3.50 - 8 4 PR 52 A6 TT V64

EAN	8714692081811	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	395 mm
Tyre construction	Bias	Load capacity at 10 km/h	260 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	200 kg
Permitted rim width	2.50 C	Load capacity at 40 km/h	180 kg
		EAN Tube	8714692285257

V61/V64/V64+/V67

170/60 - 8 65 A8 TT V64+

EAN	8714692256462	Section width	170 mm
Nominal tyre pressure	2,4 bar	Overall diameter	410 mm
Tyre construction	Bias	Load capacity at 10 km/h	405 kg
Recommended rim width	5.50A	Load capacity at 30 km/h	325 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	290 kg
		EAN Tube	8714692285301

170/60 - 8 71 A8 TT V64+

EAN	8714692256462	Section width	170 mm
Nominal tyre pressure	3,2 bar	Overall diameter	410 mm
Tyre construction	Bias	Load capacity at 10 km/h	485 kg
Recommended rim width	5.50A	Load capacity at 30 km/h	385 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	345 kg
		EAN Tube	8714692285301

210/60 - 8 83 A8 TT V64+

EAN	8714692244513	Section width	215 mm
Nominal tyre pressure	3,2 bar	Overall diameter	455 mm
Tyre construction	Bias	Load capacity at 10 km/h	680 kg
Recommended rim width	7.00I	Load capacity at 30 km/h	545 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	485 kg
		EAN Tube	8714692285318

3.00 - 4 4 PR 30 A6 TT V67

EAN	8714692081682	Section width	90 mm
Nominal tyre pressure	3,5 bar	Overall diameter	275 mm
Tyre construction	Bias	Load capacity at 10 km/h**	135 kg
Recommended rim width	2.10	Load capacity at 30 km/h**	105 kg
Permitted rim width	2.50C	Load capacity at 40 km/h**	95 kg
		EAN Tube	8714692285202

4.00 - 4 4 PR 43 A6 TT V67

EAN	8714692082054	Section width	110 mm
Nominal tyre pressure	2,8 bar	Overall diameter	305 mm
Tyre construction	Bias	Load capacity at 10 km/h**	200 kg
Recommended rim width	2.10	Load capacity at 30 km/h**	155 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h**	140 kg
		EAN Tube	8714692285219



SMALL TYRES AGRICULTURAL

3.50 - 6 4 PR 45 A6 TT V67

EAN	8714692081712	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	355 mm
Tyre construction	Bias	Load capacity at 10 km/h**	215 kg
Recommended rim width	2.50A	Load capacity at 30 km/h**	165 kg
Permitted rim width	2.50C	Load capacity at 40 km/h**	150 kg
		EAN Tube	8714692285226

3.50 - 8 4 PR 52 A6 TT V67

EAN	8714692081828	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	395 mm
Tyre construction	Bias	Load capacity at 10 km/h**	260 kg
Recommended rim width	2.50A	Load capacity at 30 km/h**	200 kg
Permitted rim width	2.50 C	Load capacity at 40 km/h**	180 kg
		EAN Tube	8714692285257

4.00 - 8 4 PR 57 A6 TT V67

EAN	8714692081842	Section width	105 mm
Nominal tyre pressure	2,8 bar	Overall diameter	425 mm
Tyre construction	Bias	Load capacity at 10 km/h**	300 kg
Recommended rim width	2.50A	Load capacity at 30 km/h**	230 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h**	210 kg
		EAN Tube	8714692285264

4.00 - 12 4 PR 66 A6 TT V67

EAN	8714692082122	Section width	110 mm
Nominal tyre pressure	2,8 bar	Overall diameter	515 mm
Tyre construction	Bias	Load capacity at 10 km/h**	390 kg
Recommended rim width	3.00D	Load capacity at 30 km/h**	300 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h**	270 kg
		EAN Tube	8714692285356



LAWN- AND GROUNDS CARE



GREENTRAX

CUT THE COSTS, KEEP IT GREEN

FEATURES	BENEFITS
High rubber to air ratio in the tread	Wear resistant and durable
Stable central section	Stable on course and comfortable to drive
Raised cleats in the shoulder area	High traction, minimal wear





V71

FOR SMALL MACHINES AND TOOLS

FEATURES	BENEFITS
Special lawn tread	Lawn friendly
Flexible carcass construction	Comfortable ride
Relatively large contact surface	Minimal rutting



V88

KIND TO THE LAWN WHILE PROVIDING
SUFFICIENT TRACTION

FEATURES	BENEFITS
Large and flat contact area	Minimal rutting
Rounded shoulders	Avoids damage to the grass
Flexible sidewall construction	Excellent shock absorption



LAWN- AND GROUNDSCAPE

Profil	Tyre size	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Page
Greentrax	160/65 - 6 IMP (16x6.00-6)		60 A8	2,4	4.50 A	155	365	160*	1.085*	211
Greentrax	170/60 - 8 IMP (16x6.50-8)		65 A8	2,4	5.50 A	170	410	185*	1.225*	211
Greentrax	210/60 - 8 IMP (18x8.50-8)		76 A8	2,4	7.00 I	215	455	205*	1.365*	211
Greentrax	250/50 - 8 IMP (18x9.50-8)		90 A8	2,4	7.00 I	240	455	205*	1.360*	211
Greentrax	250/60 - 8 IMP (20x10.00-8)		96 A8	2,4	7.00 I	245	505	225*	1.565*	211
Greentrax	210/60 - 10 IMP (20x8.00-10)		87 A8	2,4	6.00 I	205	505	225*	1.510*	212
Greentrax	250/50 - 10 IMP (20x10.00-10)		97 A8	2,4	8.50 I	255	505	230*	1.555*	212
Greentrax	270/50 - 12 IMP (23x10.50-12)		103 A8	2,4	8.50 I	265	580	265*	1.740*	212
Greentrax	320/45 - 12 IMP (24x13.00-12)		110 A8	2,4	10.50 I	320	600	275*	1.825*	212
Greentrax	320/55 - 12 IMP (26x12.00-12)		116 A8	2,4	10.50 I	320	655	300*	1.965*	212
V71	170/60 - 8 (16x6.50-8)	4		2,0	5.50 A	175	430			213
V88	18x 8.50 - 8	4		2,0	7.00 I	210	465			213
V88	18x 8.50 - 8	6		3,0	7.00 I	210	465			213

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values

160/65 - 6 IMP 60 A8 / 48 A8 TL GREENTRAX

EAN	8714692274114	Section width	155 mm
Nominal tyre pressure	2,4 bar	Overall diameter	365 mm
Tyre construction	Bias	Static loaded radius	160* mm
Recommended rim width	4.50A	Rolling circumference	1.085* mm
		Load capacity at 10 km/h**	350 kg
Alternative size description(s)	15x6.00 - 6	Load capacity at 30 km/h**	280 kg
EAN Tube	8714692238857	Load capacity at 40 km/h**	250 kg

170/60 - 8 IMP 65 A8 / 53 A8 TL GREENTRAX

EAN	8714692274121	Section width	170 mm
Nominal tyre pressure	2,4 bar	Overall diameter	410 mm
Tyre construction	Bias	Static loaded radius	185* mm
Recommended rim width	5.50A	Rolling circumference	1225* mm
Permitted rim width	5.375I	Load capacity at 10 km/h**	405 kg
Alternative size description(s)	16x6.50 - 8	Load capacity at 30 km/h**	325 kg
EAN Tube	8714692238918	Load capacity at 40 km/h**	290 kg

210/60 - 8 IMP 76 A8 / 64 A8 TL GREENTRAX

EAN	8714692274138	Section width	215 mm
Nominal tyre pressure	2,4 bar	Overall diameter	455 mm
Tyre construction	Bias	Static loaded radius	205* mm
Recommended rim width	7.00I	Rolling circumference	1365* mm
		Load capacity at 10 km/h**	560 kg
Alternative size description(s)	18x8.50 - 8	Load capacity at 30 km/h**	450 kg
EAN Tube	8714692238925	Load capacity at 40 km/h**	400 kg

250/50 - 8 IMP 90 A8 / 78 A8 TL GREENTRAX

EAN	8714692274145	Section width	240 mm
Nominal tyre pressure	2,4 bar	Overall diameter	455 mm
Tyre construction	Bias	Static loaded radius	205* mm
Recommended rim width	7.00I	Rolling circumference	1360* mm
		Load capacity at 10 km/h**	840 kg
Alternative size description(s)	18x9.50 - 8	Load capacity at 30 km/h**	670 kg
		Load capacity at 40 km/h**	600 kg

250/60 - 8 IMP 96 A8 / 84 A8 TL GREENTRAX

EAN	8714692274152	Section width	245 mm
Nominal tyre pressure	2,4 bar	Overall diameter	505 mm
Tyre construction	Bias	Static loaded radius	225* mm
Recommended rim width	7.00I	Rolling circumference	1565* mm
Permitted rim width	8.00I	Load capacity at 10 km/h**	995 kg
Alternative size description(s)	20x10.00 - 8	Load capacity at 30 km/h**	795 kg
		Load capacity at 40 km/h**	710 kg



LAWN- AND GROUNDSCARE

210/60 - 10 IMP 87 A8 / 75 A8 TL GREENTRAX

EAN	8714692274169	Section width	205 mm
Nominal tyre pressure	2,4 bar	Overall diameter	505 mm
Tyre construction	Bias	Static loaded radius	225* mm
Recommended rim width	6.00l	Rolling circumference	1510* mm
		Load capacity at 10 km/h**	765 kg
Alternative size description(s)	20x8.00 - 10	Load capacity at 30 km/h**	610 kg
		Load capacity at 40 km/h**	545 kg

250/50 - 10 IMP 97 A8 / 85 A8 TL GREENTRAX

EAN	8714692274176	Section width	255 mm
Nominal tyre pressure	2,4 bar	Overall diameter	505 mm
Tyre construction	Bias	Static loaded radius	230* mm
Recommended rim width	8.50l	Rolling circumference	1555* mm
Permitted rim width	7.00l, 8.00l, 8.25	Load capacity at 10 km/h**	1020 kg
Alternative size description(s)	20x10.00 - 10	Load capacity at 30 km/h**	820 kg
		Load capacity at 40 km/h**	730 kg

270/50 - 12 IMP 103 A8 / 91 A8 TL GREENTRAX

EAN	8714692274183	Section width	265 mm
Nominal tyre pressure	2,4 bar	Overall diameter	580 mm
Tyre construction	Bias	Static loaded radius	265* mm
Recommended rim width	8.50l	Rolling circumference	1740* mm
Permitted rim width	7.00l, 7JA, 8.50JA	Load capacity at 10 km/h**	1225 kg
Alternative size description(s)	23x10.50 - 12	Load capacity at 30 km/h**	980 kg
		Load capacity at 40 km/h**	875 kg

320/45 - 12 IMP 110 A8 / 98 A8 TL GREENTRAX

EAN	8714692292224	Section width	320 mm
Nominal tyre pressure	2,4 bar	Overall diameter	600 mm
Tyre construction	Bias	Static loaded radius	275* mm
Recommended rim width	10.50l	Rolling circumference	1825* mm
Permitted rim width	9.50JA, 10.50JA	Load capacity at 10 km/h**	1485 kg
Alternative size description(s)	24x13.00 - 12	Load capacity at 30 km/h**	1185 kg
		Load capacity at 40 km/h**	1060 kg

320/55 - 12 IMP 116 A8 / 104 A8 TL GREENTRAX

EAN	8714692274190	Section width	320 mm
Nominal tyre pressure	2,4 bar	Overall diameter	655 mm
Tyre construction	Bias	Static loaded radius	300* mm
Recommended rim width	10.50l	Rolling circumference	1965* mm
Permitted rim width	8.50l, 8.50JA, 9.50JA, 10.50JA	Load capacity at 10 km/h**	1750 kg
		Load capacity at 30 km/h**	1400 kg
Alternative size description(s)	26x12.00 - 12	Load capacity at 40 km/h**	1250 kg

170/60 - 8 4 PR TT V71

EAN	8714692082115	Section width	175 mm
Nominal tyre pressure	2,0 bar	Overall diameter	430 mm
Tyre construction	Bias	Static loaded radius	N/A mm
Recommended rim width	5.50A	Rolling circumference	N/A mm
Permitted rim width	5.375I	Load capacity at 10 km/h**	345 kg
Alternative size description(s)	16x6.50 - 8	Load capacity at 30 km/h**	265 kg
EAN Tube	8714692238918	Load capacity at 40 km/h**	240 kg

18x8.50 - 8 4 PR TL V88

EAN	8714692082344	Section width	210 mm
Nominal tyre pressure	2,0 bar	Overall diameter	465 mm
Tyre construction	Bias	Static loaded radius	N/A mm
Recommended rim width	7.00I	Rolling circumference	N/A mm
		Load capacity at 10 km/h**	530 kg
		Load capacity at 30 km/h**	410 kg
EAN Tube	8714692238925	Load capacity at 40 km/h**	370 kg

18x8.50 - 8 6 PR TL V88

EAN	8714692082436	Section width	210 mm
Nominal tyre pressure	3,0 bar	Overall diameter	465 mm
Tyre construction	Bias	Static loaded radius	N/A mm
Recommended rim width	7.00I	Rolling circumference	N/A mm
		Load capacity at 10 km/h**	670 kg
		Load capacity at 30 km/h**	515 kg
EAN Tube	8714692238925	Load capacity at 40 km/h**	465 kg



SMALL TYRES UTILITY



V20

STRONG, TRIED AND TESTED

FEATURES	BENEFITS
Strong carcass	Long lifespan
Rounded contour	Excellent manoeuvrability
Tried and tested construction	Good price/quality ratio



V25

FOR PEDAL-CARTS AND HEAVY-DUTY
WHEELBARROWS

FEATURES	BENEFITS
Sturdy sidewall construction	High resistance to punctures
Strong carcass	High endurance
Robust tread	Good grip



V40

HIGH LOAD CAPACITY FOR
INTERNAL TRANSPORT

FEATURES	BENEFITS
All-round tread pattern Centre-contact zone Open shoulder tread	Suits a variety of applications Low rolling resistance Good stability



V52

FOR MOBILE HOMES AND
AGRICULTURAL EQUIPMENT

FEATURES	BENEFITS
Strong carcass Flat contour Optimised tread profile	Suitable for heavy loads Optimal pressure distribution in contact area Low rolling resistance



SMALL TYRES UTILITY



V76

MANOEUVRABILITY FOR
INTERNAL TRANSPORT

FEATURES	BENEFITS
“Cube” profile	Optimised for internal transport equipment
Flexible carcass	Absorbs excessive vibrations
Available in grey upon request	For warehouses, hospitals, supermarkets, etc.

Profil	Tyre size	PR	Nominal inflation pressure (bar)		Permitted rim width	 mm	 mm	Page
V20	200x 50	2	2,5	200 x 50		50	195	218
V20	260x 85	4	5,0	2.10 x 4	2.10 - 4	90	270	218
V20	4.00 - 4	4	5,0	2.50 C x 4	2.50 C - 4	110	305	218
V20	3.50 - 6	4	4,5	2.50 A x 6	2.50 A - 6	95	335	218
V20	2.25 - 8	4	3,5	1.75 x 8		70	335	218
V20	4.00 - 8	4	4,0	2.50 x 8	2.50 A - 8	105	415	218
V25	4.00 - 8	4	4,0	2.50 x 8	2.50 A - 8	105	415	219
V40	4.00 - 8	6	5,0	3.00 D - 8	2.50 C - 8	115	430	219
V40	4.00 - 8	8	6,5	3.00 D - 8	2.50 C - 8	115	430	219
V52	5.00 - 8	6	6,3	3.00 D - 8	3.50 D - 8	135	470	219
V52	5.00 - 8	8	7,0	3.00 D - 8	3.50 D - 8	135	470	219
V52	6.00 - 9	6	5,0	4.00 E - 9	4.00 E x 9	165	550	219
V52	6.00 - 9	10	7,0	4.00 E - 9		165	550	220
V76	260x 85	4	5,0	2.10 x 4	2.10 - 4	90	270	220
V76	260x 85	4	5,0	2.10 x 4	2.10 - 4	90	270	220
V76	260x 85	6	7,0	2.10 - 4		90	270	220
V76	4.10 / 3.50 - 4	4	5,0	2.10 x 4	2.50 C x 4, 2.50 C - 4	95	280	220
V76	4.00 - 4	4	2,8	2.50 C x 4	2.50 C - 4	110	305	220
V76	4.00 - 4	6	7,0	2.50 C - 4		110	305	221
V76	4.10 / 3.50 - 6	4	4,5	2.50 A x 6	2.50 A - 6	100	345	221
V76	4.80 / 4.00 - 8	4	4,5	2.50 A x 8	2.50 C - 8	115	435	222

For the explanation of the symbols and abbreviations, see the inside of the last page.



SMALL TYRES UTILITY

200x50 2 PR TT V20

EAN	8714692081965	Section width	50 mm
Nominal tyre pressure	2,5 bar	Overall diameter	195 mm
Tyre construction	Bias	Load capacity at 10 km/h	75 kg
Recommended rim width	200 x 50	Load capacity at 20 km/h	65 kg
		EAN Tube	8714692304644

260x85 4 PR TT V20

EAN	8714692081644	Section width	90 mm
Nominal tyre pressure	5,0 bar	Overall diameter	270 mm
Tyre construction	Bias	Load capacity at 10 km/h	210 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	185 kg
Permitted rim width	2.10 - 4	EAN Tube	8714692285202

4.00 - 4 4 PR TT V20

EAN	8714692081873	Section width	110 mm
Nominal tyre pressure	5,0 bar	Overall diameter	305 mm
Tyre construction	Bias	Load capacity at 10 km/h	300 kg
Recommended rim width	2.50C x 4	Load capacity at 20 km/h	265 kg
Permitted rim width	2.50 C - 4	EAN Tube	8714692285219

3.50 - 6 4 PR TT V20

EAN	8714692081699	Section width	95 mm
Nominal tyre pressure	4,5 bar	Overall diameter	335 mm
Tyre construction	Bias	Load capacity at 10 km/h	280 kg
Recommended rim width	2.50A x 6	Load capacity at 20 km/h	250 kg
Permitted rim width	2.50A - 6	EAN Tube	8714692285226

2.25 - 8 4 PR TT V20

EAN	8714692081835	Section width	70 mm
Nominal tyre pressure	3,5 bar	Overall diameter	335 mm
Tyre construction	Bias	Load capacity at 10 km/h	150 kg
Recommended rim width	1.75 x 8	Load capacity at 20 km/h	135 kg
		EAN Tube	8714692034855

4.00 - 8 4 PR TT V20

EAN	8714692081736	Section width	105 mm
Nominal tyre pressure	4,0 bar	Overall diameter	415 mm
Tyre construction	Bias	Load capacity at 10 km/h	400 kg
Recommended rim width	2.50 x 8	Load capacity at 20 km/h	355 kg
Permitted rim width	2.50A - 8	EAN Tube	8714692285264

4.00 - 8 4 PR TT V25

EAN	8714692081750	Section width	105 mm
Nominal tyre pressure	4,0 bar	Overall diameter	415 mm
Tyre construction	Bias	Load capacity at 10 km/h	400 kg
Recommended rim width	2.50 x 8	Load capacity at 20 km/h	355 kg
Permitted rim width	2.50A - 8	EAN Tube	8714692285264

4.00 - 8 6 PR TT V40

EAN	8714692081910	Section width	115 mm
Nominal tyre pressure	5,0 bar	Overall diameter	430 mm
Tyre construction	Bias	Load capacity at 10 km/h	600 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	530 kg
Permitted rim width	2.50C - 8	EAN Tube	8714692285271

4.00 - 8 8 PR TT V40

EAN	8714692081927	Section width	115 mm
Nominal tyre pressure	6,5 bar	Overall diameter	430 mm
Tyre construction	Bias	Load capacity at 10 km/h	710 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	630 kg
Permitted rim width	2.50C - 8	EAN Tube	8714692285271

5.00 - 8 6 PR TT V52

EAN	8714692081996	Section width	135 mm
Nominal tyre pressure	6,3 bar	Overall diameter	470 mm
Tyre construction	Bias	Load capacity at 10 km/h	820 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	725 kg
Permitted rim width	3.50D - 8	EAN Tube	8714692285295

5.00 - 8 8 PR TT V52

EAN	8714692082009	Section width	135 mm
Nominal tyre pressure	7,0 bar	Overall diameter	470 mm
Tyre construction	Bias	Load capacity at 10 km/h	925 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	820 kg
Permitted rim width	3.50D - 8	EAN Tube	8714692285295

6.00 - 9 6 PR TT V52

EAN	8714692082184	Section width	165 mm
Nominal tyre pressure	5,0 bar	Overall diameter	550 mm
Tyre construction	Bias	Load capacity at 10 km/h	1100 kg
Recommended rim width	4.00E - 9	Load capacity at 20 km/h	975 kg
Permitted rim width	4.00E x 9	EAN Tube	8714692285332



SMALL TYRES UTILITY

6.00 - 9 10 PR TT V52

EAN	8714692082191	Section width	165 mm
Nominal tyre pressure	7,0 bar	Overall diameter	550 mm
Tyre construction	Bias	Load capacity at 10 km/h	1300 kg
Recommended rim width	4.00E - 9	Load capacity at 20 km/h	1150 kg
		EAN Tube	8714692285332

260x85 4 PR TT V76

EAN	8714692081668	Section width	90 mm
Nominal tyre pressure	5,0 bar	Overall diameter	270 mm
Tyre construction	Bias	Load capacity at 10 km/h	210 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	185 kg
Permitted rim width	2.10 - 4	EAN Tube	8714692285202

260x85 4 PR TL V76

EAN	8714692082450	Section width	90 mm
Nominal tyre pressure	5,0 bar	Overall diameter	270 mm
Tyre construction	Bias	Load capacity at 10 km/h	210 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	185 kg
Permitted rim width	2.10 - 4	EAN Tube	0

260x85 6 PR TT V76

EAN	8714692081903	Section width	90 mm
Nominal tyre pressure	7,0 bar	Overall diameter	270 mm
Tyre construction	Bias	Load capacity at 10 km/h	250 kg
Recommended rim width	2.10 - 4	Load capacity at 20 km/h	225 kg
		EAN Tube	8714692285202

4.10/3.50 - 4 4 PR TT V76

EAN	8714692081897	Section width	95 mm
Nominal tyre pressure	5,0 bar	Overall diameter	280 mm
Tyre construction	Bias	Load capacity at 10 km/h	260 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	230 kg
Permitted rim width	2.50C x 4, 2.50C - 4	EAN Tube	8714692285219

4.00 - 4 4 PR TT V76

EAN	8714692081880	Section width	110 mm
Nominal tyre pressure	5,0 bar	Overall diameter	305 mm
Tyre construction	Bias	Load capacity at 10 km/h	300 kg
Recommended rim width	2.50C x 4	Load capacity at 20 km/h	265 kg
Permitted rim width	2.50C - 4	EAN Tube	8714692285219

4.00 - 4 6 PR TT V76

EAN	8714692105876	Section width	110 mm
Nominal tyre pressure	7,0 bar	Overall diameter	305 mm
Tyre construction	Bias	Load capacity at 10 km/h	350 kg
Recommended rim width	2.50C - 4	Load capacity at 20 km/h	310 kg
		EAN Tube	8714692285219

4.10/3.50 - 6 4 PR TT V76

EAN	8714692081729	Section width	100 mm
Nominal tyre pressure	4,5 bar	Overall diameter	345 mm
Tyre construction	Bias	Load capacity at 10 km/h	280 kg
Recommended rim width	2.50A x 6	Load capacity at 20 km/h	250 kg
Permitted rim width	2.50A - 6	EAN Tube	8714692285219

4.80/4.00 - 8 4 PR TT V76

EAN	8714692081774	Section width	115 mm
Nominal tyre pressure	4,5 bar	Overall diameter	435 mm
Tyre construction	Bias	Load capacity at 10 km/h	440 kg
Recommended rim width	2.50A x 8	Load capacity at 20 km/h	390 kg
Permitted rim width	2.50C - 8	EAN Tube	8714692285264



SMALL TYRES FAST TRAILER



V47

HIGH COMFORT FOR
SMALL TRAILERS

FEATURES	BENEFITS
Speed index “M”	Capable of speeds of up to 130 km/h
Tried and tested construction	Peak loads handled with ease
Strong carcass	Reliable and safe



V48

EACH TRAILER DESERVES
THE BEST TYRE

FEATURES	BENEFITS
Optimised tread contour	Follows the towing vehicle perfectly
Unique tread design	Good aquaplaning resistance
Tread wear indicator	Indicates minimum tread depth



V49

TO ENSURE A COMFORTABLE
ROLLING PERFORMANCE

FEATURES	BENEFITS
Wide profile grooves	High aquaplaning resistance
Flat contour	Good stability
Strong carcass	Long lifespan



V54

THE HEAVY-DUTY
HIGH-SPEED TYRE

FEATURES	BENEFITS
Durable carcass construction	Long, effective lifespan
Thick tread	Greater resistance to punctures
Unique shoulder tread	Good track stability



SMALL TYRES FAST TRAILER



V71

COMBINING SPEED WITH
STABILITY & COMFORT

FEATURES	BENEFITS
Sophisticated tread	Stability & grip on grass or sand
Tubeless specification	Easy to fit
Relatively large contact surface	Comfortable ride



V90

GRIP ON SMOOTH, BUMPY,
SLIPPERY SURFACES

FEATURES	BENEFITS
Special tread	Suitable for a range of surface conditions
Sturdy construction	Operational safety
Rounded contour	Good handling

Profil	Tyre size	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	Page
V47	3.50 - 8	4	46 M	2,5	2.50A x 8	99	389	225
V47	4.00 - 8	4	63 M	3,5	2.50A x 8	114	422	226
V47	4.00 - 8	6	70 M	4,3	2.50A x 8	114	422	226
V47	5.00 - 8	4	71 M	3,5	3.00D x 8	145	478	226
V47	5.00 - 8	6	78 M	5,0	3.00D x 8	145	478	226
V47	5.00 - 10	4	74 M	3,5	3.50B x 10	146	525	226
V47	5.00 - 10	6	80 M	4,0	3.50B x 10	146	525	226
V47	5.00 - 10	8	84 M	5,0	3.50B x 10	146	525	227
V48	18.5x 8.50 - 8	6	78 M	3,6	7.00 x 8	220	475	227
V48	18x 8.0 - 10	6	98 M	6,0	6.00 x 10	188	462	227
V48	20.5x 8.0 - 10	6	84 M	3,4	6.00 x 10	205	524	227
V48	20.5x 8.0 - 10	10	96 M	6,2	6.00 x 10	205	524	227
V49	4.80 - 8	6	71 M	6,3	3.75 x 8	125	429	227
V49	5.70 - 8	6	77 M	5,2	4.50 x 8	156	470	228
V54	4.00 - 8	6	71 M	4,3	3.00D x 8	111	423	228
V54	4.00 - 8	8	75 M	6,0	3.00D - 8	111	423	228
V54	5.00 - 8	6	82 M	6,0	3.00D x 8	141	470	228
V54	5.00 - 8	8	86 M	7,0	3.00D - 8	141	470	228
V54	5.00 - 8	10	89 M	8,5	3.50D - 8	146	470	228
V54	6.00 - 9	6	85 M	4,3	4.00E x 9	166	553	229
V54	6.00 - 9	10	95 M	7,0	4.00E - 9	166	553	229
V54	6.00 - 9	12	99 M	8,3	4.00E - 9	166	553	229
V71	16.5x 6.50 - 8	4	69 M	3,0	5.50A x 8	173	437	229
V71	16.5x 6.50 - 8	6	74 M	4,0	5.50A x 8	173	437	229
V90	4.00 - 8	6	70 M	4,3	2.50A x 8	113	421	229

For the explanation of the symbols and abbreviations, see the inside of the last page.

3.50 - 8 4 PR / 46 M TL V47

EAN	8714692081781	Nominal tyre pressure	2,5 bar
Tyre construction	Bias	Section width	99 mm
Recommended rim width	2.50A x 8	Overall diameter	389 mm
		Load capacity at 130 km/h	170 kg
		EAN Tube	8714692285257

For remarks and the explanation of abbreviations, see inside of the last page.

SMALL TYRES FAST TRAILER

4.00 - 8 4 PR / 63 M TL V47

EAN	8714692081743	Nominal tyre pressure	3,5 bar
Tyre construction	Bias	Section width	114 mm
Recommended rim width	2.50A x 8	Overall diameter	422 mm
Permitted rim width	3.00D x 8	Load capacity at 130 km/h	272 kg
		EAN Tube	8714692285264

4.00 - 8 6 PR / 70 M TL V47

EAN	8714692081934	Nominal tyre pressure	4,3 bar
Tyre construction	Bias	Section width	114 mm
Recommended rim width	2.50A x 8	Overall diameter	422 mm
Permitted rim width	3.00D x 8	Load capacity at 130 km/h	335 kg
		EAN Tube	8714692285264

5.00 - 8 4 PR / 71 M TL V47

EAN	8714692082061	Nominal tyre pressure	3,5 bar
Tyre construction	Bias	Section width	145 mm
Recommended rim width	3.00D x 8	Overall diameter	478 mm
		Load capacity at 130 km/h	345 kg
		EAN Tube	8714692285288

5.00 - 8 6 PR / 78 M TL V47

EAN	8714692082078	Nominal tyre pressure	5,0 bar
Tyre construction	Bias	Section width	145 mm
Recommended rim width	3.00D x 8	Overall diameter	478 mm
		Load capacity at 130 km/h	425 kg
		EAN Tube	8714692285295

5.00 - 10 4 PR / 74 M TL V47

EAN	8714692082276	Nominal tyre pressure	3,5 bar
Tyre construction	Bias	Section width	146 mm
Recommended rim width	3.50B x 10	Overall diameter	525 mm
		Load capacity at 130 km/h	375 kg
		EAN Tube	8714692285349

5.00 - 10 6 PR / 80 M TL V47

EAN	8714692082283	Nominal tyre pressure	4,0 bar
Tyre construction	Bias	Section width	146 mm
Recommended rim width	3.50B x 10	Overall diameter	525 mm
		Load capacity at 130 km/h	450 kg
		EAN Tube	8714692285349

5.00 - 10 8 PR / 84 M TL V47

EAN	8714692082337	Nominal tyre pressure	5,0 bar
Tyre construction	Bias	Section width	146 mm
Recommended rim width	3.50B x 10	Overall diameter	525 mm
		Load capacity at 130 km/h	500 kg
		EAN Tube	8714692285349

18.5x8.5 - 8 6 PR / 78 M TL V48

EAN	8714692082405	Nominal tyre pressure	3,6 bar
Tyre construction	Bias	Section width	220 mm
Recommended rim width	7.00 x 8	Overall diameter	475 mm
		Load capacity at 130 km/h	425 kg
		EAN Tube	8714692285318

18x8.0 - 10 8 PR / 98 M TL V48

EAN	8714692082399	Nominal tyre pressure	6,0 bar
Tyre construction	Bias	Section width	188 mm
Recommended rim width	6.00 x 10	Overall diameter	462 mm
		Load capacity at 130 km/h	750 kg

20.5x8.0 - 10 6 PR / 84 M TL V48

EAN	8714692082382	Nominal tyre pressure	3,4 bar
Tyre construction	Bias	Section width	205 mm
Recommended rim width	6.00 x 10	Overall diameter	524 mm
		Load capacity at 130 km/h	500 kg

20.5x8.0 - 10 10 PR / 96 M TL V48

EAN	8714692082375	Nominal tyre pressure	6,2 bar
Tyre construction	Bias	Section width	205 mm
Recommended rim width	6.00 x 10	Overall diameter	524 mm
		Load capacity at 130 km/h	710 kg

4.80 - 8 6 PR / 71 M TL V49

EAN	8714692082429	Nominal tyre pressure	6,3 bar
Tyre construction	Bias	Section width	125 mm
Recommended rim width	3.75 x 8	Overall diameter	429 mm
Permitted rim width	3.00D x 8	Load capacity at 130 km/h	345 kg
		EAN Tube	8714692285271



SMALL TYRES FAST TRAILER

5.70 - 8 6 PR / 77 M TL V49

EAN	8714692082412	Nominal tyre pressure	5,2 bar
Tyre construction	Bias	Section width	156 mm
Recommended rim width	4.50 x 8	Overall diameter	470 mm
Permitted rim width	3.75 x 8, 3.50D x 8	Load capacity at 130 km/h	415 kg

4.00 - 8 6 PR / 71 M TL V54

EAN	8714692081941	Nominal tyre pressure	4,3 bar
Tyre construction	Bias	Section width	111 mm
Recommended rim width	3.00D x 8	Overall diameter	423 mm
Permitted rim width	2.50A x 8	Load capacity at 130 km/h	345 kg
		EAN Tube	8714692285264

4.00 - 8 8 PR / 75 M TT V54

EAN	8714692081972	Nominal tyre pressure	6,0 bar
Tyre construction	Bias	Section width	111 mm
Recommended rim width	3.00D - 8	Overall diameter	423 mm
Permitted rim width	2.50A x 8	Load capacity at 130 km/h	387 kg
		EAN Tube	8714692285271

5.00 - 8 6 PR / 82 M TL V54

EAN	8714692082016	Nominal tyre pressure	6,0 bar
Tyre construction	Bias	Section width	141 mm
Recommended rim width	3.00D x 8	Overall diameter	470 mm
		Load capacity at 130 km/h	475 kg
		EAN Tube	8714692285295

5.00 - 8 8 PR / 86 M TT V54

EAN	8714692082023	Nominal tyre pressure	7,0 bar
Tyre construction	Bias	Section width	141 mm
Recommended rim width	3.00D - 8	Overall diameter	470 mm
Permitted rim width	3.00D x 8, 3.50D - 8	Load capacity at 130 km/h	530 kg
		EAN Tube	8714692285295

5.00 - 8 10 PR / 89 M TT V54

EAN	8714692082030	Nominal tyre pressure	8,5 bar
Tyre construction	Bias	Section width	146 mm
Recommended rim width	3.50D - 8	Overall diameter	470 mm
		Load capacity at 130 km/h	580 kg
		EAN Tube	8714692285295

V49/V54/V71/V90

6.00 - 9 6 PR / 85 M TT V54

EAN	8714692082207	Nominal tyre pressure	4,3 bar
Tyre construction	Bias	Section width	166 mm
Recommended rim width	4.00E x 9	Overall diameter	553 mm
Permitted rim width	4.00E - 9	Load capacity at 130 km/h	515 kg
		EAN Tube	8714692285325

6.00 - 9 10 PR / 95 M TT V54

EAN	8714692082214	Nominal tyre pressure	7,0 bar
Tyre construction	Bias	Section width	166 mm
Recommended rim width	4.00E - 9	Overall diameter	553 mm
		Load capacity at 130 km/h	690 kg
		EAN Tube	8714692285332

6.00 - 9 12 PR / 99 M TT V54

EAN	8714692082221	Nominal tyre pressure	8,3 bar
Tyre construction	Bias	Section width	166 mm
Recommended rim width	4.00E - 9	Overall diameter	553 mm
		Load capacity at 130 km/h	775 kg
		EAN Tube	8714692285332

16.5x6.5 - 8 4 PR / 69 M TL V71

EAN	8714692082290	Nominal tyre pressure	3,0 bar
Tyre construction	Bias	Section width	173 mm
Recommended rim width	5.50A x 8	Overall diameter	437 mm
		Load capacity at 130 km/h	325 kg
		EAN Tube	8714692285301

16.5x6.5 - 8 6 PR / 74 M TL V71

EAN	8714692082092	Nominal tyre pressure	4,0 bar
Tyre construction	Bias	Section width	173 mm
Recommended rim width	5.50A x 8	Overall diameter	437 mm
		Load capacity at 130 km/h	375 kg
		EAN Tube	8714692285301

4.00 - 8 6 PR / 70 M TL V90

EAN	8714692081866	Nominal tyre pressure	4,3 bar
Tyre construction	Bias	Section width	113 mm
Recommended rim width	2.50A x 8	Overall diameter	421 mm
Permitted rim width	3.00D x 8	Load capacity at 130 km/h	335 kg
		EAN Tube	8714692285264





TECHNICAL INFORMATION AND TUBES

TECHNICAL INFORMATION AND TUBES	pag.
General texts for the graphs and tables	231
Service description	231
Instructions for use of load capacity graphs	232
Tubes	234
Valves	235
Rim and wheel discs	236
Recommendations to extend the life-span	238
Determining gear ratio, rolling circumference and front wheel lead	240
Fitting instructions	243
Weight transfer	244
Names	244

GENERAL TEXTS FOR THE GRAPHS AND TABLES

1. It is recommended not to exceed the maximum tyre pressures shown in the tables and graphs.

2. The dimensions indicated, which apply to a nominal tyre pressure, may vary in practice under the influence of actual tyre pressure and conditions of use.

3. When mounting tubeless tractor tyres, we recommend a TR618A valve.

4. Inner tubes for implement tyres are fitted with TR15 valve, with the exception of 560/60-22.5, 600/55-22.5 and 710/45-22.5. The tubes have a TR218A valve.
5. These specifications may be subject to change without notice.

6. TL = Tubeless. TT = Tube type.

7. 100 kPa = 1.0 bar.
100 kPa = 14.50 PSI.

8. SRI = The Speed Radius Index (SRI) is by convention a parameter used exclusively for the calculation of the theoretical speed of tractors during European Union homologation procedures and for interchangeability of different tyre sizes

SERVICE DESCRIPTION

Load index *											
Li	Kg	Li	Kg	Li	Kg	Li	Kg	Li	Kg	Li	Kg
45	165	68	315	91	615	114	1180	137	2300	160	4500
46	170	69	325	92	630	115	1215	138	2360	161	4625
47	175	70	335	93	650	116	1250	139	2430	162	4750
48	180	71	345	94	670	117	1285	140	2500	163	4875
49	185	72	355	95	690	118	1320	141	2575	164	5000
50	190	73	365	96	710	119	1360	142	2650	165	5150
51	195	74	375	97	730	120	1400	143	2725	166	5300
52	200	75	387	98	750	121	1450	144	2800	167	5450
53	206	76	400	99	775	122	1500	145	2900	168	5600
54	212	77	412	100	800	123	1550	146	3000	169	5800
55	218	78	425	101	825	124	1600	147	3075	170	6000
56	224	79	437	102	850	125	1650	148	3150	171	6150
57	230	80	450	103	875	126	1700	149	3250	172	6300
58	236	81	462	104	900	127	1750	150	3350	173	6500
59	243	82	475	105	925	128	1800	151	3450	174	6700
60	250	83	487	106	950	129	1850	152	3550	175	6900
61	257	84	500	107	975	130	1900	153	3650	176	7100
62	265	85	515	108	1000	131	1950	154	3750	177	7300
63	272	86	530	109	1030	132	2000	155	3875	178	7500
64	280	87	545	110	1060	133	2060	156	4000	179	7750
65	290	88	560	111	1090	134	2120	157	4125	180	8000
66	300	89	580	112	1120	135	2180	158	4250	181	8250
67	307	90	600	113	1150	136	2240	159	4375	182	8500

* Applies to maximum speed as indicated by the Speed Symbol.



TECHNICAL INFORMATION AND TUBES

Speed Symbols

Category	Max. speed in km/h
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50

Category	Max. speed in km/h
C	60
D	65
E	70
F	80
G	90
H	100
I	110
J	120
M	130

INSTRUCTIONS FOR USE OF LOAD CAPACITY GRAPHS

Tyres with the speed symbols A6, A8 or D can be used at higher speeds if the load is reduced. The load capacity charts indicate the maximum speed with the corresponding load capacity. Tractor tyres with speed symbol A8/B are subject to a maximum permitted speed of 50 km/h.

IMPLEMENT TYRES

Low Load Variation (LLV) and High Load Variation (HLV)

In the case of cross-ply implement tyres a distinction should be made between applications in which the load per tyre fluctuates greatly and applications in which the load per tyre is more or less constant. If the load varies by a factor of 2 or more between the laden and non-laden state, we speak of High Load Variation. Where the differences are smaller, we speak of Low Load Variation. For HLV applications, the load capacity per tyre may be increased by 20%, while the tyre pressure must be increased. This distinction is indicated in the graphs. Examples of HLV applications are selfloading trailers and muck spreaders. Examples of LLV applications are tillage machines and towed mowing machines.

Driven/non-driven wheels

If implement tyres are driven, the load capacity is 70% of the value stated in the graph concerned or 12 load index points less than for towed applications. This does not apply to the Flotation Trac and the Flotation Pro, which have the same load capacity whether used in driven or non-driven applications.

Tandem axles

Where implement tyres are fitted on rigid tandem axles, extra lateral forces occur during sharp turns on the road. For that reason we advise maintaining a reserve of 20% for the necessary load capacity of tyres on rigid tandem axles.

Ply rating and service description

Cross-ply implement tyres are given a ply rating or load index/speed symbol (service description). The load index for diagonal implement tyres relates to the load capacity under LLV conditions.

TRACTOR TYRES

Double fitting

If driven wheels are fitted as twinned wheels, the load capacity per tyre is equal to that of one in single fitting, reduced by 12%.


Agricultural work with a high drive torque

If during work, such as ploughing, a high drive torque is required of the tyres, the load capacity with the same tyre pressure will be reduced. The H.T. (High Traction) line for these applications applies to all usual field speeds.


Transport work

For intensive road transport at more than 30 km/h, the tyre pressure of radial tractor tyres should be increased by 0,4 bar.

A distinction is made between the load capacities with drive and non-driven (free) applications. The symbols for this are:



Drive
application



Non-driven
application



TECHNICAL INFORMATION AND TUBES

TUBES

Drive wheels

Tube size	Valve
11.2-24 12.4-24, 320/85-24 13.6-24, 340/85-24, 380/70-24, 440/65-24 14.9-24, 380/85-24, 420/70-24, 480/65-24	TR 218
11.2-28 12.4-28, 320/85-28 13.6-28, 340/85-28, 380/70-28 14.9-28, 380/85-28, 420/70-28, 480/65-28 16.9-28, 420/85-28, 480/70-28, 540/65-28	TR 218
16.9-30, 420/85-30, 480/70-30, 540/65-30	TR 218
12.4-32	TR 218
16.9-34, 420/85-34 18.4-34, 460/85-34, 520/70-34, 600/65-34	TR 218
12.4-36 13.6-36	TR 218
13.6-38 16.9-38, 420/85-38, 480/70-38, 540/65-38 18.4-38, 460/85-38, 520/70-38, 600/65-38 20.8-38, 520/85-38, 580/70-38, 650/65-38	TR 218

Agricultural and horticultural machinery

Tube size	Valve
200x50, 2.00-4 260x85 / 3.00-4 4.00-4, 4.10/3.50-4	TR 87
3.50-6, 4.10/3.50-6 15x6.00-6, 160/65-6	TR 13 / TR 87 TR 13
2.25-8 3.00-8, 3.50-8 4.00-8, 4.80-8 5.00-8 170/60-8, 16.5x6.5-8 18x8.50-8, 210/60-8	V1.04.01* TR 13 TR 13 / TR 87 TR 13 / TR 87 TR 13 TR 13
6.00-9	TR 15 / TR 87
5.00-10	TR 13
4.00-12, 3.50-12	TR 13
200/60-14.5	TR 15

* ETRTO No.


Implement and non-driven steering wheels

Tube size	Valve
7.00-12 10.0/80-12	TR 15
10.0/75-15.3, 260/70-15.3 11.5/80-15.3, 300/80-15.3 12.5/80-15.3	TR 15
400/60-15.5	TR 15
4.50-16, 5.00-16 5.50-16, 6.00-16 6.50-16, 7.00-16 7.50-16 9.00-16 10.00-16 11.00-16 13.0/75-16	TR 15
13.5/75-430.9	TR 15
15.0/55-17, 380/55-17 19.0/45-17, 480/45-17 500/50-17	TR 15
7.50-18 12.5/80-18 15.0/70-18	TR 15
6.00-19	TR 15
7.50-20 9.00-20 10.00-20 11.00-20	TR 15 V3-06-05* V3-06-05* V3-06-05*
560/60-22.5 600/55-22.5 710/45-22.5	TR 218


VALVES

Description	TRA No.	DIN No.	ETRT0 no.	Dimensions (mm)			Valve hole $\varnothing$	Bend angle	MTB bar
				A	B	$\varnothing D$			
Tube valve (1)	TR 13	38 G 11.5	V2-01-1	38	57	11.6	11.3	0°	5,00
	TR 15	38 G 16	V2-01-2	38	57	16.5	15.7	0°	5,00
	TR 150	93 G 16	V3-10-1	93	57	15.7	15.7	0°	7,00
Tubeless valve (2)	TR 412	43 GS 11.5	V2-03-6	33	19.5	15	11.3	0°	4,50
	TR 413		V2-03-1	42.5	19.5	15	11.3	0°	4,75
	TR 415		V2-03-3	42.5	24	19.2	15.7	0°	4,50
Liquid filling valve (3)	TR 218 A	47 GW	V4-03-01	47.5	63.5*	16.2	15.7	0°	10,50
Metal valve (4)	TR 87	33 G 90	V1-08-1	17	33	10	10.2	90°	10,50
Metal tubeless valve (5)	TR 416 S	50 MSW	V2-05-1	36.5	17	8	11.3	0°	14,00
	TR 416		V2-05-2	36.5	17	8	15.7	0°	14,00
	TR 618 A		V5-01-1	51	22.5		15.7	0°	14,00
Triple bend screw-on universal valve (6)			V3-06-5						


MTB = Maximum permissible tyre pressure




1. Tube valve




2. Tubeless valve




3. Liquid filling valve



4. Metal valve



5. Metal tubeless

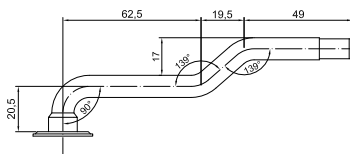

6. Triple bend screw-on universal valve



TECHNICAL INFORMATION AND TUBES

RIM AND WHEEL DISCS


A wheel is made up of a rim and a wheel disc that are fixed to or detachable from each other and must exactly match. The rim size is of crucial importance to the tyre/rim combination.

Size designations of rims

Two wheels are shown here with the associated meanings of the size indications.

Rim choice


When using tubeless tyres, tubeless rims should also be used. A protective flap must always be used when combining inner tubes with multi-piece rims. This prevents damage to the inner tube.



Single rim	Multi-piece rim
4.00 E x 16	13 - 508
This means: 4.00 = rim width code (inches) E = rim flange height x = one piece rim 16 = rim diameter code (inches)	This means: 13 = rim width code (inches) - = multi-piece rim 508 = rim diameter code (mm)

The most important size indications of wheel discs are the following:

- G = diameter of the central hole
- S = pitch circle diameter of the stud holes and number of stud holes
- N = diameter cleat circle and number of cleats
- D = diameter stud hole and stud hole shape
- E = extra stud holes in case of double fitting
- B = outside diameter disc.



Warning


The diameter of different rim sizes may look very similar, but they're not equal as you can see in the table.

"Small" overall diameter		"Large" overall diameter	
Rim size code	Rim diameter D (mm)	Rim size code	Rim diameter D (mm)
430.9 mm	430.9	17	436.6
15	380.2	15.3	388.3
508 mm	508	20	512.8

Always use the rim stipulated

If you use a rim which is too narrow, the tread will be convex and, as is the case where tyre pressure is too high, there will be excessive wear of the centre of the tread.

The fitting of a tyre to the wrong rim can lead to highly dangerous consequences! Fitting a "large" tyre (e.g. 10.0/75-15.3) on a smaller rim (i.e. rim size code 15) is dangerous. The tyre is loose-fitting and in extreme conditions can "blow-off" the ring. Rimchafing can be the consequence. Fitting a "smaller" tyre on a rim which is too large in overall diameter can also be dangerous! As the bead diameter of the tyre is smaller than the base rimflange diameter, by inflating the tyre, the chances of the bead breaking and the tyre exploding are high.

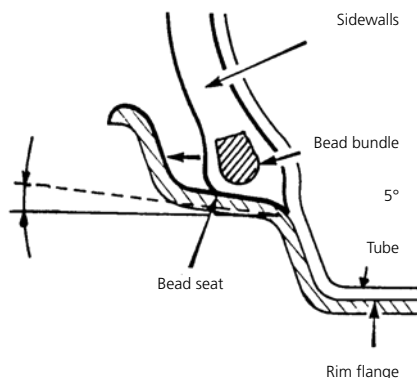



TECHNICAL INFORMATION AND TUBES

RECOMMENDATIONS TO EXTEND THE LIFE-SPAN

Tyre pressure

Correct inflation pressure is important for performance, durability, comfort and traction. It is of crucial importance for the life expectancy of your tyres that you adjust the tyre pressure according to usage and check it regularly. To ensure accurate measurement, the pressure gauge must be calibrated once a year. Measurement of tyre inflation pressure must be done when the tyres are cold. If the pressure in a warm tyre is correct, then it would be too low when the tyre has cooled.

Inflation pressure too low

Under-inflation can reduce the life-span due to:

- damaged carcass cord plies, which can render the tyre unusable;
- increased wear;
- carcass damage close to the bead.

Road use and operation in the field

These two kinds of use require different tyre inflation pressures. Allowance has been made for this in the tyre pressure graphs. Radial and cross-ply tyres must not be used on the same axle, as this can lead to unstable handling.

Visual check

Tyres must be checked regularly for damage. Incision damage can be particularly harmful to the cord tissue layers of the tread.

Oil and grease

To avoid damage to the rubber, tyres should not come into contact with oil and grease.

Frost protection

To protect against frost when water ballasting, sufficient calcium chloride should be added. Please consult your supplier of calcium chloride about the right ratio.

Slippage of the tyre

The following can increase the likelihood of slippage of the tyre on the rim:

- tyre pressure too low;
- faulty fitting of the tyre bead on the rim;
- over use of lubricant when fitting tyre;
- wrong rim size.

The minimum tyre pressure for high-traction work (e.g. ploughing) is 80 kPa when using an inner tube. A lower pressure increases the chances of the tyre turning on the rim and tearing off the valve.

Direction of steering wheels on four wheel drive tractors

When fitting or changing tyres ensure that the directional arrow on the sidewall is pointing forward.

It is possible to fit the front tyres in such a way that the tread turns against the direction of rotation on four wheel drive tractors that are primarily used for transport activities. This will extend the life-span of the tyres. Such fitting is not recommended for field activities as it radically reduces the traction and self-cleaning properties.

Transport instructions

Yes



No





TECHNICAL INFORMATION AND TUBES

DETERMINING GEAR RATIO, ROLLING CIRCUMFERENCE AND FRONT WHEEL LEAD

There is a close relationship between the measurements of the front and rear tyres on four-wheel drive tractors. To get the most from the four wheel drive, the ground speed of the front tyres must be greater than that of the rear tyres - the so-called front wheel lead. With tractors, it is normally stated which tyres can be fitted as standard. A range of sizes is often possible with a certain tractor type, within the borders of a correct front wheel lead.

To optimally exploit the four wheel drive of a tractor, the value of the front wheel lead should be between +1% and +5% (ground speed front tyres > ground speed rear tyres). The permitted front wheel lead value is between 0% and +6%. A front wheel lead below 0% or above +6% can have a negative influence on the tractor's performance and steering (especially on corners), cause excessive wear of the front and rear tyres and premature wear of the gears.


The relationship between the revolutions of the front and rear axles on a mechanical four wheel drive is fixed. This relationship is the gear ratio, which is usually between 1.20 and 1.50, depending on the brand and type of tractor.

The exact mechanical gear ratio is given in the manual of every tractor. The following method can also be used to determine the figure. In addition, there is an explanation of how to determine the rolling circumference of a tyre and the aforementioned front wheel lead.

Determining the rolling circumference of a tyre

Take the measurements on a smooth and hard surface as follows:

1. Switch off the 4WD (the front and rear wheels have to turn independently).
2. Mark the sidewall of a front and rear tyre in the centre of the contact area between tyre and surface.

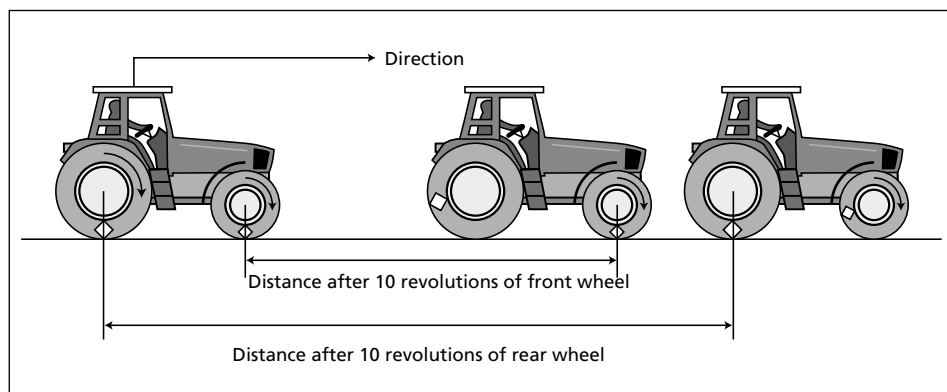

3. Mark the surface at the point where the centre of the contact area of both the front and rear tyres meets that surface (i.e. the point of the marking on the tyres).
4. Drive the tractor in a straight line until the front wheel has made exactly 10 revolutions and mark the surface where the middle of the contact area of the tyre meets the ground (i.e. the point where the marking on the front tyre is after precisely 10 revolutions).
5. Repeat the process for the rear wheel (i.e. make and mark 10 revolutions).
6. Measure the distance between the markings of the start and finishing point of 10 revolutions of the front and rear wheels.
7. Calculate the rolling circumference of the front and rear tyres as follows:

rolling circumference front (in mm)
 = distance covered by
 front wheel / number of
 revolutions


rolling circumference rear (in mm)
 = distance covered by
 rear wheel / number of
 revolutions

Determining the front wheel lead

The following conditions are required to measure the front wheel lead: The tractor must be fitted with the standard front ballast and the tyres set to a nominal pressure. At least 60 metres of clear road is necessary.

To determine the front wheel lead:

1. Switch off the 4WD.
2. Mark the sidewall of a front and rear tyre at the contact point between tyre and ground.
3. Drive the tractor for a distance of exactly 10 revolutions of the rear wheel and accurately count the number of front wheel revolutions at the same time (i.e. including the part of the last, incomplete revolution).
4. Repeat the measuring with the 4WD switched on.
5. Calculate the front wheel lead by dividing the number of front wheel revolutions with the 4WD switched on by the number when switched off.

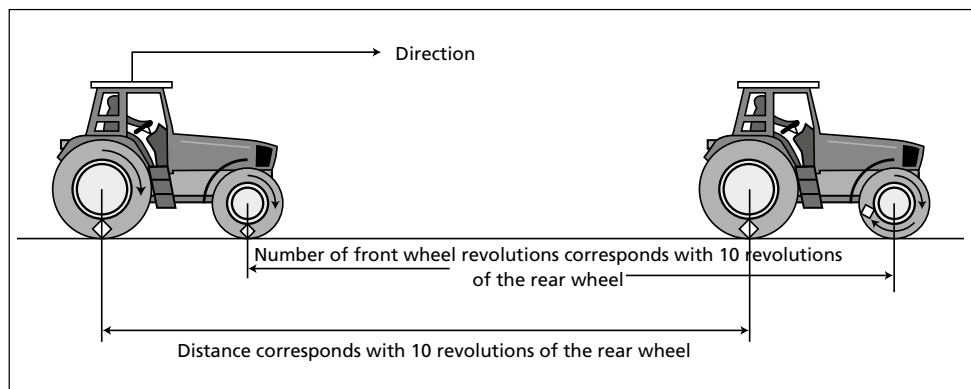



TECHNICAL INFORMATION AND TUBES

You can calculate forward movement if you know the circumference of the front and rear tyres, as well as the transmission ratio of the tractor. Use the formula given below:

$$\% \text{ front wheel lead} = \frac{\text{Front tyre rolling circumference} \times \text{gear ratio}}{\text{Rear tyre rolling circumference}} - 1 \times 100\%$$

Determining the gear ratio

To determine the gear ratio:

1. Switch on the 4WD.
2. Mark the sidewall of a front and rear tyre at the contact point between tyre and ground.
3. Drive the tractor for a distance of exactly 10 revolutions of the rear wheel and accurately count the number of front wheel revolutions at the same time (i.e. including the part of the last, incomplete revolution).
4. Calculate the gear ratio by dividing the number of front wheel revolutions by the number of rear wheel revolutions, e.g.:

$$\text{Gear ratio} = \frac{\text{Number of front wheel revolutions}}{\text{Number of rear wheel revolutions}}$$

FITTING INSTRUCTIONS

Pay attention to the following safety regulations and legal requirements when fitting agricultural tyres:

1. Only use the recommended rims.
2. Check that the rims are in good condition (rust-free, no bent rim flange, etc.).
3. Put lubricant on the tyre beads and rim.
4. Always use new Vredestein inner tubes of corresponding size when fitting new tube type tyres.
5. Secure the wheel during inflation, preferably in a proper safety cage.
6. Only use an air hose with a pressure gauge that is fitted at a sufficiently safe distance from the valve connection.
7. Never pump the tyres higher than 250 or 300 kPa when fitting, as indicated on the side of the tyre.
8. If the beads do not appear to be properly seated on the rim flange after fitting, do not try and correct this by inflating above 250 kPa. Deflate the tyre, re-centre the beads and reinflate.

2,5 bar MAX



9. The tyre pressure should match the prescribed values based upon the maximum load, maximum speed and working conditions. Use the Vredestein load capacity chart/tyre pressure table for reference.



TECHNICAL INFORMATION AND TUBES

WEIGHT TRANSFER

The weight distribution between the front and rear axles is crucial to how a tractor drives and steers. Attaching implements and/or trailers can alter the weight distribution. Proper weight distribution ensures optimal pulling power is provided by the driven wheels, which have maximum grip when they are used at full load with the appropriate tyre pressure.

Always make sure at least 20% of the total weight of the tractor continues to rest on the front axle in order to keep the tractor under control.


Excessive loading causes:

- overloading of the tyres, resulting in more wear and possible carcass defects
- increased rolling resistance, resulting in reduced traction and extra fuel consumption
- ruts in the field
- higher soil compaction, resulting in damage to the soil and reduced yields.

Insufficient loading causes:

- more slip, resulting in reduced traction power and more damage to the soil
- higher fuel consumption
- rapid tyre wear
- poor steering.

NAMES

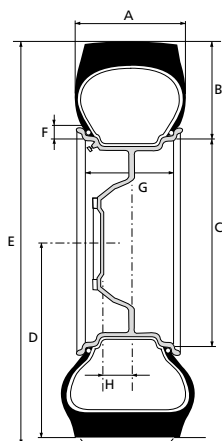

- A : Section width
- B : Section height
- C : Rim diameter
- D : Static loaded radius
- E : Overall diameter
- F : Rim bead height
- G : Rim width
- H : Offset



520/85 R 42 155 A8/B TL

520	=	Nominal section width (in mm)
85	=	Aspect ratio in %
R	=	Radial construction
42	=	Rim diameter code (in inches)
155 A8/B	=	Maximum 4125 kg at 40-50 km/h
TL	=	Tubeless



16.9-30 8 PR 137 A8 TT

16.9	=	Nominal section width (in inches)
-	=	Diagonal construction
30	=	Rim diameter code (in inches)
8PR	=	Carcass strength
137 A8	=	Maximum 2300 kg at 50 km/h
TT	=	Tube type



10.00 - 16 8PR TT

10.00	=	Nominal section width (in inches)
-	=	Cross-ply construction
16	=	Rim diameter code (in inches)
8PR	=	Carcass strength
TT	=	Tube type



710/50 R 26.5 170D TL

710	=	Nominal section width (in mm)
50	=	Aspect ratio in %
R	=	Radial construction
26.5	=	Rim diameter code (in inches)
170 D	=	Maximum 6000 kg at 65 km/h
TL	=	Tubeless



13.5/75 - 430.9 14PR TL

13.5	=	Nominal section width (in inches)
75	=	Aspect ratio in %
-	=	Cross-ply construction
430.9	=	Rim diameter code (in mm)
14 PR	=	Carcass strength
TL	=	Tubeless



18 x 8.50 - 8 6PR TL

18	=	Nominal tyre diameter (in inches)
8.50	=	Nominal section width (in inches)
-	=	Cross-ply construction
8	=	Rim diameter code (in inches)
6PR	=	Carcass strength
TL	=	Tubeless

NOTES

GENERAL REMARKS

	The dimensions indicated, which apply to a nominal tyre pressure, may vary in practice under the influence of actual tyre pressure and conditions of use.
	These specifications may be subject to change without notice. No liability accepted for errors or misprints.
	It is recommended not to exceed the maximum tyre pressures shown in the tables.
	1 bar = 100 kPa = 14,5 psi
	A6 = 30 km/h; A8 = 40 km/h; A8/B = 40/50 km/h; D = 65 km/h
	TL = Tubeless; TT = Tube Type
	"Tread depth (including tie bar)" means the tread depth on top of the tie bar, with the height of the tie bar added.
	For radial tractor drive tyres applies: For intensive transport activities at more than 30 km/h, the tyre pressure should be increased by 0,4 bar.
	For radial tractor drive tyres applies: When working on slopes over 20%, the tyre pressure should be increased by 0,4 bar.

SYMBOLS AND ABBREVIATIONS

SRI	Speed Radius Index
VF	Very High Flexion
NRO	Narrow Rim Option. The NRO marking allows the use of a narrower rim width than normally permitted by ETRTO standards for either IF or VF tyres of the same size. When using NRO rim, the tyre pressure should be increased by 0,2 bar.
PFO	Pressure Field Operation. Technology to allow a VF tyre operate at lower pressure at lower speeds (in the field).
	Section width (mm), a tolerance of $\pm 2\%$ applies.
	Overall diameter (mm), a tolerance of $\pm 2\%$ applies.
	Static loaded radius (mm), a tolerance of $\pm 2\%$ applies.
	Rolling circumference (mm), a tolerance of $\pm 2\%$ applies.
	Rim width and contour
	Non-driven / trailed / free-rolling application.
	Driven application.
10C	Cyclic field activities at low torque up to 10 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 1500 meter. For slopes of over 10% up to 20% increase the inflation pressure with 0,5 bar. For slopes over 20% only the basic load capacity applies.
10CI	Cyclic activities at low torque up to 10 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 600 meter.
10H	Field activities where high torque is required at maximum 10 km/h.
10L	Activities where low torque is required at maximum 10 km/h.
15C	Cyclic field activities at low torque up to 15 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 1500 meter. For slopes of over 10% up to 20% increase the inflation pressure with 0,5 bar. For slopes over 20% only the basic load capacity applies.
#	Consult Apollo Vredestein for this rim width.
*	Calculated value.
**	In case these tyres are driven, 70% of the load capacity in non-driven application applies.
***	When fitted on free-rolling steering wheels of self propelled agricultural equipment, tyre load capacities are 80% of the loads for free-rolling applications.

**FOR THE REMARKS AND THE
EXPLANATION OF ABBREVIATIONS,
SEE OTHER SIDE OF THIS FLAP.**

**VREDESTEIN
AGRICULTURAL TYRES
TECHNICAL DATA BOOK**

2019-2020

HEADOFFICE
APOLLO VREDESTEIN B.V.
+31 (0)53 4 888 888
agri-ind@apollovredestein.com

POLAND
APOLLO VREDESTEIN OPONY POLSKA SP. Z O.O.
+48 22 886 81 00
customer.pl@apollovredestein.com

SCANDINAVIA
APOLLO VREDESTEIN NORDIC AB
031-58 00 10
customer.se@apollovredestein.com

UNITED KINGDOM
APOLLO VREDESTEIN (UK) LTD.
0330-333 1294
customer.uk@apollovredestein.com

USA AND CANADA
**APOLLO VREDESTEIN TYRES
NORTH AMERICA, INC.**
770 302 2163 | 877 234 0867
contact.us@apollovredestein.com

For other sales offices or Vredestein importers see www.vredestein.com

